

# Network Remote Control System SCU-LAN10 Operation Manual

"Introduction" .....	Page 8
"Basic Operation (FTDX101MP/D)" .....	Page 10
"On Screen Functions & Controls (FTDX101MP/D)" .....	Page 17
"Basic Operation (FTDX10)" .....	Page 49
"On Screen Functions & Controls (FTDX10)" .....	Page 56
"Basic Operation (FT-710)" .....	Page 87
"On Screen Functions & Controls (FT-710)" .....	Page 94

# Table of Contents

<b>Introduction .....</b>	<b>8</b>
Important .....	8
Important Notes .....	8
Precautions for use .....	8
Trademarks .....	8
Other notes and restrictions .....	9
<b>Basic Operation (FTDX101MP/D) .....</b>	<b>10</b>
Starting the SCU-LAN10 Remote Software .....	10
Remote control software screen .....	11
Select screen layout .....	11
Adjusting the receiver volume .....	12
AF GAIN (Speaker icon) .....	12
Change frequency .....	12
Switch frequency band .....	12
Change frequency .....	12
(1) Mouse wheel operation and drag operation .....	12
(2) Change the frequency on the spectrum scope screen .....	14
(3) Enter the frequency on the numeric keypad screen .....	15
Meter operation selection during transmit .....	16
Transmitting .....	16
<b>On Screen Functions &amp; Controls (FTDX101MP/D) .....</b>	<b>17</b>
Power button .....	17
Remote button .....	17
Screen layout selection button .....	18
Transmission function button .....	19
TUNE button .....	19
VOX button .....	19
MIC GAIN/PROC button .....	19
MONI button .....	20
SPEED/PITCH button .....	20
SYNC button .....	20
SPLIT button .....	20
FUNC button (Function menu display) .....	21
RF POWER button .....	21
MONI LEVEL button .....	22
DNR LEVEL button .....	22
NB LEVEL button .....	22
VOX GAIN button .....	22
VOX DELAY button .....	22
ANTI VOX button .....	22
MEM CH button .....	22
M-GROUP button .....	23
R.FIL button .....	23
RPT button .....	23
MIC EQ button .....	23
ENC/DEC button .....	23
TONE FREQ button .....	23
QMB LIST button .....	24
Spectrum scope area .....	25
Screen operation .....	25
Scope function button .....	26
CENTER / CURSOR / FIX button .....	26

SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons .....	27
SPAN button .....	27
3DSS button .....	27
MONO (Dual/Mono Switching) button .....	28
MULTI (Multi display switching) button .....	28
HOLD button .....	28
ZIN (auto Zero-in) button .....	28
S.MENU button (Spectrum scope menu display) .....	29
<b>Oscilloscope / AF-FFT area .....</b>	<b>31</b>
Screen operation .....	31
<b>MAIN band / SUB band operation area .....</b>	<b>32</b>
Meter operation selection during transmit .....	32
Selecting the memory channel .....	33
Selecting the QMB channel .....	33
Selecting the operating mode .....	33
Frequency change operation .....	34
Switch frequency band .....	34
MHz digit .....	34
kHz digit .....	35
Hz digit .....	35
QMB Operation .....	36
MAIN $\blacktriangleleft$ SUB / SUB $\blacktriangleright$ MAIN operation .....	36
CLAR (Clarifier) operation .....	36
Receiver setting operation .....	37
ANT (Switching the Antenna) button .....	37
ATT (Attenuator) button .....	37
IPO (Intercept Point Optimization) button .....	37
R.FIL (Roofing Filter Switching) button .....	37
AGC (Automatic Gain Control) button .....	38
Memory channel operation .....	38
V/M button .....	38
M $\blacktriangleright$ V button .....	38
V $\blacktriangleright$ M button .....	38
Memory channel list operation .....	39
Read memory data from radio .....	39
Transfer memory data to transceiver .....	39
Recall memory channel .....	39
Move memory data to VFO .....	39
Write to memory .....	40
Erase / Resume Memory Channel .....	40
Editing memory channels .....	40
AF Gain / RF Gain adjustment .....	41
AF (Speaker icon) .....	41
RF (RF GAIN) / SQL .....	41
SHIFT/WIDTH operation .....	41
SHIFT button .....	41
WIDTH button .....	42
Operation of the filter function display area .....	42
Interference Reduction Systems operation .....	42
NB (Noise blanker) button .....	42
DNR (Digital Noise Reduction) button .....	43
DNF (Digital NOTCH Filter) button .....	43
NOTCH (IF NOTCH Filter) button .....	43
CONT (Contour) button .....	43
APF (Audio Peak Filter) button .....	43
VC TUNE operation .....	44
VC TUNE button .....	44
RX/TX buttons operation .....	44
RX button .....	44
TX button .....	44

PTT operation .....	45
PTT .....	45
<b>MENU bar .....</b>	<b>46</b>
File .....	46
Setup .....	46
Help .....	48
Shortcut keys .....	48
<b>Basic Operation (FTDX10) .....</b>	<b>49</b>
Starting the SCU-LAN10 Remote Software .....	49
Remote control software screen .....	50
Select screen layout .....	50
Adjusting the receiver volume .....	51
AF GAIN (Speaker icon) .....	51
Change frequency .....	51
Switch frequency band .....	51
Change frequency .....	51
(1) Mouse wheel operation and drag operation .....	51
(2) Change the frequency on the spectrum scope screen .....	53
(3) Enter the frequency on the numeric keypad screen .....	54
Meter operation selection during transmit .....	55
Transmitting .....	55
<b>On Screen Functions &amp; Controls (FTDX10) .....</b>	<b>56</b>
Power button .....	56
Remote button .....	56
Screen layout selection button .....	57
Transmission function button .....	58
TUNE button .....	58
VOX button .....	58
MIC GAIN/PROC button .....	58
MONI button .....	59
SPEED/PITCH button .....	59
TXW button .....	59
SPLIT button .....	59
FUNC button (Function menu display) .....	60
RF POWER button .....	60
MONI LEVEL button .....	61
DNR LEVEL button .....	61
NB LEVEL button .....	61
VOX GAIN button .....	61
VOX DELAY button .....	61
ANTI VOX button .....	61
MEM CH button .....	61
M-GROUP button .....	62
R.FIL button .....	62
RPT button .....	62
MIC EQ button .....	62
ENC/DEC button .....	62
TONE FREQ button .....	62
QMB LIST button .....	63
Spectrum scope area .....	64
Screen operation .....	64
Scope function button .....	65
CENTER / CURSOR / FIX button .....	65
SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons .....	66
SPAN button .....	66
3DSS button .....	66
MULTI (Multi display switching) button .....	67

HOLD button .....	67
ZIN (auto Zero-in) button .....	67
S.MENU button (Spectrum scope menu display) .....	68
<b>Oscilloscope / AF-FFT area .....</b>	<b>70</b>
Screen operation .....	70
<b>VFO-A / VFO-B operation area .....</b>	<b>71</b>
Meter operation selection during transmit .....	71
Selecting the memory channel .....	72
Selecting the QMB channel .....	72
Selecting the operating mode .....	72
Frequency change operation .....	73
Switch frequency band .....	73
MHz digit .....	73
kHz digit .....	74
Hz digit .....	74
QMB Operation .....	75
VFO-A / VFO-B operation .....	75
CLAR (Clarifier) operation .....	76
Receiver setting operation .....	76
ATT (Attenuator) button .....	76
IPO (Intercept Point Optimization) button .....	76
R.FIL (Roofing Filter Switching) button .....	76
AGC (Automatic Gain Control) button .....	77
Memory channel operation .....	77
M button .....	77
V/M button .....	77
Memory channel list operation .....	78
Read memory data from radio .....	78
Transfer memory data to transceiver .....	78
Recall memory channel .....	78
Move memory data to VFO .....	78
Write to memory .....	79
Erase / Resume Memory Channel .....	79
Editing memory channels .....	79
AF Gain / RF Gain adjustment .....	80
AF (Speaker icon) .....	80
RF (RF GAIN) / SQL .....	80
SHIFT/WIDTH operation .....	80
SHIFT button .....	80
WIDTH button .....	80
Operation of the filter function display area .....	81
Interference Reduction Systems operation .....	81
NB (Noise blanker) button .....	81
DNR (Digital Noise Reduction) button .....	81
DNF (Digital NOTCH Filter) button .....	81
NOTCH (IF NOTCH Filter) button .....	82
CONT (Contour) button .....	82
APF (Audio Peak Filter) button .....	82
PTT operation .....	83
PTT button .....	83
<b>MENU bar .....</b>	<b>84</b>
File .....	84
Setup .....	84
Help .....	86
<b>Shortcut keys .....</b>	<b>86</b>
<b>Basic Operation (FT-710) .....</b>	<b>87</b>
Starting the SCU-LAN10 Remote Software .....	87
Remote control software screen .....	88

Select screen layout .....	88
Adjusting the receiver volume .....	89
AF GAIN (Speaker icon) .....	89
Change frequency .....	89
Switch frequency band .....	89
Change frequency .....	89
(1) Mouse wheel operation and drag operation .....	89
(2) Change the frequency on the spectrum scope screen .....	91
(3) Enter the frequency on the numeric keypad screen .....	92
Meter operation selection during transmit .....	93
Transmitting .....	93
<b>On Screen Functions &amp; Controls (FT-710) .....</b>	<b>94</b>
Power button .....	94
Remote button .....	94
Screen layout selection button .....	95
Transmission function button .....	96
TUNE button .....	96
VOX button .....	96
MIC GAIN/PROC button .....	96
MONI button .....	97
SPEED/PITCH button .....	97
TXW button .....	97
SYNC button .....	97
SPLIT button .....	97
FUNC button (Function menu display) .....	98
RF POWER button .....	98
MONI LEVEL button .....	99
DNR LEVEL button .....	99
NB LEVEL button .....	99
VOX GAIN button .....	99
VOX DELAY button .....	99
ANTI VOX button .....	99
MEM CH button .....	99
M-GROUP button .....	100
RPT button .....	100
MIC EQ button .....	100
ENC/DEC button .....	100
TONE FREQ button .....	100
QMB LIST button .....	100
Spectrum scope area .....	101
Screen operation .....	101
Scope function button .....	102
CENTER / CURSOR / FIX button .....	102
SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons .....	103
SPAN button .....	103
3DSS button .....	103
MULTI (Multi display switching) button .....	103
HOLD button .....	104
ZIN (auto Zero-in) button .....	104
S.MENU button (Spectrum scope menu display) .....	105
Oscilloscope / AF-FFT area .....	107
Screen operation .....	107
VFO-A / VFO-B operation area .....	108
Meter operation selection during transmit .....	108
Selecting the memory channel .....	109
Selecting the QMB channel .....	109
Selecting the operating mode .....	109

Frequency change operation .....	110
Switch frequency band .....	110
MHz digit .....	110
kHz digit .....	111
Hz digit .....	111
QMB Operation .....	112
VFO-A / VFO-B operation .....	112
CLAR (Clarifier) operation .....	113
Receiver setting operation .....	113
ATT (Attenuator) button .....	113
IPO (Intercept Point Optimization) button .....	113
AGC (Automatic Gain Control) button .....	113
Memory channel operation .....	114
M button .....	114
V/M button .....	114
Memory channel list operation .....	115
Read memory data from radio .....	115
Transfer memory data to transceiver .....	115
Recall memory channel .....	115
Move memory data to VFO .....	115
Write to memory .....	116
Erase / Resume Memory Channel .....	116
Editing memory channels .....	116
AF Gain / RF Gain adjustment .....	117
AF (Speaker icon) .....	117
RF (RF GAIN) / SQL .....	117
SHIFT/WIDTH operation .....	117
SHIFT button .....	117
WIDTH button .....	117
Operation of the filter function display area .....	118
Interference Reduction Systems operation .....	118
NB (Noise blanker) button .....	118
DNR (Digital Noise Reduction) button .....	118
DNF (Digital NOTCH Filter) button .....	118
NOTCH (IF NOTCH Filter) button .....	119
CONT (Contour) button .....	119
APF (Audio Peak Filter) button .....	119
PTT operation .....	120
PTT button .....	120
<b>MENU bar .....</b>	<b>121</b>
File .....	121
Setup .....	121
Help .....	123
<b>Shortcut keys .....</b>	<b>123</b>

## Introduction

The SCU-LAN10 and the Network Remote-control software make available remote operation of compatible transceivers using the Internet or LAN.

### Important

Before downloading this software, please read the “Important Notes” carefully.

Downloading or installing this software will be taken as indicating your agreement with the contents of the “Important Notes”.

### Important Notes

- To remotely control a transceiver using the SCU-LAN10, be sure that you comply with your local regulations.
- All responsibility for the use of this software lies with the customer. Yaesu cannot be held responsible in any way for any damages or losses which may be incurred by the customer as a result of using this software.
- Copyrights and all other intellectual property rights for the software, as well as the software manual, are the property of YAESU MUSEN CO., LTD.
- The revision, modification, reverse engineering, and decompiling of this software is prohibited. Redistribution, transfer, and resale of downloaded files are also prohibited.
- Downloaded files may only be used for personal use.

### Precautions for use

- Settings for remote operation require knowledge of PCs and networks as well as transceiver settings. We do not provide support for the PC settings or network settings.
- For the operation of a PC and peripheral devices, follow the instructions provided in the manuals that come with the PC and peripheral devices.
- To use SCU-LAN10, you need to open the port of the router and change the settings of the firewall and security software. Customers are responsible for network security when using this product.
- In communication using a network, changes in audio, operation delay, and changes in voice quality occur, this cannot be improved in principle.
- Depending on the environment or status of a network, PC, OS, security software, etc., the procedures described in this manual may not as expected.
- As a result of using SCU-LAN10 and software, we will not be liable for incidental damages such as damages caused by missed communication and call opportunities due to customer’s incorrect settings, or malfunctions. Use of this software is at your own risk. Yaesu shall not be liable for any damages caused to you by using this software.

### Trademarks

Microsoft®, Windows®, Windows® 10, Windows® 11 are registered trademarks in the United States and other countries.



## Other notes and restrictions

---

In principle, when performing remote operation via a network, delays and data loss are inevitable, and smooth operation may not be possible as in direct transceiver operation. Specifically, the following phenomena may occur.

- Sound may be interrupted
- Since the transmit / standby timing may be delayed, it is not suitable for communications that require quick response such as contests and pileups.
- The voice quality of the transmit and receive audio is altered.
- It does not support image communication such as SSTV and digital mode communication such as RTTY (AFSK), JT65, FT8
- CW mode reception is supported, but remote station operation in CW mode is not possible.

### ● Supported Transceivers

FTDX101MP, FTDX101D, FTDX10, FT-710 (As of October 2023)

#### • Supported Firmware



Update to the latest software and firmware on the YAESU website (<https://www.yaesu.com>).

---

<b>FTDX101MP/D</b>	MAIN:	V01-14 or later
	DISPLAY:	V01-06 or later
	IF DSP:	V01-05 or later
	SDR:	V02-03 or later
	AF:	V01-00 or later
<b>FTDX10</b>	MAIN:	V01-01 or later
	DISPLAY:	V01-01 or later
	IF DSP:	V01-01 or later
	SDR:	V01-00 or later
	AF:	V01-00 or later
<b>FT-710</b>	MAIN:	V01-11 or later
	DISPLAY:	V01-08 or later
	IF DSP:	V01-01 or later
	SDR:	V01-04 or later

# Basic Operation (FTDX101MP/D)


## Starting the SCU-LAN10 Remote Software

1. Click the Windows **Start** button, and then click the [YAESU SCU-LAN10] icon in the “Yaesu Musen” group to start the remote-control software.



- You can also double-click the [YAESU SCU-LAN10] icon on the desktop to start the remote-control software.
- If the transceiver (FTDX101) to be used is not set to “**Connection Setup**” of the “**Setup**” menu on the upper left of the screen, some functions and the screen display will not work properly. For details on the settings, refer to “**SCU-LAN10 Installation Manual**”.
- When connecting to the SCU-LAN10 for the first time, the “**Connection Setup**” screen will be displayed automatically. Set it by referring to the “**SCU-LAN10 Installation Manual**”.

2. Click the [  ] button.

The “  ” button and the “**REMOTE**” button turns red during remote control.



- The [REMOTE] button starts or stops the remote control. Click the [REMOTE] button to turn it ON automatically when the transceiver is turned OFF. If the remote control is disconnected due to network instability, you can restart it by clicking the [REMOTE] button.
- When using the remote-control software for the first time, a warning screen of Windows or firewall software may appear. In this case, set it to allow (unblock) Internet access from the remote-control software.




## Remote control software screen


By default, the MAIN band is displayed on the upper area of the screen, the SUB band is displayed on the lower area, the spectrum scope is displayed on the left side of the screen, and the frequency and meter are displayed on the right side.



- The size and layout of each area will be adjusted automatically depending on the screen resolution of your computer, so the display may differ slightly from the example below.
- In the display example below, the **[MULTI]** button is may be clicked to display the oscilloscope and the AF-FFT.

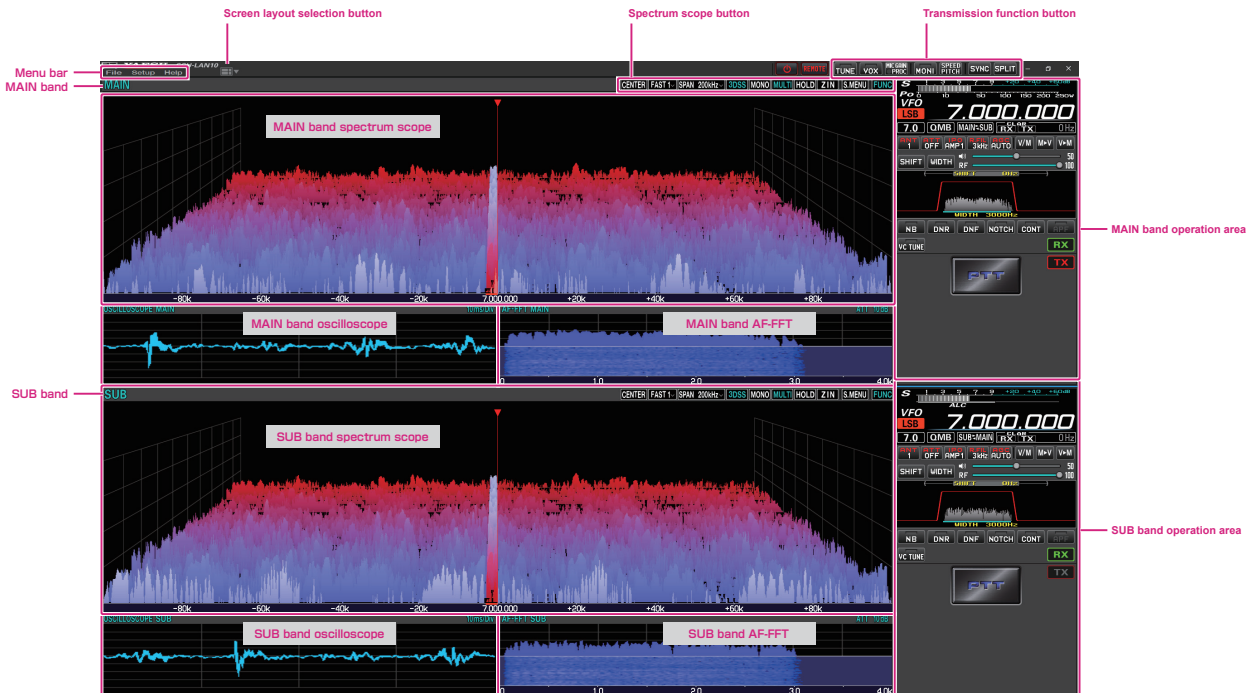

## Select screen layout

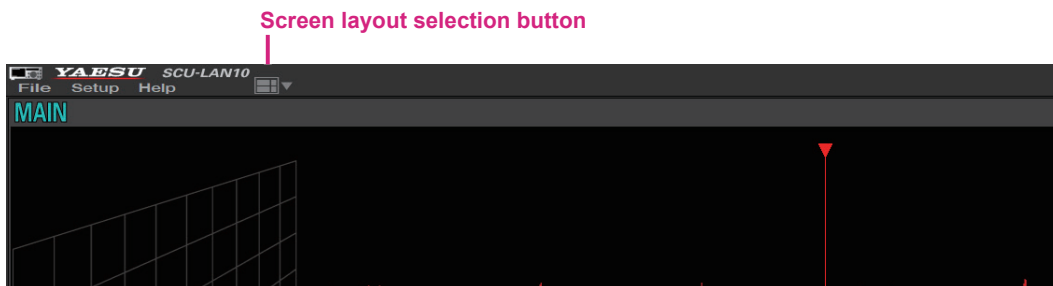


**Click:** Select the screen layout from 6 types.



**Click & Hold:** Returns the size of each area on the screen to the default settings.

## Adjusting the receiver volume

### AF GAIN (Speaker icon)

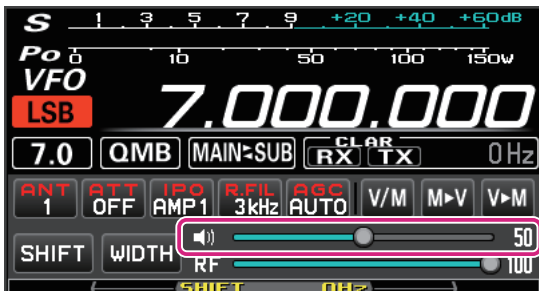

Turn the **mouse wheel**, or drag or click on the slide bar to adjust the receive audio to a comfortable volume.



- Each time you click the speaker icon, mute & mute cancel are switched.
- Keyboard shortcuts  
MAIN band: Arrow keys (Up/Down)  
SUB band: Shift + Arrow keys (Up/Down)

## Change frequency

### Switch frequency band

1. Click the MHz digit or the Band icon to display the band selection screen.



2. Click the desired band.




### Change frequency

There are three ways to change the frequency:

#### (1) Mouse wheel operation and drag operation

##### • MHz digit


1. When you mouse over the MHz digit of the frequency, the number turns green.

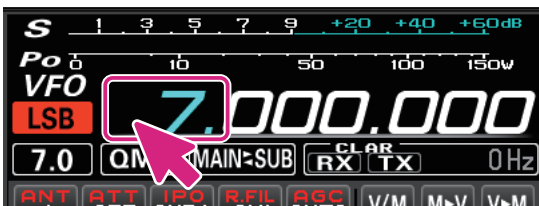

2. In this state, turning the mouse wheel will change the frequency in 1MHz steps.

### ● kHz digit

1. When you mouseover the 3 digits of the frequency from 100kHz to 1kHz, the digits higher than 1kHz turn green.

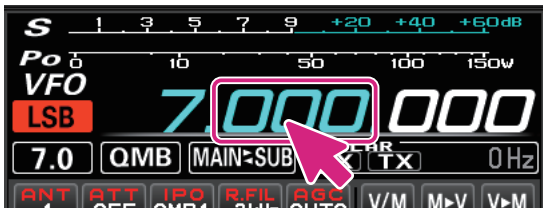

2. In this state, turning the mouse wheel will change the frequency in the set “FAST” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “FAST” step.
  - If you move the mouse up or down while clicking the number, the frequency will change continuously with the set “FAST” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “**Changing the tuning step**” on the next page.



By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.

### ● Hz digit

1. When you mouseover the 3 digits of the frequency from 100Hz to 1Hz, all the digits of the frequency change to green.




2. In this state, turning the mouse wheel will change the frequency in the set “TUNING” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “TUNING” steps.
  - If you click the number and then move the mouse up or down, the frequency will change continuously at the “TUNING” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “**Changing the tuning step**” on the next page.



- By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.
- Turning the wheel while holding down the [SHIFT] key on the keyboard does not change the TUNING step to the FAST step.
- Keyboard shortcuts
  - MAIN band: Page Up / Page Down keys
  - SUB band: Shift + Page Up / Page Down keys


• **Change the frequency step**

1. Right-click on the digit from 100kHz to 1Hz of the frequency to display the setting screen for the FAST step and TUNING step.
2. Click on the desired FAST step or TUNING step.

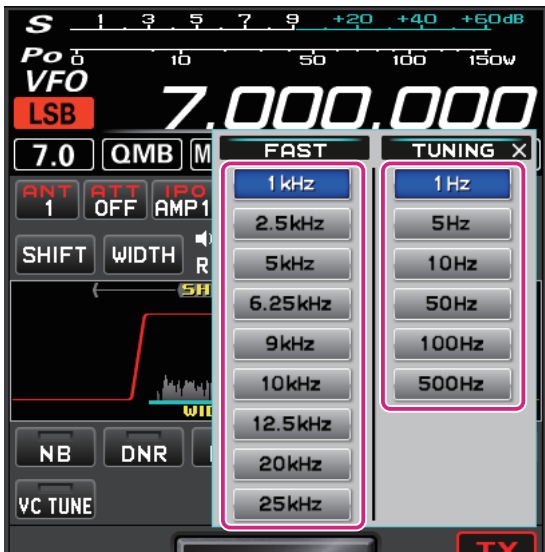


**(2) Change the frequency on the spectrum scope screen**

1. Move the mouse cursor to the display area of the spectrum scope and turn the mouse wheel to change the frequency in the set “TUNING” step.
  - In the Spectrum Scope screen, press and hold the [SHIFT] key on the keyboard and turn the mouse wheel to increase or decrease the frequency in the set FAST steps.
  - When you click on the point you want to receive such as the peak of the signal on the spectrum scope screen, the frequency jumps to the vicinity. You can then turn the mouse wheel to fine tune the frequency and hear the desired signal.

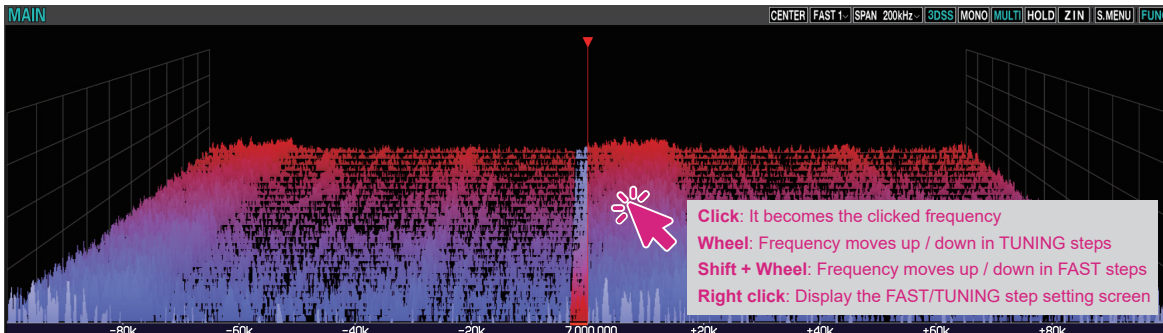


### (3) Enter the frequency on the numeric keypad screen

1. Right-click on the MHz digit of the frequency to display the numeric keypad screen.

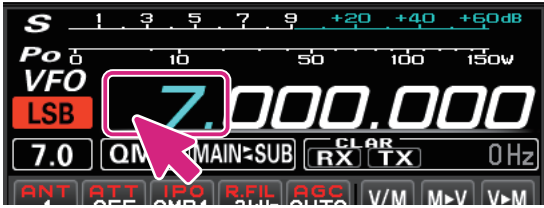

2. You can enter the frequency by clicking on the screen or using the keys on your computer.



#### Keyboard operation:

**Enter** key: Finish the input (**ENT**)


**Backspace** key: Delete the character before the cursor (**←X**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

#### ● Select mode

1. Click the mode icon.

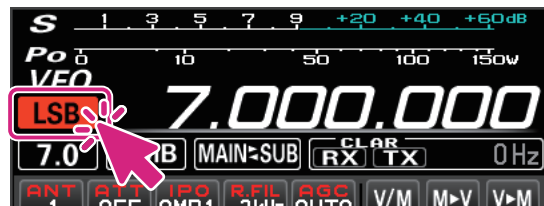

2. Click on the desired mode.




- 
- You can right-click the mode icon to switch between the following modes with one touch:  
**LSB↔USB; CW-L↔CW-U; AM↔AM-N; FM↔FM-N; DATA-L↔DATA-U; DATA-FM↔D-FM-N; RTTY-L↔RTTY-U**
  - Keyboard shortcuts  
LSB / USB: F1 key (MAIN band) / Shift + F1 key (SUB band)  
CW-L / CW-U: F2 key (MAIN band) / Shift + F2 key (SUB band)  
AM: F3 key (MAIN band) / Shift + F3 key (SUB band)  
FM: F4 key (MAIN band) / Shift + F4 key (SUB band)
- 



## Meter operation selection during transmit

---

1. Click on the S/Power meter.

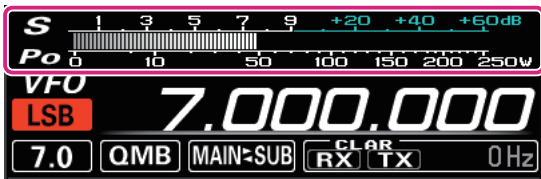

2. Click on the desired meter function.



## Transmitting

---

1. While clicking and holding the **PTT** button, the transceiver will be in transmit status.

The TX icon is displayed above the frequency during transmission.



Keyboard shortcuts  
Space key

---

2. Speak into the microphone of the computer.
3. Release the PTT button to return to receive.

### ● Change to the MOX button

Change the PTT button to the MOX button.

1. Right-click the PTT button to display the “PTT” and “MOX” setting screens.




2. Click MOX.




# On Screen Functions & Controls (FTDX101MP/D)

## Power button

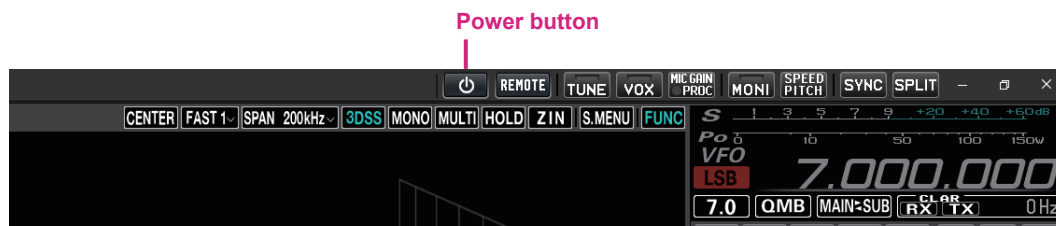

**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver automatically turns OFF and remote control stops.

## Remote button

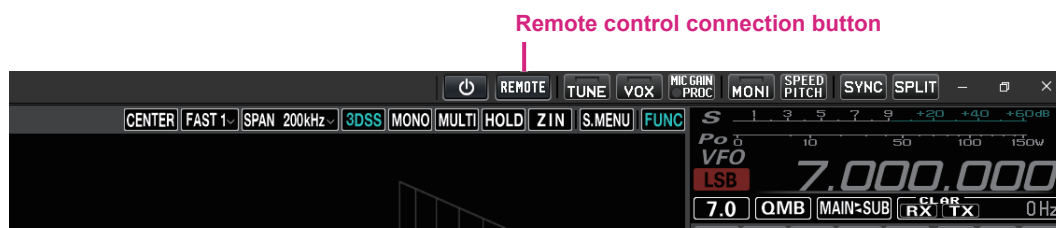

**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver remains ON and only remote control stops.



If the remote control is disconnected due to network instability, etc., you can restart the remote control by clicking the [REMOTE] button.

## • Warning sign

If the warning sign illuminates or occasionally opens, there may be a problem with the network line or port open settings. Refer to the SCU-LAN10 Installation Manual and restart the settings from the beginning. Click the warning sign to see the detected issues.




## Screen layout selection button

---

Screen layout selection button




**Click:** Select a screen layout from 6 types.

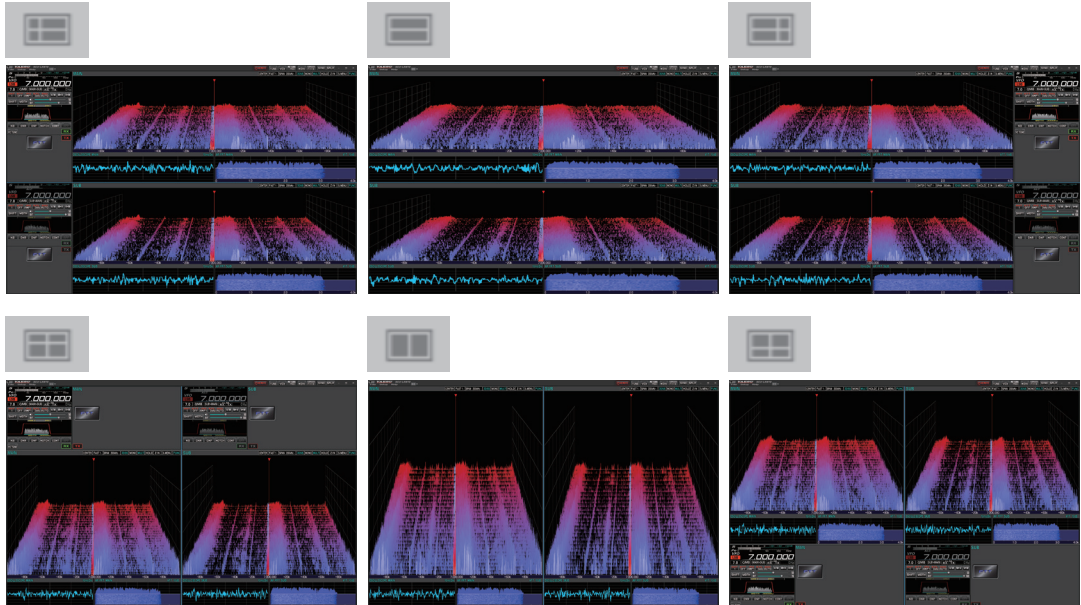

**Click & Hold:** To reset the size of the changed display area on the screen to the default setting.

## Transmission function button

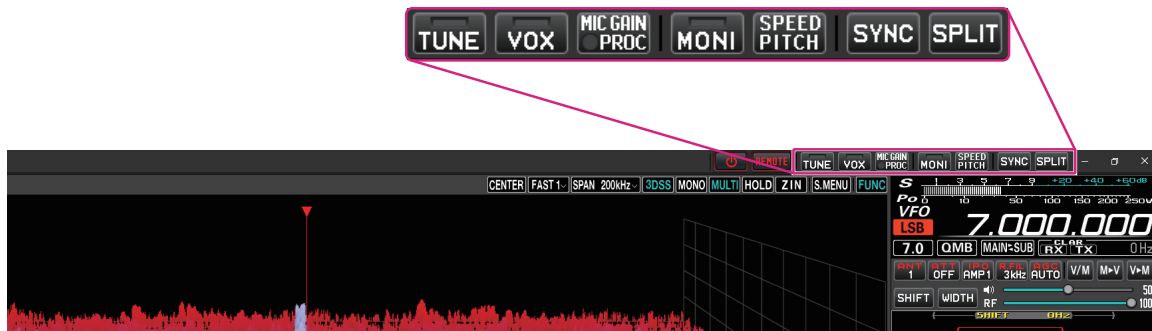

### TUNE button



**Click:** Switches the antenna tuner ON / OFF.  
When ON, the button indicator lights red.


**Click & Hold:** The transceiver will switch to the transmit mode, and automatically start the antenna tuner.

### VOX button



**Click:** Switches VOX ON / OFF.  
When ON, the button indicator lights red.


**Right click:** The VOX settings window opens.

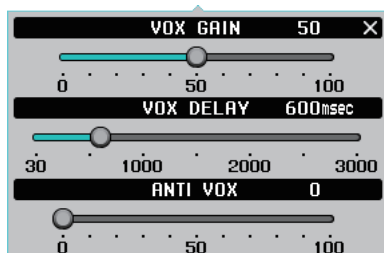

### MIC GAIN/PROC button



**Click:** Switches the PROC ON / OFF. (Only works in LSB / USB modes)  
When ON, the round indicator on the button lights red.

**Right click:** The MIC GAIN / AMC / PROC settings window opens.  
To keep the MIC GAIN / AMC / PROC settings window displayed, click the [Pin Button]  in the upper right of the window.



### MONI button



**Click:** Switches MONITOR ON / OFF.  
When ON, the button indicator lights red.


**Right click:** The MONITOR level settings window opens.



### SPEED/PITCH button



**Click:** The CW SPEED and CW PITCH settings window opens.

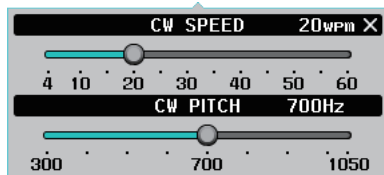

### SYNC button



**Click:** Switches SYNC (synchro function) ON / OFF.  
When ON, the button is displayed in red.

### SPLIT button



**Click:** Switches the SPLIT function ON / OFF.  
When ON, the button is displayed in red.


**Click & Hold:** With the quick split function, the SUB band frequency is set to the frequency of the MAIN band + the offset frequency of the quick split function (default setting: +5 kHz), and the split function is turned ON.

When the split function is ON, the offset frequency (default setting: +5 kHz) is added to the SUB band frequency each time you click and hold.


**Right click:** The setting screen for the offset frequency of the quick split function opens.



## FUNC button (Function menu display)

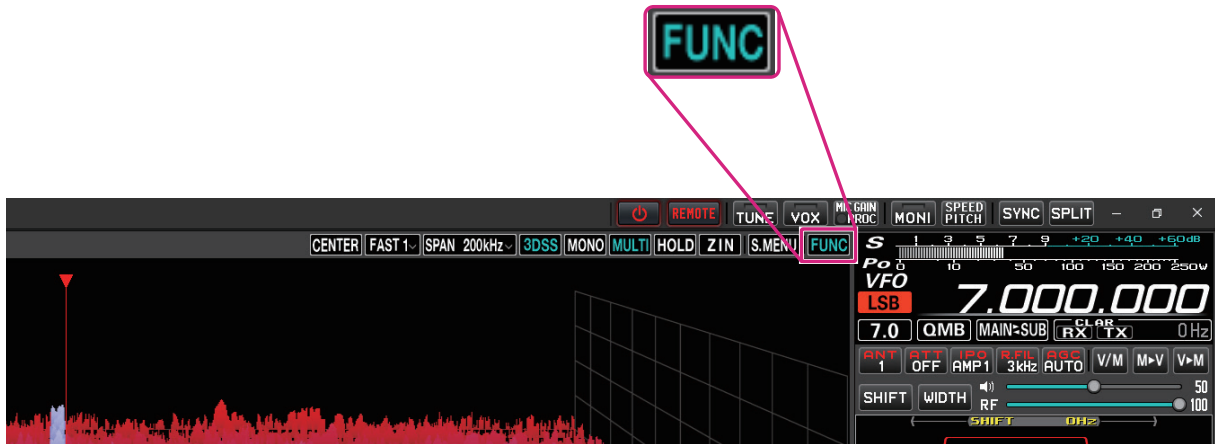




Displays the function menu screen for setting various functions. (Some items are different from the transceiver function menu display.)

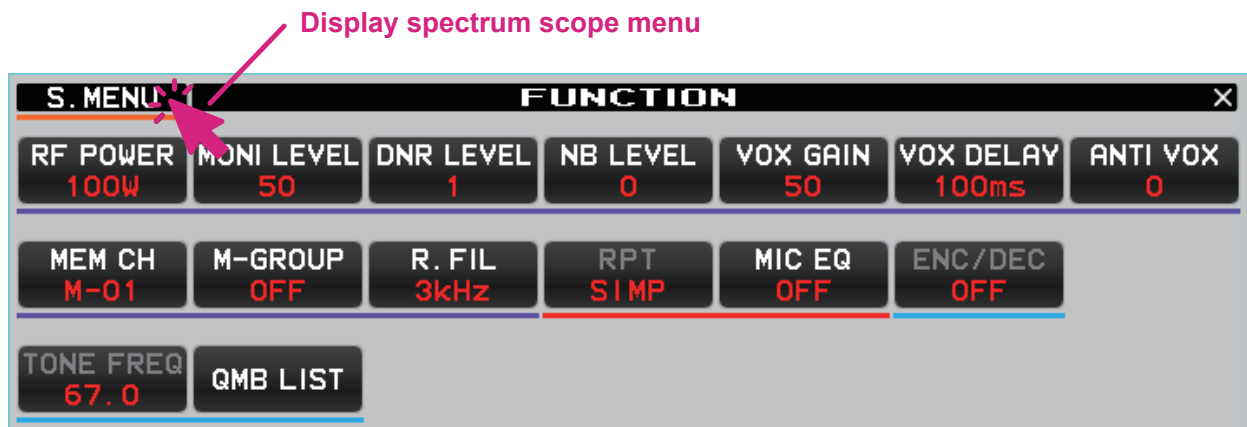

## RF POWER button



Adjust the current transmit frequency (HF / 50MHz band) or communication mode (AM mode) and the transmit output of each.



The maximum transmit power that can be set is less than or equal to the following MAX POWER set in the transceiver set mode.

SET MODE [OPERATION SETTING] → [TX GENERAL]

**HF MAX POWER** (HF)

**50M MAX POWER** (50MHz)

**AM MAX POWER** (AM Mode)

### MONI LEVEL button

MONI LEVEL  
50

Monitor level adjustment



### DNR LEVEL button

DNR LEVEL  
1

Set the Digital Noise Reduction response.



### NB LEVEL button

NB LEVEL  
0

Noise blanker level setting



### VOX GAIN button

VOX GAIN  
50

VOX gain setting



### VOX DELAY button

VOX DELAY  
500ms


The “Hang-Time” of the VOX system (the transmit-receive delay after the cessation of speech) may also be adjusted.



### ANTI VOX button

ANTI VOX  
50

The Anti-Trip setting sets the negative feedback of receiver audio to the microphone, to prevent receiver audio from activating the transmitter



### MEM CH button

Selects the memory channel in memory mode.

MEM CH  
M-01

**Click:** Select memory channels in sequence.

**Wheel:** Select a memory channel.

## M-GROUP button

M-GROUP  
OFF

**Click:** When the memory group function is ON, memory groups are selected in sequence.

**Wheel:** Selects the memory group when the memory group function is ON.

**Right click:** Select ON / OFF of the memory group function.

OFF ON

## R.FIL button

R. FIL  
3kHz

Select the bandwidth of the roofing filter. The bandwidth of the roofing filter that can be selected depends on the communication mode.

300Hz 600Hz 1.2kHz 3kHz 12kHz



- Roofing filters that are not included in the remote control transceiver are not displayed.
- 300Hz & 1.2kHz roofing filters are optional. (300Hz is included on the MAIN side with the FTDX101MP)
- Keyboard shortcuts  
MAIN band: r key  
SUB band: Shift + r key

## RPT button

RPT  
SIMP

Select the shift direction when operating through a repeater.

- SIMP +

**SIMP:** Both transmit and receive have the same frequency.

**+ (plus):** Transmit is at a higher frequency than the receive frequency (default setting is +100kHz).

**- (minus):** Transmit is at a lower frequency than the receive frequency (default setting is -100kHz).

## MIC EQ button

MIC EQ  
OFF



The parameters of the microphone equalizer cannot be set with the remote control.

## ENC/DEC button

ENC/DEC  
OFF

Turn the tone encoder function or tone squelch function ON.

OFF ENC TSQ

## TONE FREQ button

TONE FREQ  
88.5

Set the tone frequency for the tone encoder function and tone squelch function.

67.0 254.1

## QMB LIST button

QMB LIST

You can check or delete the contents stored in the QMB (quick memory bank) of the current frequency band. Also, the number of QMB channels can be selected from 5ch or 10ch.


QMB LIST						X
1	--.---.---	-----	6	--.---.---	-----	10ch
2	--.---.---	-----	7	--.---.---	-----	
3	--.---.---	-----	8	--.---.---	-----	
4	--.---.---	-----	9	--.---.---	-----	
5	--.---.---	-----	10	--.---.---	-----	DELETE



# Spectrum scope area


## Screen operation

### 3DSS display

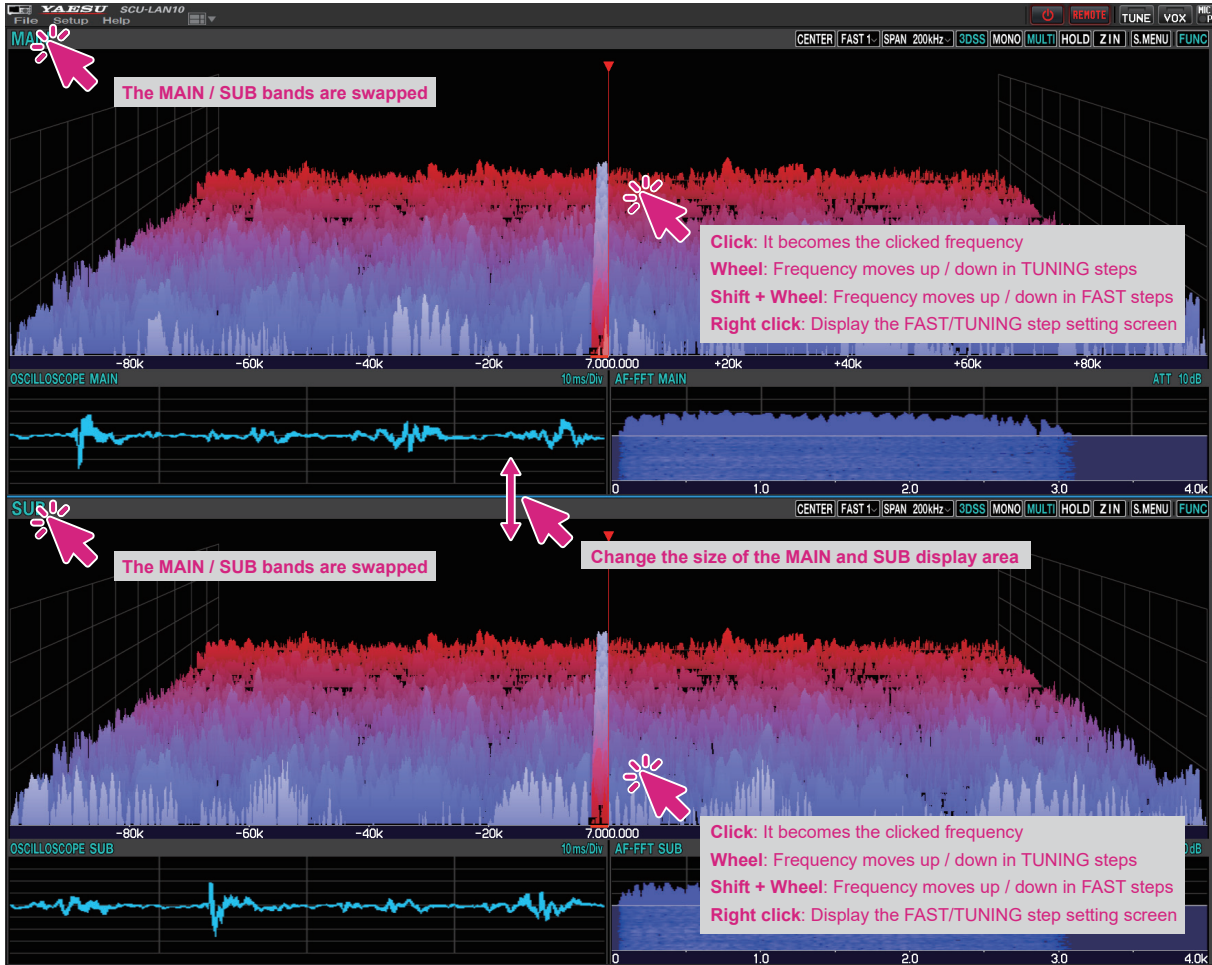

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.

### Water fall display

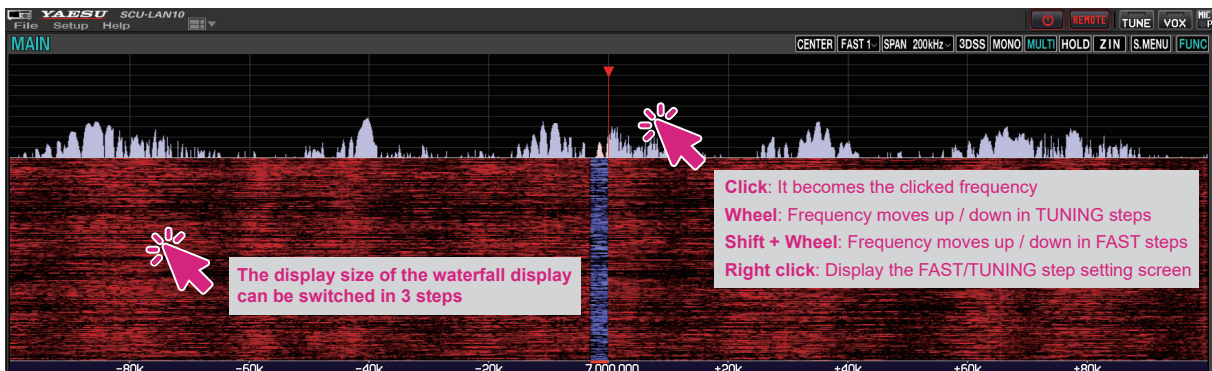

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.

- **Turn the wheel to change the receive frequency**

Turn the **mouse wheel** on the spectrum scope screen to change the frequency in the set “**TUNING**” step. If you turn the **mouse wheel** while pressing the **[SHIFT]** key on the keyboard, the frequency will increase or decrease in “**FAST**” steps.

- **Click to change the receive frequency**

Click on the spectrum scope screen to jump to that frequency. You can then turn the mouse wheel to tune the frequency and hear the desired signal.

- **Right-click to change the steps**

Right-click on the spectrum scope screen to display the setting screen for the FAST step and TUNING step.


- **MAIN / SUB band display switching**



The display positions of the MAIN band and the SUB band will swap each time you click.


- **Change the size of the MAIN / SUB area**

The size\* of the MAIN band and SUB band display area may be changed by dragging the mouse cursor when it changes to “↕”.


\*You can initialize the size by clicking and holding the screen layout icon .

- **Resize the waterfall display area**

While the spectrum scope is in the waterfall display, the size\* of the display area may be changed in 3 steps by clicking the waterfall display.

\*You can initialize the size by clicking and holding the screen layout icon .

## Scope function button

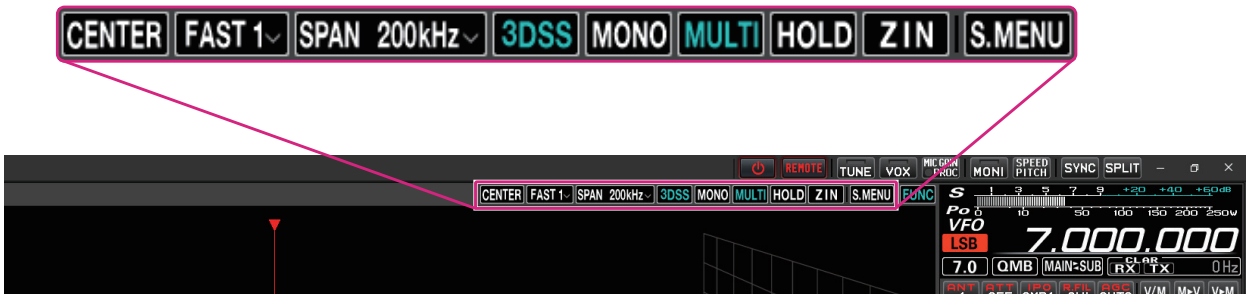

## CENTER / CURSOR / FIX button



Switches the operation of the spectrum scope.

**Click:** The CENTER display, CURSOR display, and FIX display switch each time the button is clicked.

**Click & Hold:**

- If you click and hold the button while in CENTER or CURSOR, the digits below 100 Hz of the receive frequency will be zero.
- If you click and hold the button during FIX, the receive frequency will return to the scope start frequency.

**Right Click:** Right clicking the button during FIX will open a pop-up screen for entering the scope start frequency (left edge).



**Keyboard operation:**

**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**X**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

**SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons**



Switches the scope display speed.

**Click:** A popup screen for selecting the speed of the scope display is displayed.



<b>SLOW1:</b>	sweep speed	Slow
<b>SLOW2:</b>	sweep speed	↑
<b>FAST1:</b>	sweep speed	Normal
<b>FAST2:</b>	sweep speed	↓
<b>FAST3:</b>	sweep speed	Fast



The settings for this feature apply only to the remote-control software.

**SPAN button**



Sets the frequency span (display range) of the scope screen.

**Click:** A popup screen for selecting the span of the scope display is displayed.



Keyboard shortcuts  
 MAIN band: Arrow keys (Left/Right)  
 SUB band: Shift + Arrow keys (Left/Right)

**3DSS button**



Switches between the 3DSS display and the waterfall display.

**Click:** The “3DSS” display and “Waterfall” display switch. When “3DSS” is displayed, the button text is displayed in green.

### MONO (Dual/Mono Switching) button



The scope screen switches to the "MONO" display, which displays only one side of the MAIN band or SUB band.

**Click:** When "MONO" is displayed, the button flashes red.

### MULTI (Multi display switching) button



**Click:** Switches to the "multi display" that displays the oscilloscope screen and AF-FFT screen. When "MULTI" is displayed, the button text is displayed in green.

**Click & Hold:** Clicking and holding the button during "Multi display" will change the display position of the oscilloscope screen and AF-FFT screen.

### HOLD button



Temporarily suspends waveform drawing on both the MAIN / SUB scope screen and the receive filter screen.

**Click:** Switches between pause / cancel.  
The button flashes red and appears during pause.

### ZIN (auto Zero-in) button




While receiving a CW signal in CW mode, it can be automatically adjusted (zero-in) to the frequency of the partner station so that it matches the received PITCH (pitch).

**Click:** If you click while receiving a CW signal, it will automatically zero in.

**S.MENU button (Spectrum scope menu display)**



Displays the scope menu screen to permit settings related to the scope display.

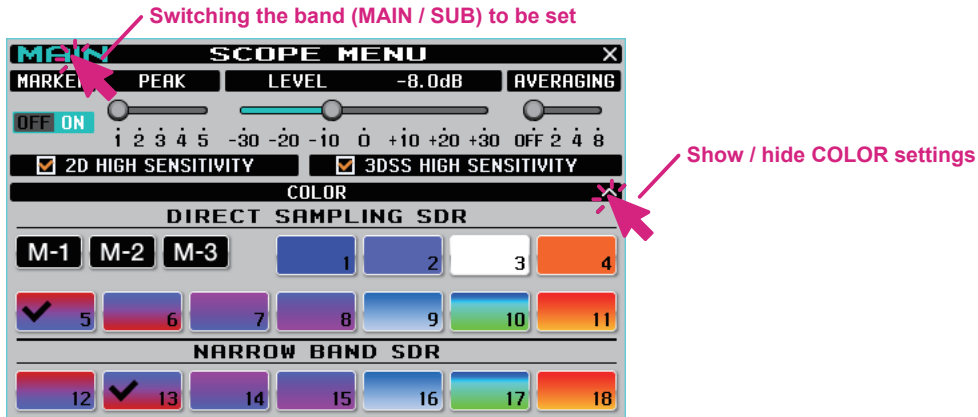


● **MARKER**



Click the button to turn the display of the receive frequency marker (green line) and transmit frequency marker (red line) ON / OFF.

**i** When the operation of the spectrum scope is set to “CENTER”, the center of the scope is always the receive frequency, so the receive frequency marker (green) is not displayed.

● **PEAK**



The color density may be adjusted to the level of the signal.

- LV1: Light
- LV2: ↑
- LV3: Normal
- LV4: ↓
- LV5: Dark


**i** The settings for this feature apply only to the remote-control software.

● **LEVEL**



Adjust the level to make it easier to distinguish between the desired signal and noise.

- **AVERAGING**



Waveforms are averaged and displayed smoothly.

OFF: Do not average

2 to 8: Display averaging ON



- The AVERAGING setting is common to the MAIN band / SUB band spectrum scope screens.
  - This function is available only with the remote-control software.
- 

- **2D HIGH SENSITIVITY**




If a check mark is added, the waterfall display sensitivity will be emphasized.

- **3DSS HIGH SENSITIVITY**



If a check mark is added, the 3DSS display sensitivity will be emphasized.

- **COLOR**

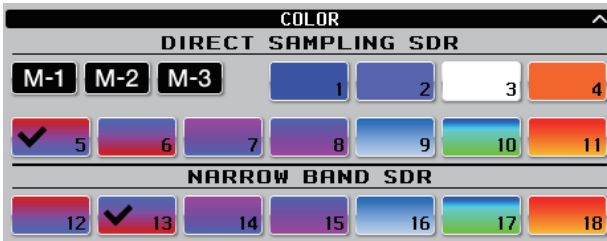

Click the preferred colors to select the display colors for the receive part of the direct sampling SDR and again for the receive part of the narrowband SDR.



The settings for this feature apply only to the remote-control software.

---

- **Display color memory**

You can save the set combination of display colors by clicking and holding the [M-1], [M-2] or [M-3] button. The settings can be recalled by clicking the [M-1], [M-2] or [M-3] button.


Default settings: M-1: COLOR-5, COLOR-13

M-2: COLOR-9, COLOR-17

M-3: COLOR-1, COLOR-18

# Oscilloscope / AF-FFT area

## Screen operation

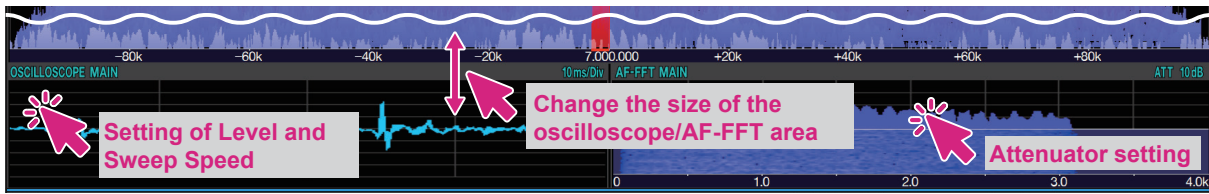


- **Resize oscilloscope / AF-FFT area**

The size\* of the oscilloscope / AF-FFT display area can be reduced by dragging the title bar at the top of the oscilloscope / AF-FFT area.

\*Click and hold the screen layout icon  at the top of the screen to initialize the size.

- **Click to set the level and sweep speed of the oscilloscope**

Click in the oscilloscope display area to set the waveform display level and time axis scale.



The level settings and sweep speed settings are common to the MAIN & SUB band oscilloscope screens.

- **Attenuator setting (AF-FFT)**


You can set the attenuator by clicking inside the AF-FFT display area.



The attenuator settings are common to the MAIN band & SUB band AF-FFT screen.

- **Change the display position**

You can change the display position of the oscilloscope screen and AF-FFT screen by clicking and holding the [MULTI] button during "Multi display".

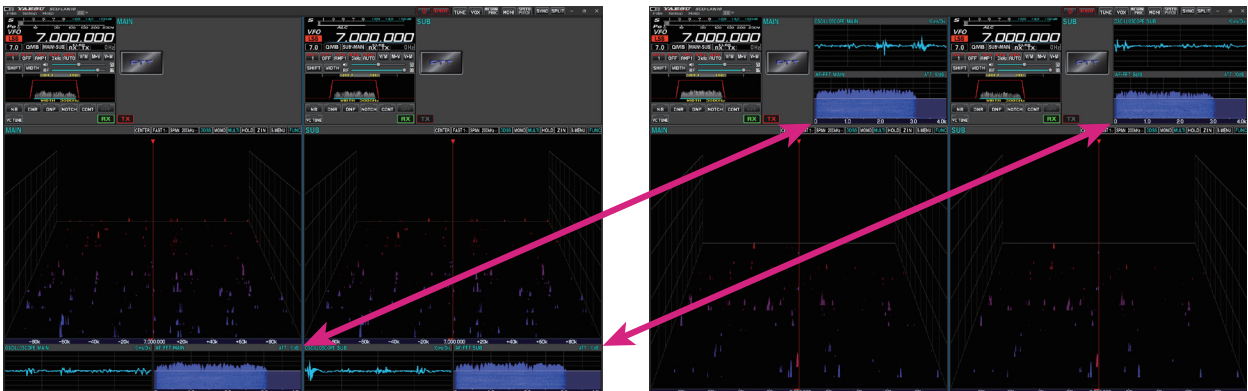


## MAIN band / SUB band operation area

---



## Meter operation selection during transmit

---

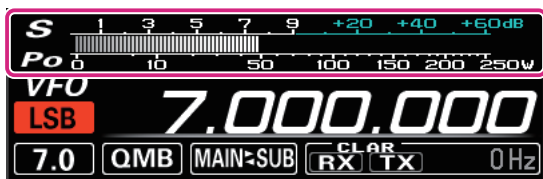

Click: To select the meter operation during transmit:




- PO: Transmission output display
- ALC: ALC voltage display
- SWR: Antenna SWR display
- COMP: AMC gain control display  
(Compression level display when the speech processor is operating)
- ID: Final stage FET Drain current display
- VDD: Final stage FET Drain voltage display
- TEMP: Final FET temperature display



## Selecting the memory channel


---

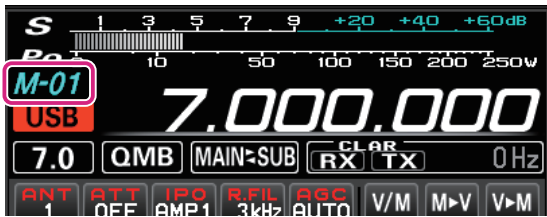

**Wheel:** Select the memory channel during a memory channel recall.

## Selecting the QMB channel

---

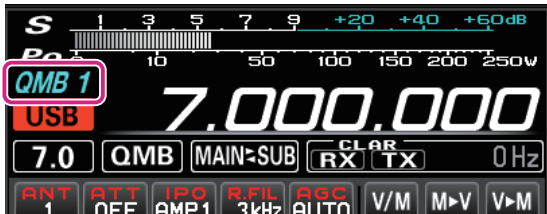


**Wheel:** Select the QMB channel during a QMB channel recall.



Keyboard shortcuts  
MAIN band: q key  
SUB band: Shift + q key

## Selecting the operating mode

---

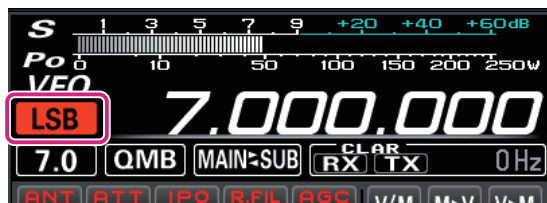

**Click:** Select the operating mode.



**Right Click:** Switch between the following modes with one touch.

**LSB ↔ USB**  
**CW-L ↔ CW-U**  
**AM ↔ AM-N**  
**FM ↔ FM-N**  
**DATA-L ↔ DATA-U**  
**DATA-FM ↔ D-FM-N**  
**RTTY-L ↔ RTTY-U**




Keyboard shortcuts  
LSB/USB: F1 key (MAIN band), Shift + F1 key (SUB band)  
CW-L/CW-U: F2 key (MAIN band), Shift + F2 key (SUB band)  
AM: F3 key (MAIN band), Shift + F3 key (SUB band)  
FM: F4 key (MAIN band), Shift + F4 key (SUB band)

## Frequency change operation

---

### Switch frequency band


Click the MHz digit or band icon to display the band selection screen.

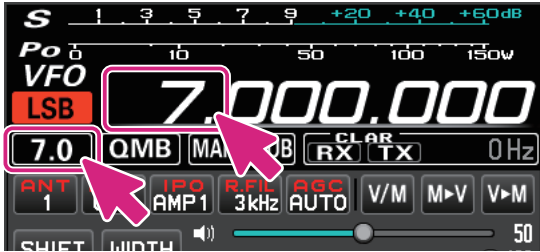

Click: Band selection



### MHz digit

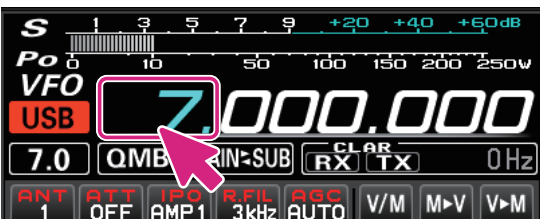


Wheel: Move frequency Up / down at 1MHz

Click: Band selection



Right Click: The numeric keypad screen pops up and you can enter the frequency. You can also click with the mouse, or enter with the number keys on your computer keyboard.



Keyboard operation:


**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**⌫**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

## kHz digit

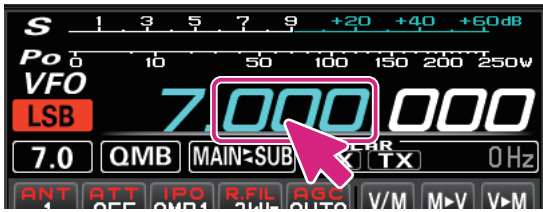


- Wheel:** Frequency moves up/down in FAST steps
- Click:** Click the upper half / lower half of the number move the frequency up/down in FAST steps
- Drag up and down:** Frequency changes up / down in FAST step
- Right Click:** Display the setting screen of FAST step / TUNING step



By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.

## Hz digit

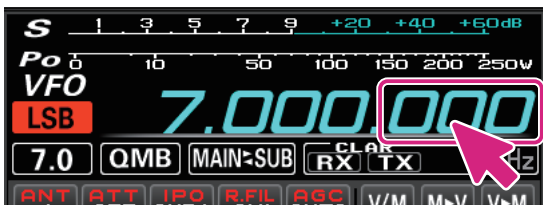


- Wheel:** Frequency goes up / down in TUNING step
- Click:** Click the upper half / lower half of the number to frequency goes up / down the frequency in TUNING steps
- Drag up and down:** Frequency continuously increases / decreases in TUNING steps
- Right Click:** Displays the FAST step / TUNING step setting screen



- In the frequency display, turning the wheel while pressing the [SHIFT] key on the keyboard does not result in the FAST step.
- By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.
- Keyboard shortcuts
  - MAIN band: Page Up / Page Down keys
  - SUB band: Shift + Page Up / Page Down keys

## QMB Operation

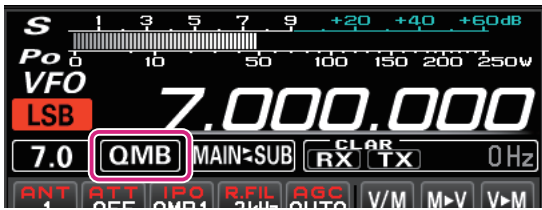

**Click:** Recalls the information stored in QMB in order.



- You can select a QMB channel by turning the wheel while hovering the mouse over the QMB channel number display while recalling QMB.
- Keyboard shortcuts  
 MAIN band: q key  
 SUB band: Shift + q key

**Click & Hold:** Stores up to 5 or 10 channels of the current operating status in a dedicated memory channel (QMB: Quick Memory Bank).


**Right Click:** A list of QMB memories will be displayed.

QMB LIST						
1	--.---.---	-----	6	--.---.---	-----	10ch
2	--.---.---	-----	7	--.---.---	-----	
3	--.---.---	-----	8	--.---.---	-----	
4	--.---.---	-----	9	--.---.---	-----	
5	--.---.---	-----	10	--.---.---	-----	DELETE

Click the QMB channels you want to delete and click the [DELETE] button to delete them.


Click the [5ch] or [10ch] button to switch the number of QMB channels.

## MAIN<=>SUB / SUB<=>MAIN operation

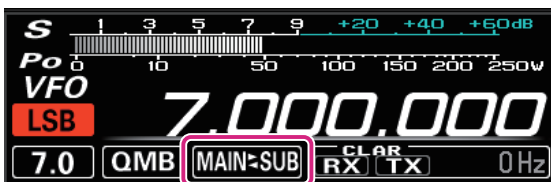

**Click:** The frequency data of MAIN band and SUB band are exchanged.

## CLAR (Clarifier) operation

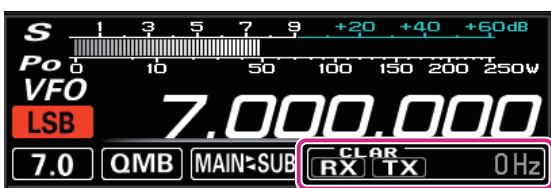


**Click:** Click the [RX] or [TX] button to turn the RX clarifier or TX clarifier ON.

**Wheel:** When the mouse wheel is rotated on the display of the offset amount (difference between reception frequency and transmission frequency), the offset amount changes in 10Hz or 100Hz steps (AM / FM / DATA-FM / D-FM-N).

**Click & Hold:** Click and hold the [RX] or [TX] button to clear the offset amount.

## Receiver setting operation

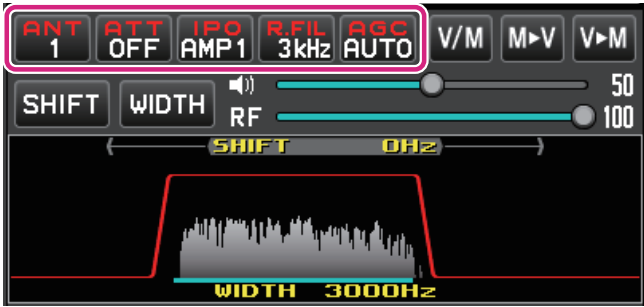

### ANT (Switching the Antenna) button



The currently used antenna jack number (“ANT 1”, “ANT 2”, “ANT 3/RX”) is displayed.

**Click:** Select the antenna terminal.



### ATT (Attenuator) button



Displays the current ATT (Amount of receive input signal attenuation).

**Click:** Select the attenuation level.



### IPO (Intercept Point Optimization) button



Displays the current IPO (Intercept Point Optimization). can establish the gain of the RF amplifier section to accommodate the connected antenna and the received signal conditions.

**Click:** Select from IPO, AMP1 (Approximately 10 dB gain) and AMP2 (Approximately 20 dB gain).



### R.FIL (Roofing Filter Switching) button



Displays the bandwidth of the currently selected roofing filter.

**Click:** Switches the crystal roofing filters of 300Hz, 600Hz, 1.2kHz, 3kHz, and 12 kHz that are installed in this transceiver.



- Roofing filters that are not included in the remote control transceiver are not displayed.
- 300Hz & 1.2kHz roofing filters are optional. (300Hz is included on the MAIN side with the FTDX101MP)
- Keyboard shortcuts  
MAIN band: r key  
SUB band: Shift + r key

## AGC (Automatic Gain Control) button



Displays the currently selected AGC setting. The AGC system is designed to help compensate for fading and other propagation effects.

**Click:** Select from OFF, AUTO, FAST, MID and SLOW. The “AUTO” selection mode selects the optimum receiver-recovery time for the reception mode.



## Memory channel operation



### V/M button



When the memory channel list is not displayed:

**Click:** The VFO and the last used memory channel will be recalled alternately.

**Click & Hold:** Open the memory channel list.

When the memory channel list is displayed:

**Click:** Close the memory channel list.

### M>V button



When the memory channel list is not displayed:

**Click:** Open the memory channel list.

When the memory channel list is displayed:

**Click:** The data saved in the memory channel selected in the memory channel list will be transferred to the VFO, and the memory channel list will close.

### V>M button



When the memory channel list is not displayed:

**Click:** Open the memory channel list.

**Click & Hold:** The VFO data will be written to the memory channel that was last called / written.





When the memory channel list is displayed:






**Click:** Close the memory channel list.

**Click & Hold:** The VFO data will be written to the memory channel selected in the memory channel list.

## Memory channel list operation

CH	FREQ	MODE	NAME	SCAN MEMORY	DISPLAY TYPE
M-01	7.000.000	LSB		SCAN	FREQ
M-02	7.000.000	LSB		SCAN	FREQ
M-03	14.000.000	LSB		SCAN	FREQ
M-04	--.---.---	-----	-----	----	----
M-05	--.---.---	-----	-----	----	----
M-06	--.---.---	-----	-----	----	----



The window can be expanded to increase the number of channels displayed by dragging the bottom border of the memory channel list screen.

### Read memory data from radio



The data of all memory channels stored in the transceiver can be read into the remote-control software.



When memory data is read from the transceiver, the memory data currently set in the remote-control software will be overwritten.



If the memory data currently held by the remote-control software is written to a different model transceiver, the transferred initial values may not match the different model. Be very careful when writing data to other models.

**Click:** A confirmation screen is displayed. Click [YES] to load.

**Right click:** Displays the date and time when the memory data was last read.

### Transfer memory data to transceiver



The data of all memory channels stored in the remote-control software can be transferred to the transceiver.



In the remote-control software, in addition to the memory data stored in the transceiver, the remote-control software has memory data independently.



When reading data from a different model transceiver than the memory data currently held by the remote-control software, all the data stored in the memory channels, including the model-dependent data, is transferred and overwritten. Please be careful when reading data from other models.

**Click:** A confirmation screen is displayed. Click [YES] to transfer.

**Right click:** Displays the date and time when the memory data was last transferred.

### Recall memory channel



**Click:** Recall the data of the selected memory channel in the MAIN band or SUB band.

### Move memory data to VFO



**Click:** Transfers the data of the selected memory channel to the MAIN band or SUB band.

## Write to memory



**Click:** Writes information such as the MAIN band or SUB band frequency and operation mode to the selected memory channel.

## Erase / Resume Memory Channel




**Click:** Erases or restores the selected memory channel.

**Right click:** A confirmation screen is displayed. Click [YES] to initialize all memory information.



Memory channel "M-01" cannot be erased.

## Editing memory channels

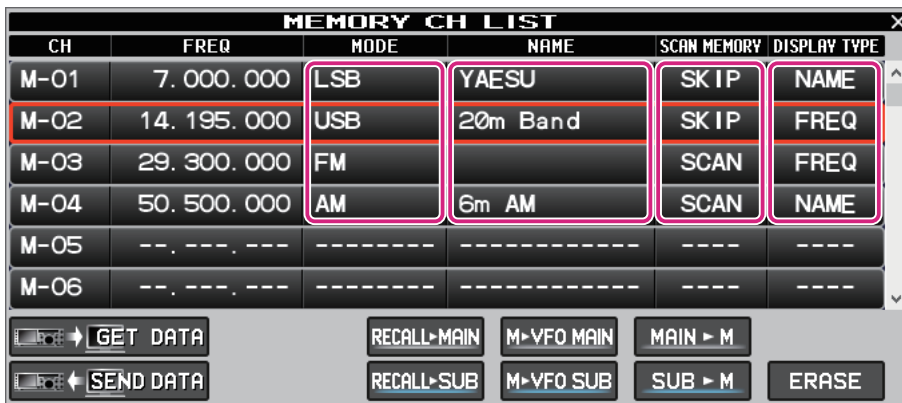

You can edit the contents of the memory channel by right-clicking the MODE, NAME, SCAN MEMORY, and DISPLAY TYPE fields.

### ● MODE

Select the operation mode.



### ● NAME

Edit the alpha tag (maximum 12 characters) of the memory channel.

### ● SCAN MEMORY

When scanning the memory, set the channels you do not want to scan to "SKIP".



### ● DISPLAY TYPE


Set the display when the memory is called to "frequency display" or "alpha tag display".





## AF Gain / RF Gain adjustment

---

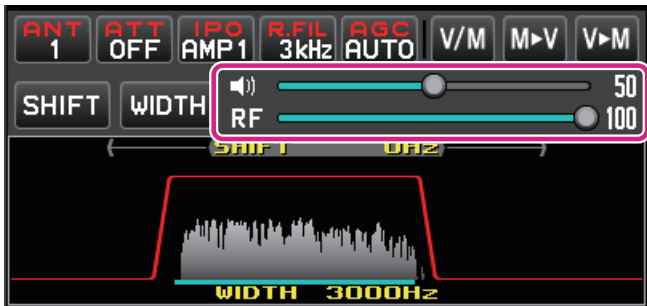

### AF (Speaker icon)

Turn the mouse wheel over the slide bar or drag or click to adjust the receive volume.



Each time you click the speaker icon, MUTE & MUTE cancel will switch.

### RF (RF GAIN) / SQL


Turn the mouse wheel over the slide bar or drag or click to adjust the RF gain.



Right-click on RF to select whether to adjust RF gain or SQL level.

## SHIFT/WIDTH operation

---

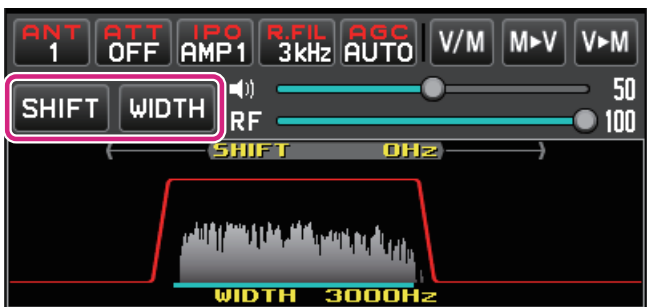

### SHIFT button



**Click:** When the button is blue, the IF filter shift frequency can be changed by operating the mouse in the filter function display area.



Keyboard shortcuts  
MAIN band: s key  
SUB band: Shift + s key

**Click & Hold:** The IF filter shift frequency returns to 0 Hz.



When the radio wave format cannot be shifted, the button is grayed out.

## WIDTH button



**Click:** When the button is blue, you can change the IF filter bandwidth by operating the mouse in the filter function display area.



Keyboard shortcuts  
MAIN band: w key  
SUB band: Shift + w key

**Click & Hold:** The IF filter bandwidth returns to the initial value.



The button is grayed out for radio wave formats where the bandwidth cannot be changed.

## Operation of the filter function display area



**Right Click:** You can select to show / hide the spectrum display of the signal in the filter function display area.



## Interference Reduction Systems operation




## NB (Noise blanker) button



**Click:** The noise blanker function turns ON / OFF.

**Right click:** The operation setting of the noise blanker function can be changed.

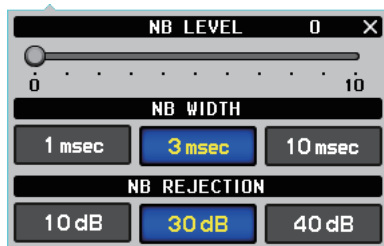

### DNR (Digital Noise Reduction) button



- Click:** The digital noise reduction function turns ON / OFF.
- Right click:** You can set the level of the digital noise reduction function.



### DNF (Digital NOTCH Filter) button




- Click:** The digital NOTCH filter function turns ON / OFF.

### NOTCH (IF NOTCH Filter) button



- Click:** The IF NOTCH filter function turns ON / OFF.




- Right click:** The bandwidth of the IF NOTCH filter function can be selected.




### CONT (Contour) button




- Click:** The Contour function turns ON / OFF.



- Right click:** The attenuation and bandwidth of the contour function can be set.

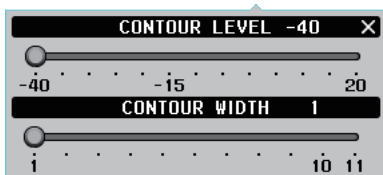

### APF (Audio Peak Filter) button




- Click:** The APF function turns ON / OFF.
- Right click:** The bandwidth of the APF function can be set.



## VC TUNE operation

---

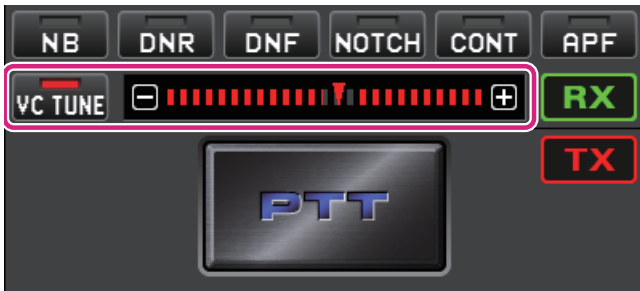

### VC TUNE button



**Click:** The VC TUNE function turns ON / OFF.



When the VC TUNE function is on, the center meter of the tuning point is grayed out at frequencies that cannot be used.

**Click & Hold:** When the tuning point is finely adjusted by the following operation, it automatically returns to the optimum tuning point.

- **Fine-tune the tuning points**

Fine adjustments can be made by clicking or on the VC tune bar graph or operating the mouse wheel. Also, you can click the bar graph to adjust with a slightly larger amount of change.

## RX/TX buttons operation

---



### RX button



When clicked and grayed out, the receive audio of the band is muted. Click again to unmute.



Even when the audio is muted, the spectrum of the spectrum scope and the signal spectrum in the filter function display area are visible.

### TX button



Each time you click the TX button, the transmit band switches between the MAIN band and SUB band.

## PTT operation


---



## PTT

**Click & Hold:** To transmit


---




**Right click:** To switch the button function between "PTT" and "MOX".



## MENU bar

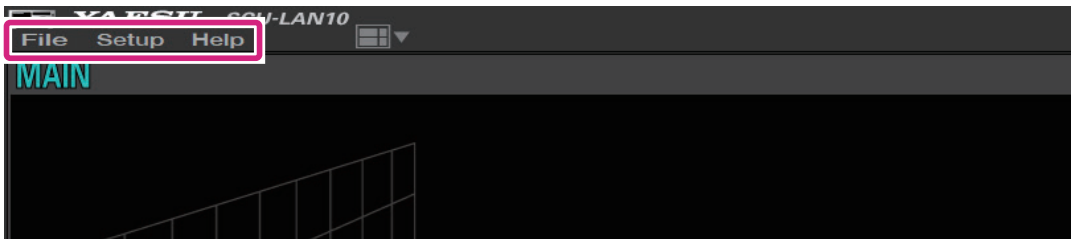


## File

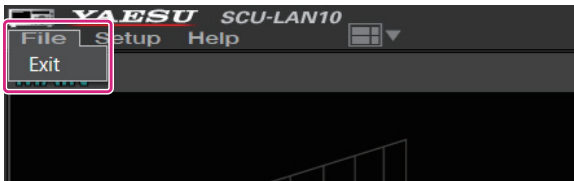


**Exit:** Closes the remote-control software.

## Setup

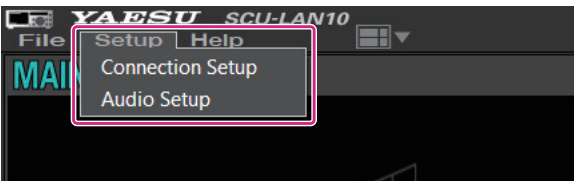


**Connection Setup:** Make settings related to connection with SCU-LAN10.  
There is no need to change it if you have set it once at the beginning.

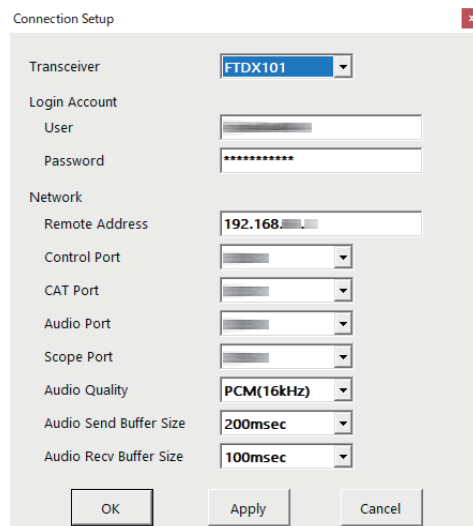

While remotely connected to the SCU-LAN10, it is grayed out and you can only check the settings.

For details, refer to the SCU-LAN10 Installation Manual.

**Audio Setup:** Opens the audio level settings screen.

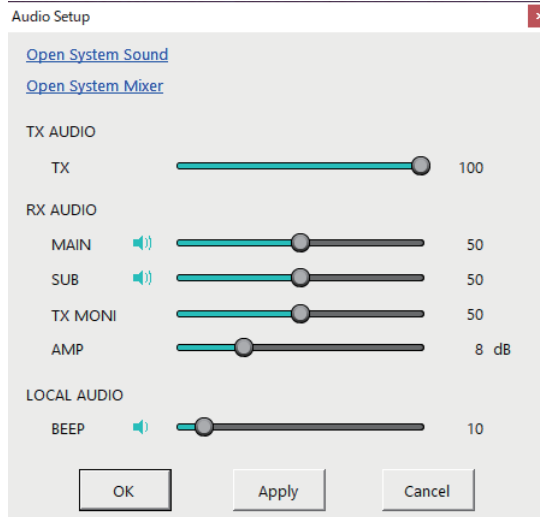

**Open System Sound**  
**Open System Mixer**

The Windows “**Sound**” screen appears.



The Windows “**Volume Mixer**” screen appears.

For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual.

**TX AUDIO**

**TX**


Adjust the transmit modulation level.

This adjustment is the same as adjusting the MIC GAIN adjustment bar  that appears when you right-click the MIC GAIN / PROC button .

**RX AUDIO**


**MAIN**

Adjusts the receive volume of the MAIN band.

This adjustment is the same as adjusting the volume control bar  on the MAIN band operation block.

**SUB**

Adjusts the receive volume of the SUB band.

This adjustment is the same as adjusting the volume control bar  on the SUB band operation block.

**TX MONI**

Adjusts the volume of the transmitted audio that is monitored by the monitor function.

This adjustment is the same as the MONI adjustment bar  that appears when you right-click the  button.

**AMP**

Adjust this when the receive audio of the MAIN / SUB band or the TX MONI volume is extremely low or distorted even when the Windows volume adjustment or the above volume adjustment is performed. Normally you do not need to change. (Factory setting: 8 dB)

**LOCAL AUDIO**


**BEEP**

Adjusts the beep volume when operating the remote-control software.



If the volume is extremely low even if you adjust it on the “Audio Setup” screen, or if the sound is too loud and distorted, use Windows to adjust the volume. For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual. If you are still unable to make adjustments, change the RX AUDIO “AMP” setting above.

## Help

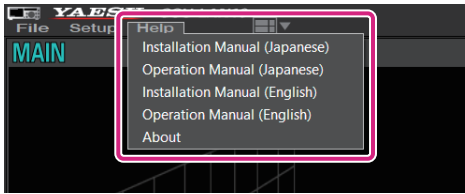

- Installation Manual (Japanese):** Open the Installation Manual (Japanese)  
**Operation Manual (Japanese):** Open the Operation Manual (Japanese)  
**Installation Manual (English):** Open the Installation Manual (English)  
**Operation Manual (English):** Open the Operation Manual (English) (This Manual)

**About:** Displays information about this software.

## Shortcut keys

The functions in the table below can be operated with the keys on the PC keyboard.

Function	Shortcut	
	MAIN band	SUB band
<b>Spectrum scope span (wide)</b>	Cursor key Right (→)	Shift + Cursor key Right (→)
<b>Spectrum scope span (narrow)</b>	Cursor key Left (←)	Shift + Cursor key Left (←)
<b>VFO frequency Up</b>	Page Up key	Shift + Page Up key
<b>VFO frequency Down</b>	Page Down key	Shift + Page Down key
<b>AF GAIN Up</b>	Cursor key Up (↑)	Shift + Cursor key Up (↑)
<b>AF GAIN Down</b>	Cursor key Down (↓)	Shift + Cursor key Down (↓)
<b>SHIFT function select</b>	s key	Shift + s key
<b>WIDTH function select</b>	w key	Shift + w key
<b>Roofing filter select</b>	r key	Shift + r key
<b>NOTCH function select</b>	n key	Shift + n key
<b>CONTOUR function select</b>	c key	Shift + c key
<b>Mode select (LSB / USB)</b>	F1 key	Shift + F1 key
<b>Mode select (CW-L / CW-U)</b>	F2 key	Shift + F2 key
<b>Mode select (AM)</b>	F3 key	Shift + F3 key
<b>Mode select (FM)</b>	F4 key	Shift + F4 key
<b>QMB recall</b>	q key	Shift + q key
<b>PTT (Transmission)</b>	Space key	



# Basic Operation (FTDX10)


## Starting the SCU-LAN10 Remote Software

1. Click the Windows **Start** button, and then click the [YAESU SCU-LAN10] icon in the “Yaesu Musen” group to start the remote-control software.




- You can also double-click the [YAESU SCU-LAN10] icon on the desktop to start the remotecontrol software.
- If the transceiver (FTDX10) to be used is not set to “**Connection Setup**” of the “**Setup**” menu on the upper left of the screen, some functions and the screen display will not work properly. For details on the settings, refer to “**SCU-LAN10 Installation Manual**”.
- When connecting to the SCU-LAN10 for the first time, the “**Connection Setup**” screen will be displayed automatically. Set it by referring to the “**SCU-LAN10 Installation Manual**”.

2. Click the [  ] button.

The “  ” button and the “**REMOTE**” button turns red during remote control.



- The [REMOTE] button starts or stops the remote control. Click the [REMOTE] button to turn it ON automatically when the transceiver is turned OFF. If the remote control is disconnected due to network instability, you can restart it by clicking the [REMOTE] button.
- When using the remote-control software for the first time, a warning screen of Windows or firewall software may appear. In this case, set it to allow (unblock) Internet access from the remote-control software.

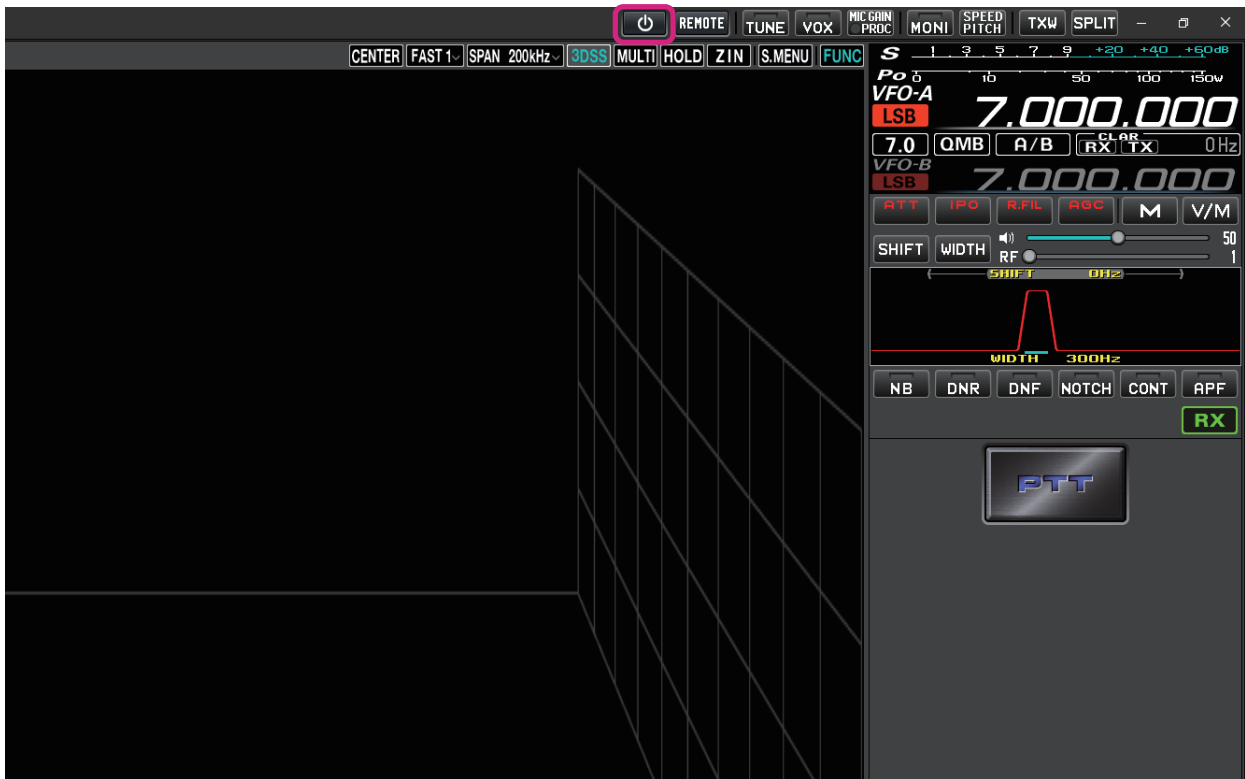


## Remote control software screen


By default, the MAIN band is displayed on the upper area of the screen, the SUB band is displayed on the lower area, the spectrum scope is displayed on the left side of the screen, and the frequency and meter are displayed on the right side.



- The size and layout of each area will be adjusted automatically depending on the screen resolution of your computer, so the display may differ slightly from the example below.
- In the display example below, the **[MULTI]** button is may be clicked to display the oscilloscope and the AF-FFT.

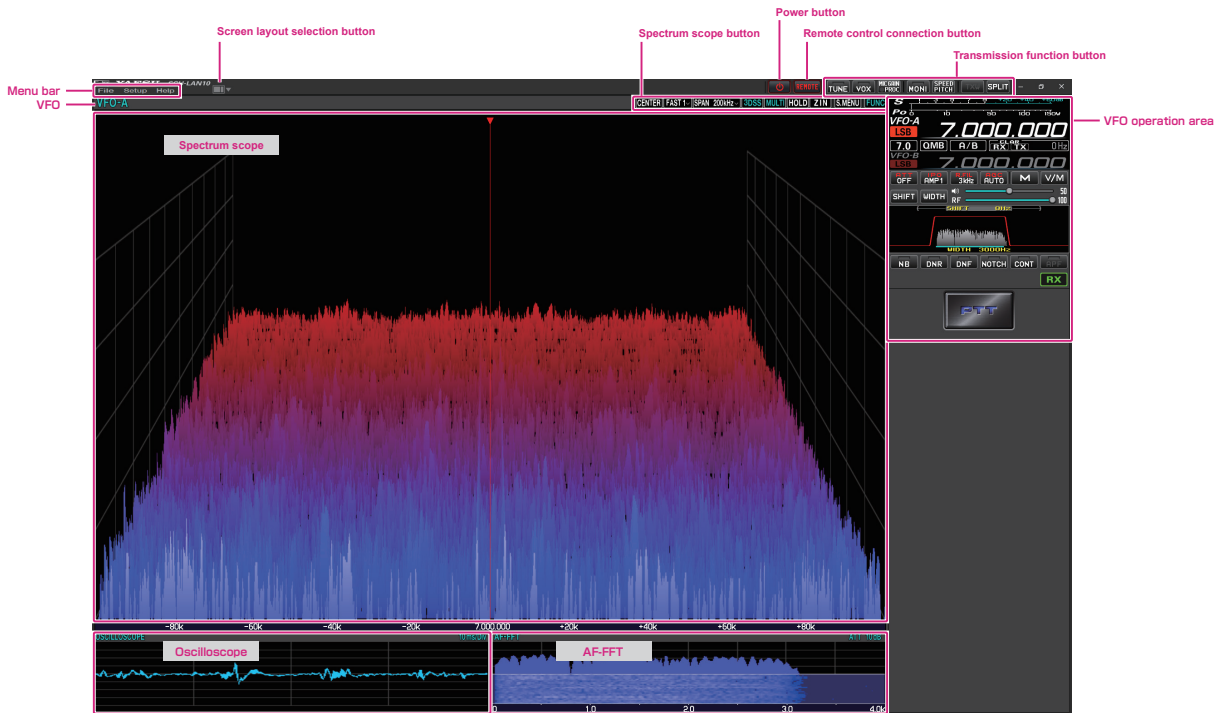

## Select screen layout

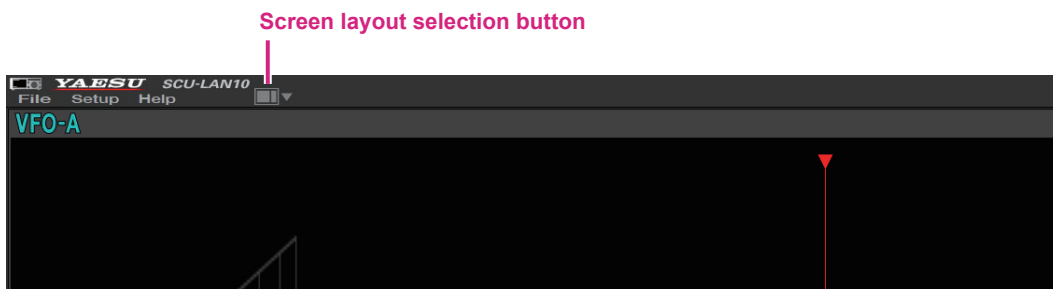


**Click:** Select the screen layout from 5 types.



**Click & Hold:** Returns the size of each area on the screen to the default settings.

## Adjusting the receiver volume

### AF GAIN (Speaker icon)

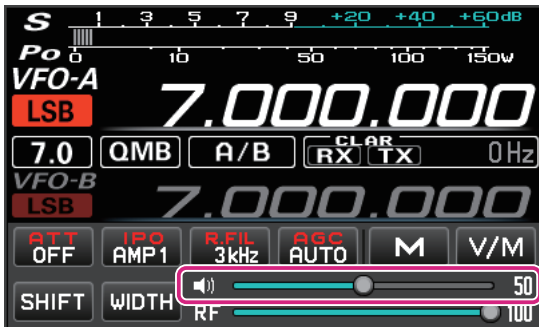

Turn the **mouse wheel**, or drag or click on the slide bar to adjust the receive audio to a comfortable volume.




- Each time you click the speaker icon, mute & mute cancel are switched.
- Keyboard shortcuts  
Arrow keys (Up/Down)

## Change frequency

### Switch frequency band

1. Click the MHz digit or the Band icon to display the band selection screen.

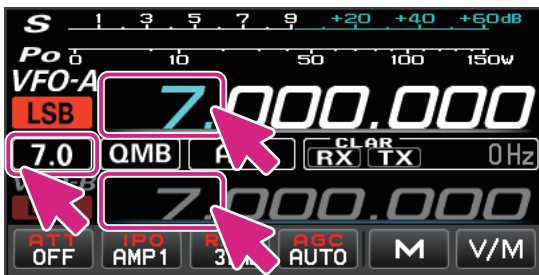

2. Click the desired band.




## Change frequency

There are three ways to change the frequency:

### (1) Mouse wheel operation and drag operation

#### • MHz digit


1. When you mouse over the MHz digit of the frequency, the number turns green.

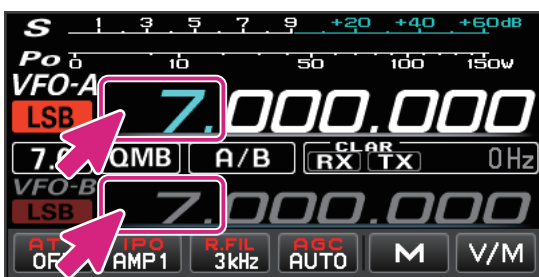

2. In this state, turning the mouse wheel will change the frequency in 1MHz steps.

● kHz digit

1. When you mouseover the 3 digits of the frequency from 100kHz to 1kHz, the digits higher than 1kHz turn green.

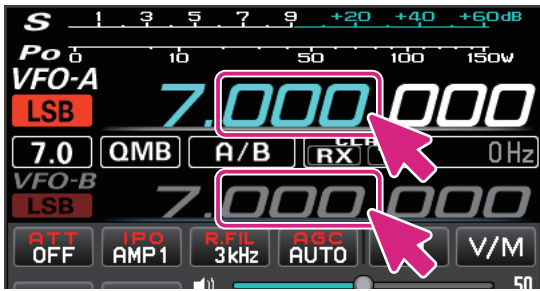


2. In this state, turning the mouse wheel will change the frequency in the set “FAST” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “FAST” step.
  - If you move the mouse up or down while clicking the number, the frequency will change continuously with the set “FAST” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “Changing the tuning step” on the next page.



By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.

● Hz digit

1. When you mouseover the 3 digits of the frequency from 100Hz to 1Hz, all the digits of the frequency change to green.

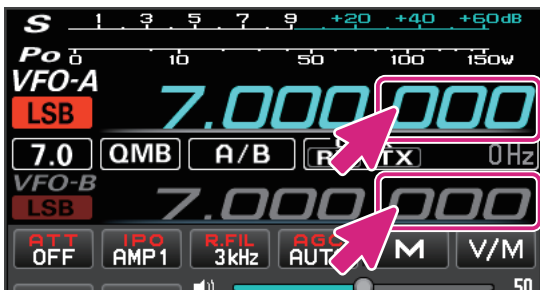


2. In this state, turning the mouse wheel will change the frequency in the set “TUNING” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “TUNING” steps.
  - If you click the number and then move the mouse up or down, the frequency will change continuously at the “TUNING” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “Changing the tuning step” on the next page.



- By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.
- Turning the wheel while holding down the [SHIFT] key on the keyboard does not change the TUNING step to the FAST step.
- Keyboard shortcuts
  - Current VFO: Page UP key/Page Down key
  - Opposite VFO: Shift + Page UP key/Shift + Page Down key


- **Change the frequency step**

1. Right-click on the digit from 100kHz to 1Hz of the frequency to display the setting screen for the FAST step and TUNING step.
2. Click on the desired FAST step or TUNING step.

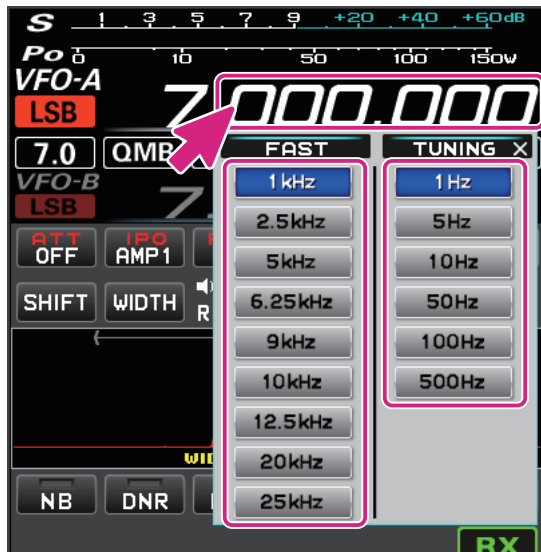

**(2) Change the frequency on the spectrum scope screen**

1. Move the mouse cursor to the display area of the spectrum scope and turn the mouse wheel to change the frequency in the set "TUNING" step.
  - In the Spectrum Scope screen, press and hold the [SHIFT] key on the keyboard and turn the mouse wheel to increase or decrease the frequency in the set FAST steps.
  - When you click on the point you want to receive such as the peak of the signal on the spectrum scope screen, the frequency jumps to the vicinity. You can then turn the mouse wheel to fine tune the frequency and hear the desired signal.

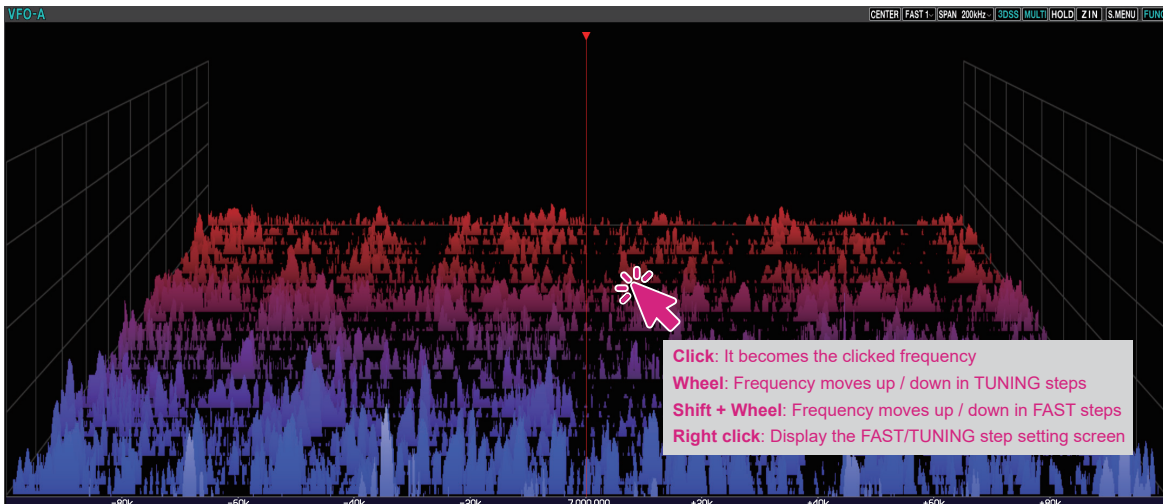


### (3) Enter the frequency on the numeric keypad screen

1. Right-click on the MHz digit of the frequency to display the numeric keypad screen.



2. You can enter the frequency by clicking on the screen or using the keys on your computer.



#### Keyboard operation:

**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**⌫**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

#### ● Select mode

1. Click the mode icon.



2. Click on the desired mode.



- You can right-click the mode icon to switch between the following modes with one touch:  
**LSB↔USB; CW-L↔CW-U; AM↔AM-N; FM↔FM-N; DATA-L↔DATA-U; DATA-FM↔D-FM-N; RTTY-L↔RTTY-U**



- Keyboard shortcuts  
LSB / USB: F1 key  
CW-L / CW-U: F2 key  
AM: F3 key  
FM: F4 key

## Meter operation selection during transmit

---

1. Click on the S/Power meter.



2. Click on the desired meter function.




## Transmitting

---

1. While clicking and holding the **PTT** button, the transceiver will be in transmit status.  
The TX icon is displayed above the frequency during transmission.



 Keyboard shortcuts  
Space key

---

2. Speak into the microphone of the computer.
3. Release the PTT button to return to receive.

### ● Change to the MOX button

Change the PTT button to the MOX button.


1. Right-click the PTT button to display the “PTT” and “MOX” setting screens.



2. Click MOX.


# On Screen Functions & Controls (FTDX10)

## Power button

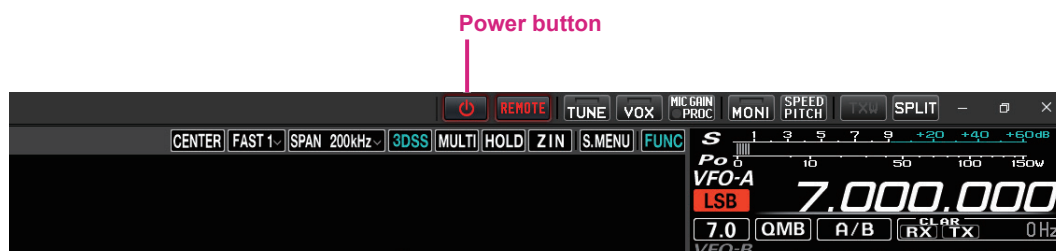

**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver automatically turns OFF and remote control stops.

## Remote button

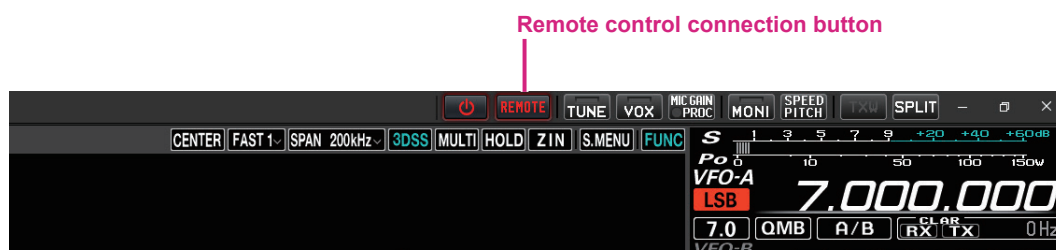


**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver remains ON and only remote control stops.



If the remote control is disconnected due to network instability, etc., you can restart the remote control by clicking the [REMOTE] button.

### • Warning sign

If the warning sign illuminates or occasionally opens, there may be a problem with the network line or port open settings. Refer to the SCU-LAN10 Installation Manual and restart the settings from the beginning. Click the warning sign to see the detected issues.

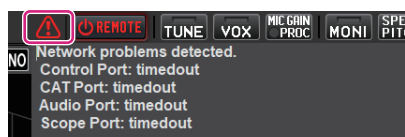



## Screen layout selection button






---

Screen layout selection button




Click:

Select a screen layout from 5 types.

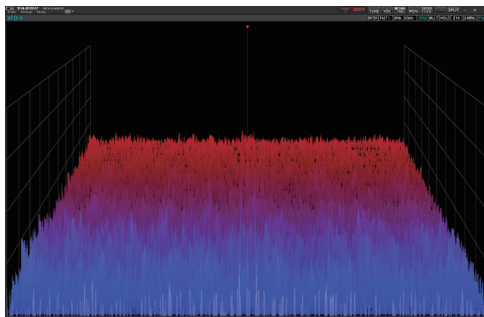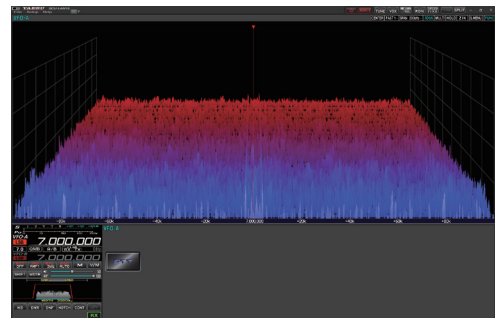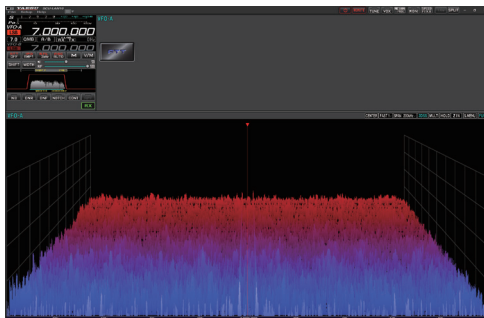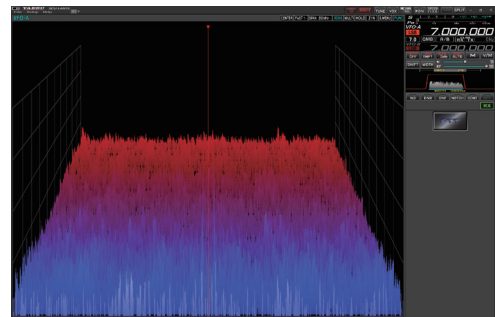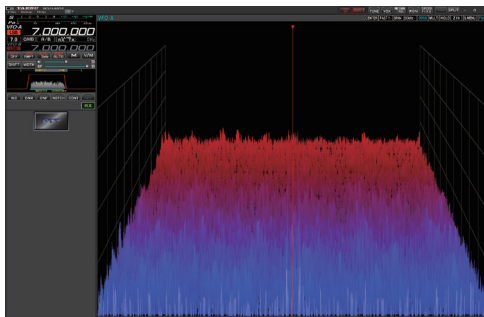

Click & Hold: To reset the size of the changed display area on the screen to the default setting.

## Transmission function button

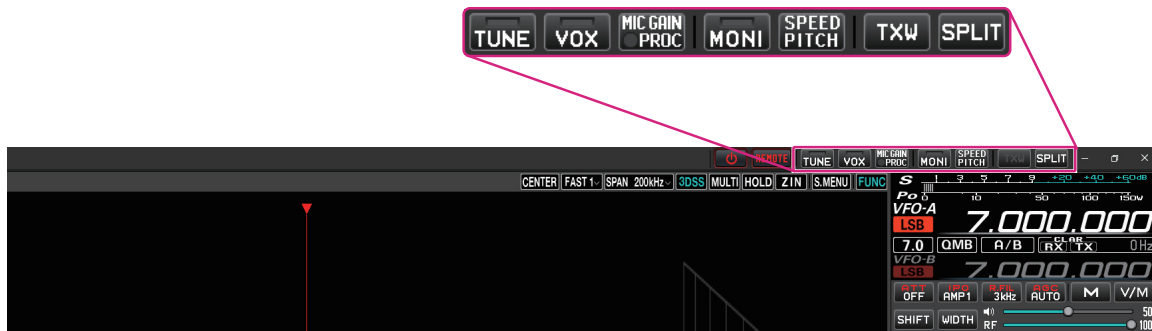

### TUNE button



**Click:** Switches the antenna tuner ON / OFF.  
When ON, the button indicator lights red.


**Click & Hold:** The transceiver will switch to the transmit mode, and automatically start the antenna tuner.

### VOX button



**Click:** Switches VOX ON / OFF.  
When ON, the button indicator lights red.


**Right click:** The VOX settings window opens.

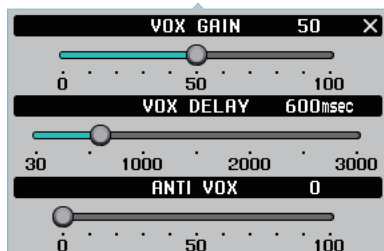

### MIC GAIN/PROC button



**Click:** Switches the PROC ON / OFF. (Only works in LSB / USB modes)  
When ON, the round indicator on the button lights red.

**Right click:** The MIC GAIN / AMC / PROC settings window opens.  
To keep the MIC GAIN / AMC / PROC settings window displayed, click the [Pin Button]  in the upper right of the window.



### MONI button




- Click:** Switches MONITOR ON / OFF.  
When ON, the button indicator lights red.
- Right click:** The MONITOR level settings window opens.



### SPEED/PITCH button



- Click:** The CW SPEED and CW PITCH settings window opens.

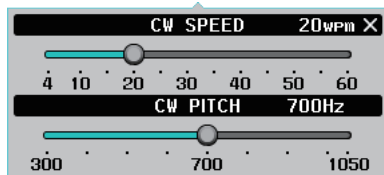

### TXW button



- Click:** The transmission and reception frequencies are switched during SPLIT ON.  
When ON, the button flashes in red.


### SPLIT button




- Click:** Switches the SPLIT function ON / OFF.  
When ON, the button is displayed in red.
- Click & Hold:** With the quick split function, the opposite VFO is set to the frequency obtained by adding the “offset frequency setting value of the quick split function (initial setting value: +5 kHz)” to the current VFO frequency, and the split function is turned ON.  
When the split function is ON, the “offset frequency setting value of the quick split function (initial setting value: +5 kHz)” is added to the current VFO-B frequency each time you click and hold.
- Right click:** The setting screen for the offset frequency of the split function opens.




When set to “DELTA”, the offset value of the transmission frequency with respect to the reception frequency is displayed as “+” or “-”. (If the offset exceeds 100kHz, the normal frequency display will be displayed.)

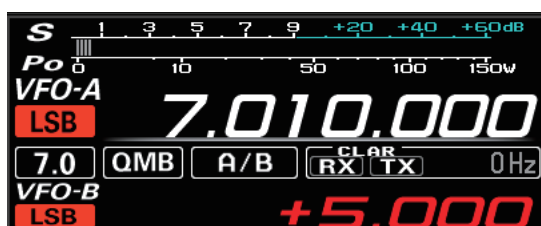

## FUNC button (Function menu display)

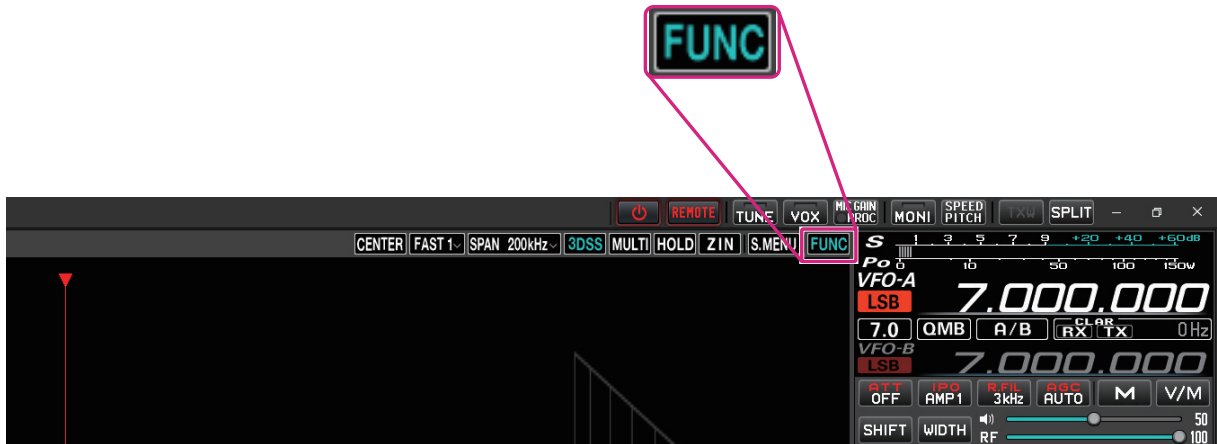




Displays the function menu screen for setting various functions. (Some items are different from the transceiver function menu display.)

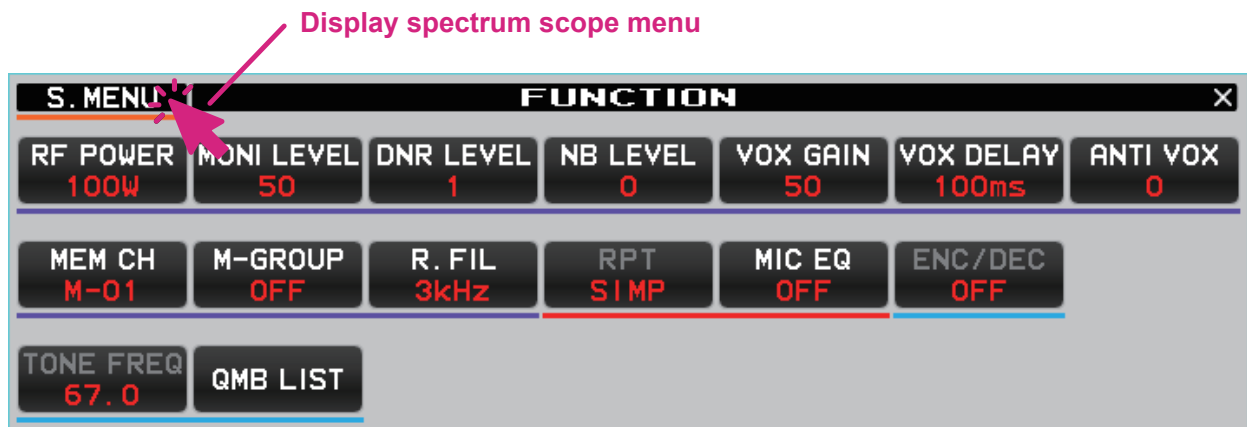

## RF POWER button



Adjust the current transmit frequency (HF / 50MHz band) or communication mode (AM mode) and the transmit output of each.



The maximum transmit power that can be set is less than or equal to the following MAX POWER set in the transceiver set mode.

SET MODE [OPERATION SETTING] → [TX GENERAL]

- HF MAX POWER (HF)
- 50M MAX POWER (50MHz)
- AM MAX POWER (AM Mode)

### MONI LEVEL button

MONI LEVEL  
50

Monitor level adjustment



### DNR LEVEL button

DNR LEVEL  
1

Set the Digital Noise Reduction response.



### NB LEVEL button

NB LEVEL  
0

Noise blanker level setting



### VOX GAIN button

VOX GAIN  
50

VOX gain setting



### VOX DELAY button

VOX DELAY  
500ms

The “Hang-Time” of the VOX system (the transmit-receive delay after the cessation of speech) may also be adjusted.



### ANTI VOX button

ANTI VOX  
50

The Anti-Trip setting sets the negative feedback of receiver audio to the microphone, to prevent receiver audio from activating the transmitter



### MEM CH button

Selects the memory channel in memory mode.

MEM CH  
M-01

**Click:** Select memory channels in sequence.

**Wheel:** Select a memory channel.

### M-GROUP button




- Click:** When the memory group function is ON, memory groups are selected in sequence.
- Wheel:** Selects the memory group when the memory group function is ON.
- Right click:** Select ON / OFF of the memory group function.



### R.FIL button



Select the bandwidth of the roofing filter. The bandwidth of the roofing filter that can be selected depends on the communication mode.



- Roofing filters that are not included in the remote control transceiver are not displayed.
- 300Hz roofing filters is optional.
- Keyboard shortcuts  
r key

### RPT button



Select the shift direction when operating through a repeater.



- SIMP:** Both transmit and receive have the same frequency.
- + (plus):** Transmit is at a higher frequency than the receive frequency (default setting is +100kHz).
- (minus):** Transmit is at a lower frequency than the receive frequency (default setting is -100kHz).

### MIC EQ button

Select the parametric microphone equalizer function ON / OFF.



The parameters of the microphone equalizer cannot be set with the remote control.

### ENC/DEC button




Turn the tone encoder function or tone squelch function ON.



### TONE FREQ button



Set the tone frequency for the tone encoder function and tone squelch function.



## QMB LIST button

QMB LIST


You can check or delete the contents stored in the QMB (quick memory bank) of the current frequency band. Also, the number of QMB channels can be selected from 5ch or 10ch.

QMB LIST						X
1	--.---.---	-----	6	--.---.---	-----	10ch
2	--.---.---	-----	7	--.---.---	-----	
3	--.---.---	-----	8	--.---.---	-----	
4	--.---.---	-----	9	--.---.---	-----	
5	--.---.---	-----	10	--.---.---	-----	DELETE

# Spectrum scope area


## Screen operation

### 3DSS display

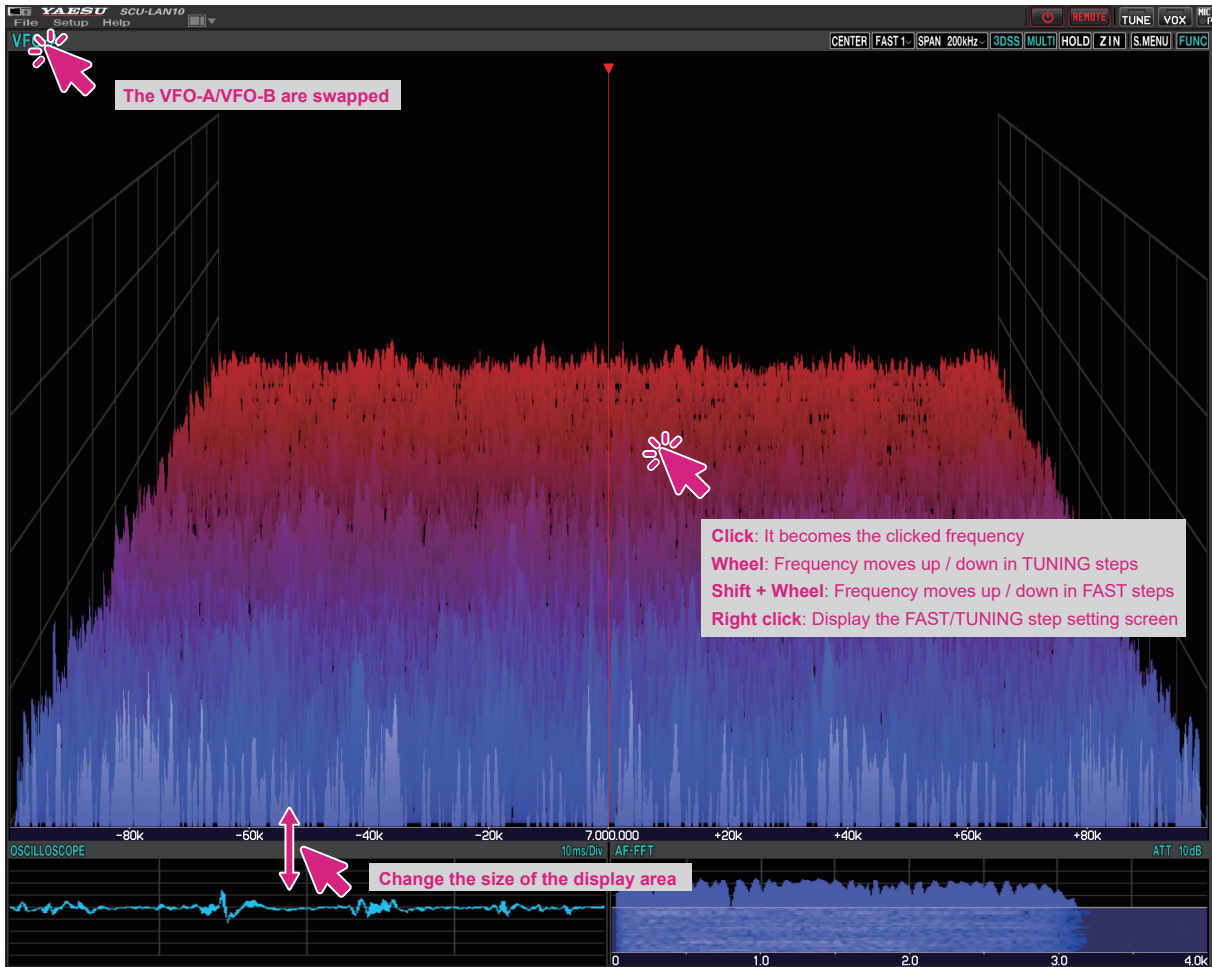

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.

### Water fall display

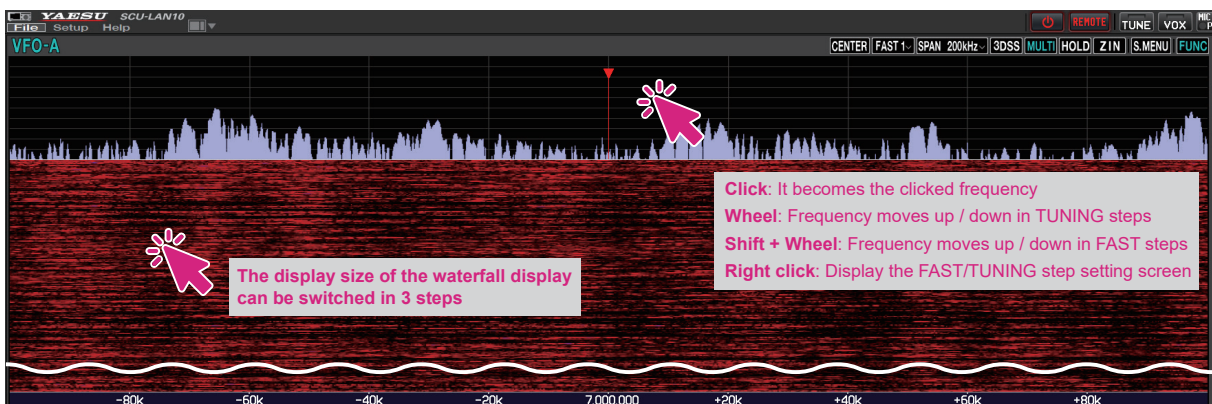

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.



- **Turn the wheel to change the receive frequency**

Turn the **mouse wheel** on the spectrum scope screen to change the frequency in the set “**TUNING**” step. If you turn the **mouse wheel** while pressing the **[SHIFT]** key on the keyboard, the frequency will increase or decrease in “**FAST**” steps.

- **Click to change the receive frequency**

Click on the spectrum scope screen to jump to that frequency. You can then turn the mouse wheel to tune the frequency and hear the desired signal.

- **Right-click to change the steps**

Right-click on the spectrum scope screen to display the setting screen for the FAST step and TUNING step.


- **MAIN / SUB band display switching**

**VFO-A / VFO-B**

The display positions of the MAIN band and the SUB band will swap each time you click.


- **Change the size of the MAIN / SUB area**

The size\* of the MAIN band and SUB band display area may be changed by dragging the mouse cursor when it changes to “↕”.


\*You can initialize the size by clicking and holding the screen layout icon .

- **Resize the waterfall display area**

While the spectrum scope is in the waterfall display, the size\* of the display area may be changed in 3 steps by clicking the waterfall display.

\*You can initialize the size by clicking and holding the screen layout icon .

## Scope function button

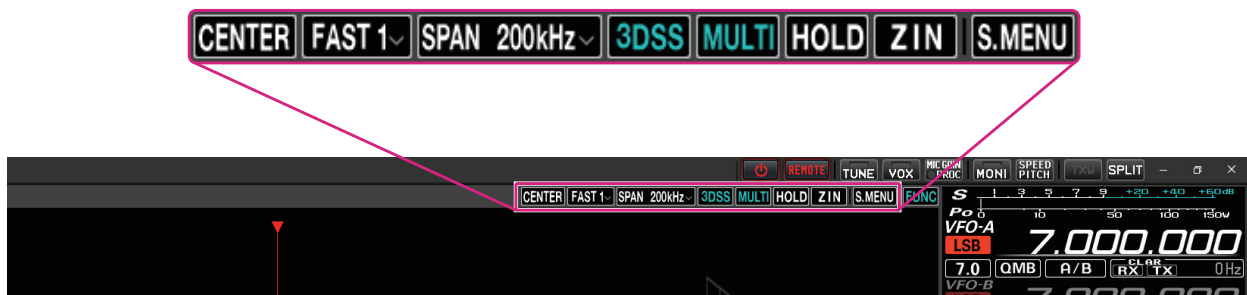

## CENTER / CURSOR / FIX button

**CENTER / CURSOR / FIX**

Switches the operation of the spectrum scope.

**Click:** The CENTER display, CURSOR display, and FIX display switch each time the button is clicked.

**Click & Hold:**

- If you click and hold the button while in CENTER or CURSOR, the digits below 100 Hz of the receive frequency will be zero.
- If you click and hold the button during FIX, the receive frequency will return to the scope start frequency.

**Right Click:** Right clicking the button during FIX will open a pop-up screen for entering the scope start frequency (left edge).



**Keyboard operation:**

**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**⌫**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

**SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons**



Switches the scope display speed.

**Click:** A popup screen for selecting the speed of the scope display is displayed.



<b>SLOW1:</b>	sweep speed	Slow
<b>SLOW2:</b>	sweep speed	↑
<b>FAST1:</b>	sweep speed	Normal
<b>FAST2:</b>	sweep speed	↓
<b>FAST3:</b>	sweep speed	Fast



The settings for this feature apply only to the remote-control software.

**SPAN button**



Sets the frequency span (display range) of the scope screen.

**Click:** A popup screen for selecting the span of the scope display is displayed.



Keyboard shortcuts  
Arrow keys (Left/Right)

**3DSS button**



Switches between the 3DSS display and the waterfall display.

**Click:** The “3DSS” display and “Waterfall” display switch. When “3DSS” is displayed, the button text is displayed in green.

### MULTI (Multi display switching) button



**Click:** Switches to the “multi display” that displays the oscilloscope screen and AF-FFT screen. When “MULTI” is displayed, the button text is displayed in green.

**Click & Hold:** Clicking and holding the button during “Multi display” will change the display position of the oscilloscope screen and AF-FFT screen.

### HOLD button



Temporarily suspends waveform drawing on both the MAIN / SUB scope screen and the receive filter screen.

**Click:** Switches between pause / cancel.  
The button flashes red and appears during pause.

### ZIN (auto Zero-in) button




While receiving a CW signal in CW mode, it can be automatically adjusted (zero-in) to the frequency of the partner station so that it matches the received PITCH (pitch).

**Click:** If you click while receiving a CW signal, it will automatically zero in.

## S.MENU button (Spectrum scope menu display)



Displays the scope menu screen to permit settings related to the scope display.

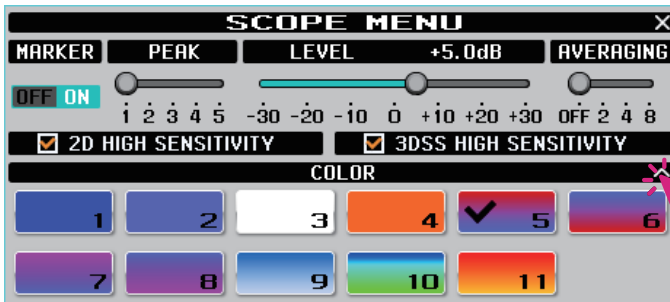

### ● MARKER




Click the button to turn the display of the receive frequency marker (green line) and transmit frequency marker (red line) ON / OFF.



When the operation of the spectrum scope is set to "CENTER", the center of the scope is always the receive frequency, so the receive frequency marker (green) is not displayed.

### ● PEAK



The color density may be adjusted to the level of the signal.

LV1: Light  
LV2: ↑  
LV3: Normal  
LV4: ↓  
LV5: Dark




The settings for this feature apply only to the remote-control software.

### ● LEVEL



Adjust the level to make it easier to distinguish between the desired signal and noise.

● **AVERAGING**



Waveforms are averaged and displayed smoothly.

OFF: Do not average

2 to 8: Display averaging ON



- The AVERAGING setting is common to the MAIN band / SUB band spectrum scope screens.
- This function is available only with the remote-control software.

● **2D HIGH SENSITIVITY**




If a check mark is added, the waterfall display sensitivity will be emphasized.

● **3DSS HIGH SENSITIVITY**



If a check mark is added, the 3DSS display sensitivity will be emphasized.

● **COLOR**

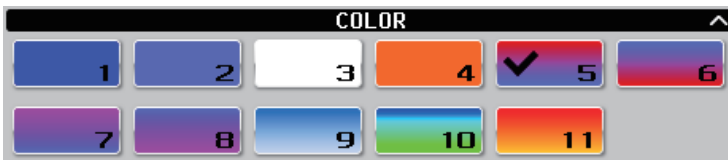


Click the preferred colors to select the display colors.



- The settings for this feature apply only to the remote-control software.

# Oscilloscope / AF-FFT area

## Screen operation

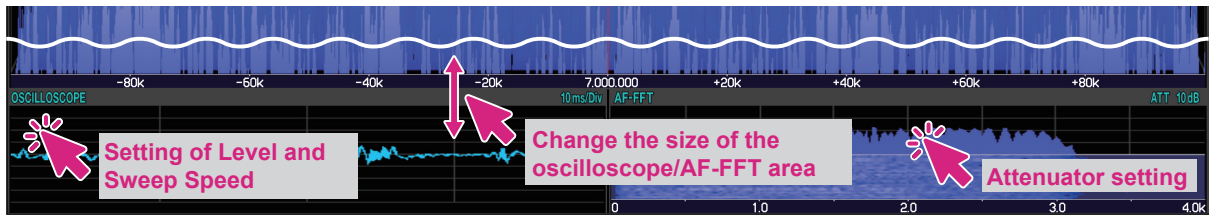

- **Resize oscilloscope / AF-FFT area**

The size\* of the oscilloscope / AF-FFT display area can be reduced by dragging the title bar at the top of the oscilloscope / AF-FFT area.

\*Click and hold the screen layout icon  at the top of the screen to initialize the size.

- **Click to set the level and sweep speed of the oscilloscope**

Click in the oscilloscope display area to set the waveform display level and time axis scale.




- **Attenuator setting (AF-FFT)**

You can set the attenuator by clicking inside the AF-FFT display area.



- **Change the display position**

You can change the display position of the oscilloscope screen and AF-FFT screen by clicking and holding the [MULTI] button during "Multi display".

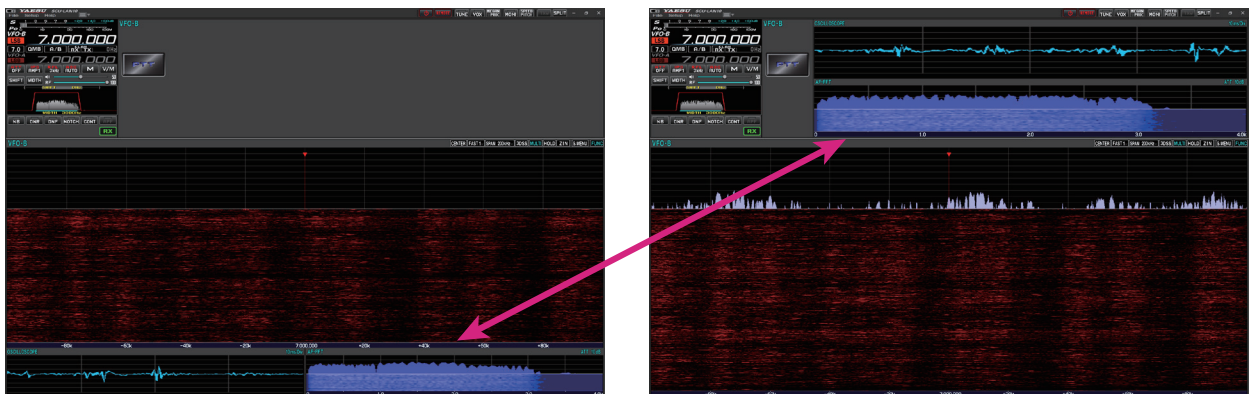

## VFO-A / VFO-B operation area



## Meter operation selection during transmit



**Click:** To select the meter operation during transmit:



- PO: Transmission output display
- ALC: ALC voltage display
- SWR: Antenna SWR display
- COMP: AMC gain control display  
(Compression level display when the speech processor is operating)
- ID: Final stage FET Drain current display
- VDD: Final stage FET Drain voltage display

## Selecting the memory channel

---



**Wheel:** Select the memory channel during a memory channel recall.

## Selecting the QMB channel

---



**Wheel:** Select the QMB channel during a QMB channel recall.



Keyboard shortcuts  
q key

## Selecting the operating mode

---



**Click:** Select the operating mode.



**Right Click:** Switch between the following modes with one touch.

**LSB** ↔ **USB**  
**CW-L** ↔ **CW-U**  
**AM** ↔ **AM-N**  
**FM** ↔ **FM-N**  
**DATA-L** ↔ **DATA-U**  
**DATA-FM** ↔ **D-FM-N**  
**RTTY-L** ↔ **RTTY-U**




Keyboard shortcuts  
LSB/USB: F1 key  
CW-L/CW-U: F2 key  
AM: F3 key  
FM: F4 key



# Frequency change operation

## Switch frequency band


Click the MHz digit or band icon to display the band selection screen.

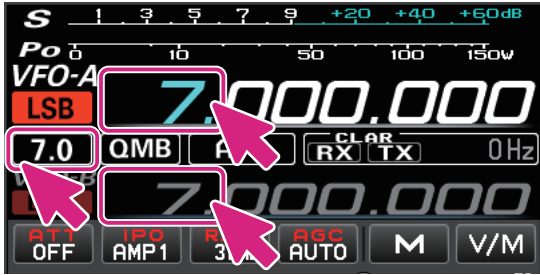

Click: Band selection



## MHz digit

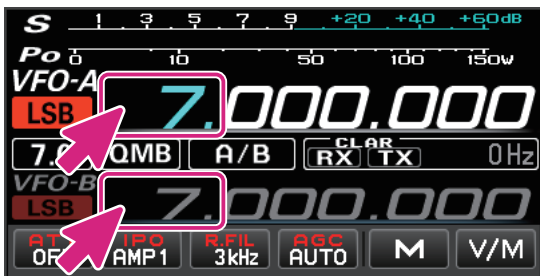


Wheel: Move frequency Up / down at 1MHz

Click: Band selection



Right Click: The numeric keypad screen pops up and you can enter the frequency. You can also click with the mouse, or enter with the number keys on your computer keyboard.



Keyboard operation:


Enter key: Finish the input (**ENT**)

Backspace key: Delete the character before the cursor (**X**)

Delete key: Delete the character (**CE**)

Esc key: Cancels input and closes the numeric keypad screen (**BACK**)

## kHz digit

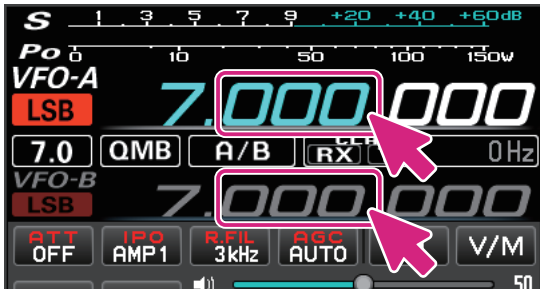


- Wheel:** Frequency moves up/down in FAST steps
- Click:** Click the upper half / lower half of the number move the frequency up/down in FAST steps
- Drag up and down:** Frequency changes up / down in FAST step
- Right Click:** Display the setting screen of FAST step / TUNING step



By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.

## Hz digit

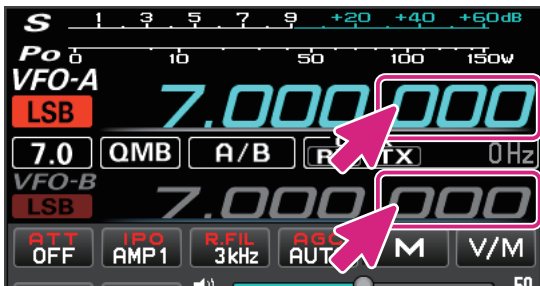

- Wheel:** Frequency goes up / down in TUNING step
- Click:** Click the upper half / lower half of the number to frequency goes up / down the frequency in TUNING steps
- Drag up and down:** Frequency continuously increases / decreases in TUNING steps
- Right Click:** Displays the FAST step / TUNING step setting screen





- In the frequency display, turning the wheel while pressing the [SHIFT] key on the keyboard does not result in the FAST step.
- By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.
- Keyboard shortcuts  
 Current VFO: Page UP key / Page Down key  
 Opposite VFO: Shift + Page UP key / Shift + Page Down key

## QMB Operation



**Click:** Recalls the information stored in QMB in order.



- You can select a QMB channel by turning the wheel while hovering the mouse over the QMB channel number display while recalling QMB.
- Keyboard shortcuts  
q key

**Click & Hold:** Stores up to 5 or 10 channels of the current operating status in a dedicated memory channel (QMB: Quick Memory Bank).

**Right Click:** A list of QMB memories will be displayed.

QMB LIST						
1	--.---.---	-----	6	--.---.---	-----	10ch
2	--.---.---	-----	7	--.---.---	-----	
3	--.---.---	-----	8	--.---.---	-----	
4	--.---.---	-----	9	--.---.---	-----	
5	--.---.---	-----	10	--.---.---	-----	DELETE

Click the QMB channels you want to delete and click the [DELETE] button to delete them.


Click the [5ch] or [10ch] button to switch the number of QMB channels.

## VFO-A / VFO-B operation



**Click:** Switch the VFO-A / VFO-B.

## CLAR (Clarifier) operation

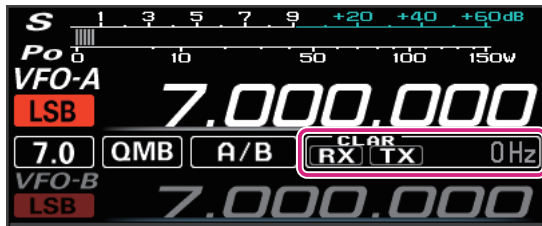

**Click:** Click the [RX] or [TX] button to turn the RX clarifier or TX clarifier ON.

**Wheel:** When the mouse wheel is rotated on the display of the offset amount (difference between reception frequency and transmission frequency), the offset amount changes in 10Hz or 100Hz steps (AM / FM / DATA-FM / D-FM-N).

**Click & Hold:** Click and hold the [RX] or [TX] button to clear the offset amount.

## Receiver setting operation



### ATT (Attenuator) button



Displays the current ATT (Amount of receive input signal attenuation).

**Click:** Select the attenuation level.



### IPO (Intercept Point Optimization) button



Displays the current IPO (Intercept Point Optimization). can establish the gain of the RF amplifier section to accommodate the connected antenna and the received signal conditions.

**Click:** Select from IPO, AMP1 (Approximately 10 dB gain) and AMP2 (Approximately 20 dB gain).



### R.FIL (Roofing Filter Switching) button



Displays the bandwidth of the currently selected roofing filter.

**Click:** Switches the crystal roofing filters of 300Hz, 500Hz, 3kHz, and 12 kHz that are installed in this transceiver.





- Roofing filters that are not included in the remote control transceiver are not displayed.
- 300Hz roofing filter is optional.
- Keyboard shortcuts  
r key

### AGC (Automatic Gain Control) button



Displays the currently selected AGC setting. The AGC system is designed to help compensate for fading and other propagation effects.

**Click:** Select from OFF, AUTO, FAST, MID and SLOW. The “AUTO” selection mode selects the optimum receiver-recovery time for the reception mode.



### Memory channel operation



### M button



When the memory channel list is not displayed:

**Click:** Open the memory channel list.

**Click & Hold:** Writes the VFO data to the last used memory channel and opens the memory channel list.

When the memory channel list is displayed:

**Click:** Close the memory channel list.

**Click & Hold:** The VFO data will be written to the memory channel that was last recalled.

### V/M button



When the memory channel list is not displayed:

**Click:** The VFO and the last used memory channel will be recalled alternately.

You can select a Memory channel by turning the wheel while hovering the mouse over the Memory channel number display while recalling Memory.







**Click & Hold:** Open the memory channel list.


When the memory channel list is displayed:

**Click:** Close the memory channel list.

## Memory channel list operation

CH	FREQ	MODE	NAME	SCAN MEMORY	DISPLAY TYPE
M-01	7.000.000	LSB		SCAN	FREQ
M-02	7.000.000	LSB		SCAN	FREQ
M-03	14.000.000	USB	YAESU	SCAN	FREQ
M-04	--.---.---	-----	-----	----	----
M-05	--.---.---	-----	-----	----	----
M-06	--.---.---	-----	-----	----	----










 The window can be expanded to increase the number of channels displayed by dragging the bottom border of the memory channel list screen.

### Read memory data from radio



The data of all memory channels stored in the transceiver can be read into the remote-control software.

 When memory data is read from the transceiver, the memory data currently set in the remote-control software will be overwritten.

 If the memory data currently held by the remote-control software is written to a different model transceiver, the transferred initial values may not match the different model. Be very careful when writing data to other models.


**Click:** A confirmation screen is displayed. Click **[YES]** to load.


**Right click:** Displays the date and time when the memory data was last read.

### Transfer memory data to transceiver



The data of all memory channels stored in the remote-control software can be transferred to the transceiver.

 In the remote-control software, in addition to the memory data stored in the transceiver, the remote-control software has memory data independently.

 When reading data from a different model transceiver than the memory data currently held by the remote-control software, all the data stored in the memory channels, including the model-dependent data, is transferred and overwritten. Please be careful when reading data from other models.

**Click:** A confirmation screen is displayed. Click **[YES]** to transfer.

**Right click:** Displays the date and time when the memory data was last transferred.

### Recall memory channel



**Click:** Recall the data of the selected memory channel.

### Move memory data to VFO



**Click:** Transfers the data of the selected memory channel to the current VFO.

## Write to memory



**Click:** Writes information such as the current VFO frequency and operation mode to the selected memory channel.

## Erase / Resume Memory Channel




**Click:** Erases or restores the selected memory channel.

**Right click:** A confirmation screen is displayed. Click [YES] to initialize all memory information.



Memory channel "M-01" cannot be erased.

## Editing memory channels

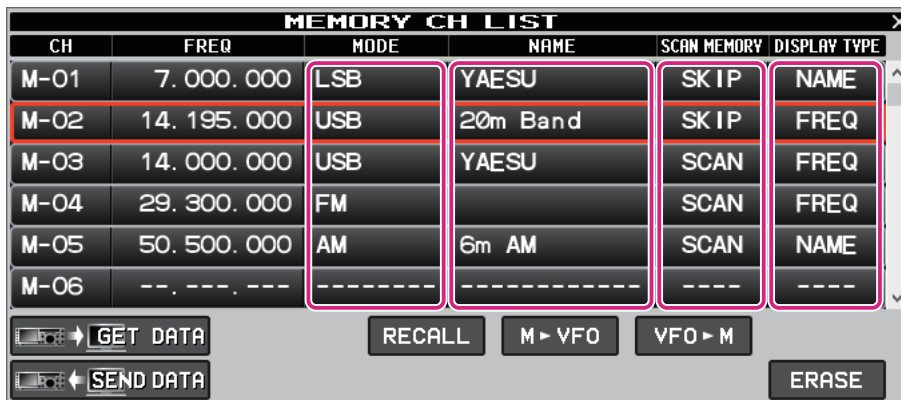

You can edit the contents of the memory channel by right-clicking the MODE, NAME, SCAN MEMORY, and DISPLAY TYPE fields.

### ● MODE

Select the operation mode.



### ● NAME

Edit the alpha tag (maximum 12 characters) of the memory channel.

### ● SCAN MEMORY

When scanning the memory, set the channels you do not want to scan to "SKIP".



### ● DISPLAY TYPE

Set the display when the memory is called to "frequency display" or "alpha tag display".



## AF Gain / RF Gain adjustment

---



### AF (Speaker icon)

Turn the mouse wheel over the slide bar or drag or click to adjust the receive volume.



Each time you click the speaker icon, MUTE & MUTE cancel will switch.

---

### RF (RF GAIN) / SQL

Turn the mouse wheel over the slide bar or drag or click to adjust the RF gain.



Right-click on RF to select whether to adjust RF gain or SQL level.

---

## SHIFT/WIDTH operation

---



### SHIFT button



**Click:** When the button is blue, the IF filter shift frequency can be changed by operating the mouse in the filter function display area.



Keyboard shortcuts  
s key

---

**Click & Hold:** The IF filter shift frequency returns to 0 Hz.



When the radio wave format cannot be shifted, the button is grayed out.

---

### WIDTH button



**Click:** When the button is blue, you can change the IF filter bandwidth by operating the mouse in the filter function display area.



Keyboard shortcuts  
w key

---

**Click & Hold:** The IF filter bandwidth returns to the initial value.




The button is grayed out for radio wave formats where the bandwidth cannot be changed.

---



## Operation of the filter function display area

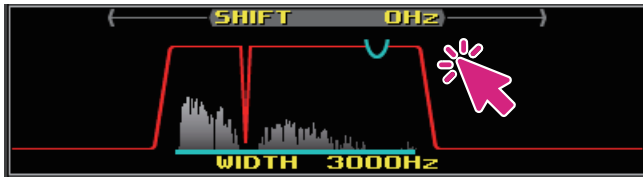

**Right Click:** You can select to show / hide the spectrum display of the signal in the filter function display area.



## Interference Reduction Systems operation




### NB (Noise blanker) button



**Click:** The noise blanker function turns ON / OFF.

**Right click:** The operation setting of the noise blanker function can be changed.

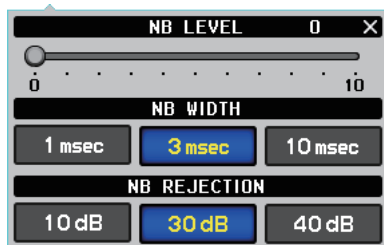

### DNR (Digital Noise Reduction) button



**Click:** The digital noise reduction function turns ON / OFF.

**Right click:** You can set the level of the digital noise reduction function.



### DNF (Digital NOTCH Filter) button



**Click:** The digital NOTCH filter function turns ON / OFF.

### NOTCH (IF NOTCH Filter) button



**Click:** The IF NOTCH filter function turns ON / OFF.



Keyboard shortcuts  
n key

**Right click:** The bandwidth of the IF NOTCH filter function can be selected.



### CONT (Contour) button




**Click:** The Contour function turns ON / OFF.



Keyboard shortcuts  
c key

**Right click:** The attenuation and bandwidth of the contour function can be set.

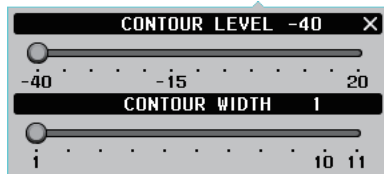

### APF (Audio Peak Filter) button



The APF function is for CW mode only.



**Click:** The APF function turns ON / OFF.

**Right click:** The bandwidth of the APF function can be set.



## PTT operation

---



### PTT button

**Click & Hold:** To transmit

---




Keyboard shortcuts  
Space key

---


**Right click:** To switch the button function between “PTT” and “MOX”.



## MENU bar

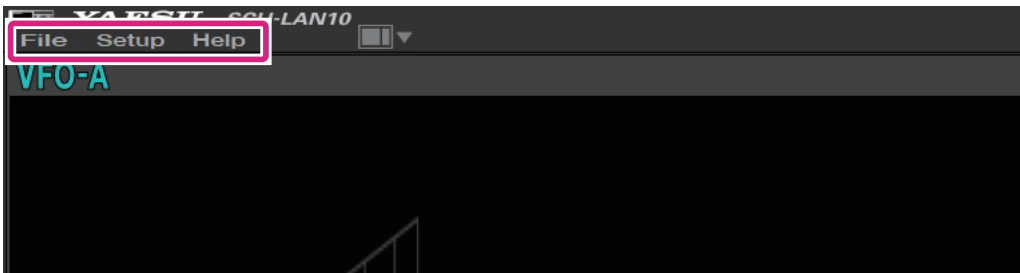


## File

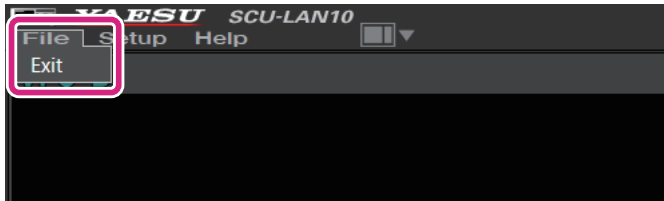


**Exit:** Closes the remote-control software.

## Setup

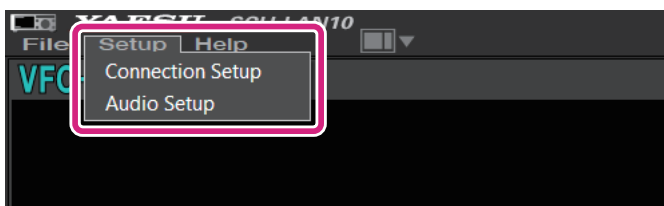


**Connection Setup:** Make settings related to connection with SCU-LAN10.  
There is no need to change it if you have set it once at the beginning.

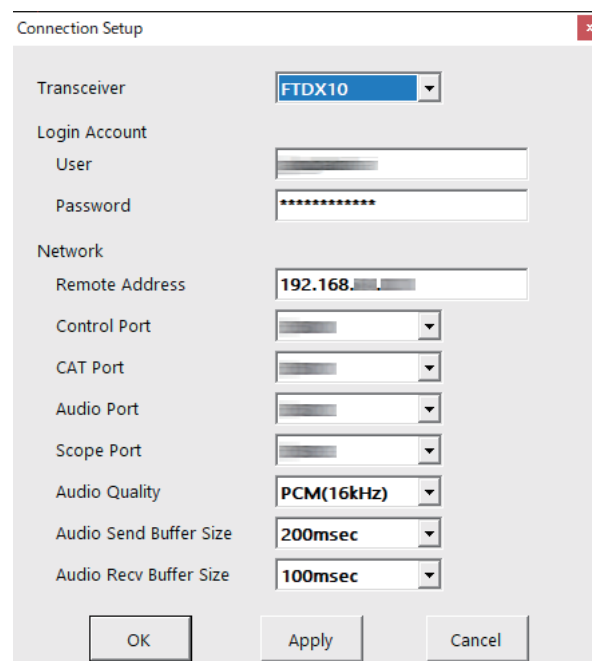

While remotely connected to the SCU-LAN10, it is grayed out and you can only check the settings.

For details, refer to the SCU-LAN10 Installation Manual.

**Audio Setup:** Opens the audio level settings screen.

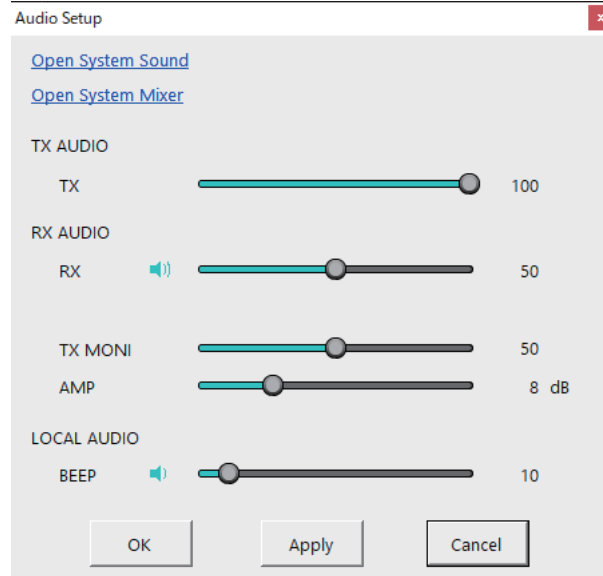

**Open System Sound**  
**Open System Mixer**


The Windows **“Sound”** screen appears.

The Windows **“Volume Mixer”** screen appears.

For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual.

**TX AUDIO**  
**TX**


Adjust the transmit modulation level.

This adjustment is the same as adjusting the MIC GAIN adjustment bar that appears when you right-click the MIC GAIN / PROC button .



**RX AUDIO**  
**RX**

Adjusts the receive volume of the MAIN band.

This adjustment is the same as adjusting the volume control bar  on the VFO operation area.



**TX MONI**

Adjusts the volume of the transmitted audio that is monitored by the monitor function.

This adjustment is the same as the MONI adjustment bar  that appears when you right-click the **MONI** button.



**AMP**

Adjust this when the receive audio of the MAIN / SUB band or the TX MONI volume is extremely low or distorted even when the Windows volume adjustment or the above volume adjustment is performed. Normally you do not need to change. (Factory setting: 8 dB)


**LOCAL AUDIO**  
**BEEP**

Adjusts the beep volume when operating the remote-control software.



If the volume is extremely low even if you adjust it on the “Audio Setup” screen, or if the sound is too loud and distorted, use Windows to adjust the volume. For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual. If you are still unable to make adjustments, change the RX AUDIO “AMP” setting above.

## Help

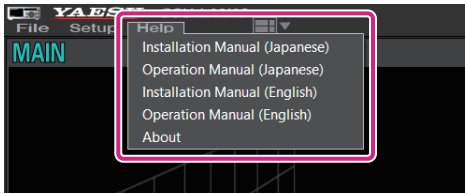

- Installation Manual (Japanese):** Open the Installation Manual (Japanese)  
**Operation Manual (Japanese):** Open the Operation Manual (Japanese)  
**Installation Manual (English):** Open the Installation Manual (English)  
**Operation Manual (English):** Open the Operation Manual (English) (This Manual)

**About:** Displays information about this software.

## Shortcut keys

The functions in the table below can be operated with the keys on the PC keyboard.

Function	Shortcut
Spectrum scope span (wide)	Cursor key Right (→)
Spectrum scope span (narrow)	Cursor key Left (←)
VFO frequency Up	Page Up key (current VFO) Shift + Page Up key (opposite VFO)
VFO frequency Down	Page Down key (current VFO) Shift + Page Down key (opposite VFO)
AF GAIN Up	Cursor key Up (↑)
AF GAIN Down	Cursor key Down (↓)
SHIFT function select	s key
WIDTH function select	w key
Roofing filter select	r key
NOTCH function select	n key
CONTOUR function select	c key
Mode select (LSB / USB)	F1 key
Mode select (CW-L / CW-U)	F2 key
Mode select (AM)	F3 key
Mode select (FM)	F4 key
QMB recall	q key
PTT (Transmission)	Space key

# Basic Operation (FT-710)


## Starting the SCU-LAN10 Remote Software

1. Click the Windows **Start** button, and then click the [YAESU SCU-LAN10] icon in the “Yaesu Musen” group to start the remote-control software.




- You can also double-click the [YAESU SCU-LAN10] icon on the desktop to start the remotecontrol software.
- If the transceiver (FT-710) to be used is not set to “**Connection Setup**” of the “**Setup**” menu on the upper left of the screen, some functions and the screen display will not work properly. For details on the settings, refer to “**SCU-LAN10 Installation Manual**”.
- When connecting to the SCU-LAN10 for the first time, the “**Connection Setup**” screen will be displayed automatically. Set it by referring to the “**SCU-LAN10 Installation Manual**”.

2. Click the [  ] button.

The “  ” button and the “**REMOTE**” button turns red during remote control.



- The [REMOTE] button starts or stops the remote control. Click the [REMOTE] button to turn it ON automatically when the transceiver is turned OFF. If the remote control is disconnected due to network instability, you can restart it by clicking the [REMOTE] button.
- When using the remote-control software for the first time, a warning screen of Windows or firewall software may appear. In this case, set it to allow (unblock) Internet access from the remote-control software.

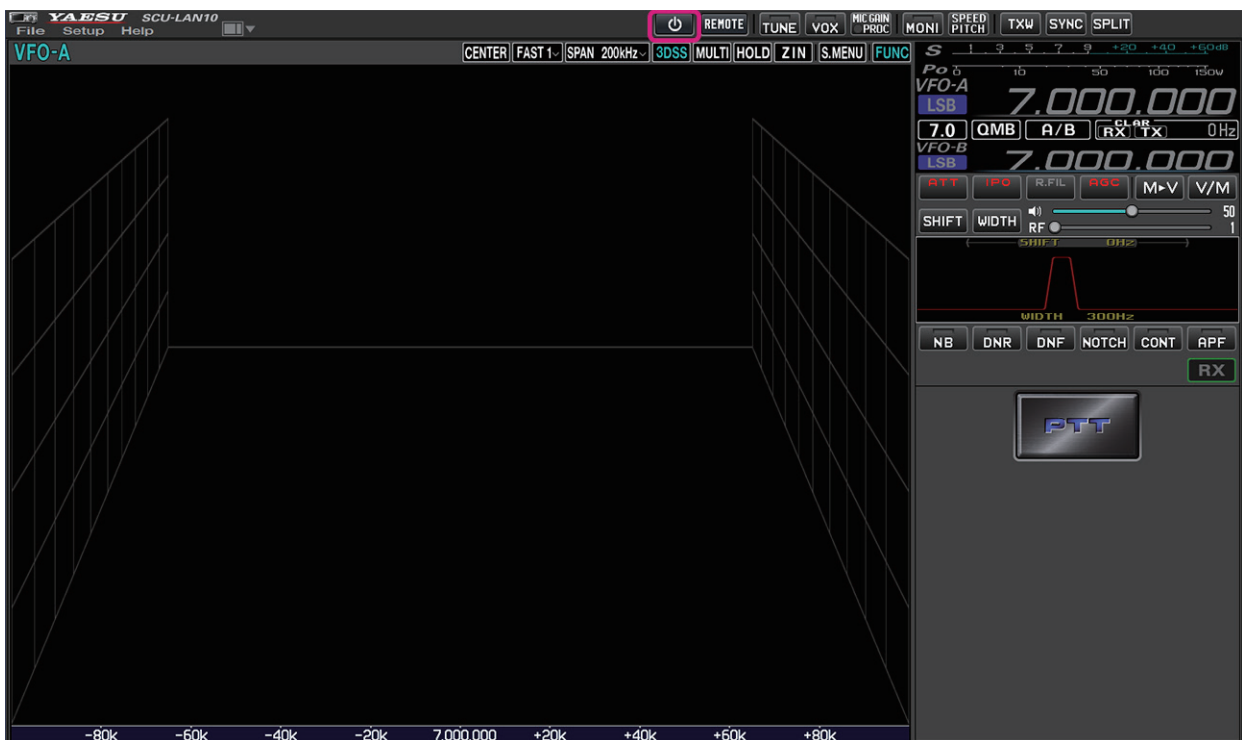


## Remote control software screen

By default, the MAIN band is displayed on the upper area of the screen, the SUB band is displayed on the lower area, the spectrum scope is displayed on the left side of the screen, and the frequency and meter are displayed on the right side.




- The size and layout of each area will be adjusted automatically depending on the screen resolution of your computer, so the display may differ slightly from the example below.
- In the display example below, the **[MULTI]** button is may be clicked to display the oscilloscope and the AF-FFT.

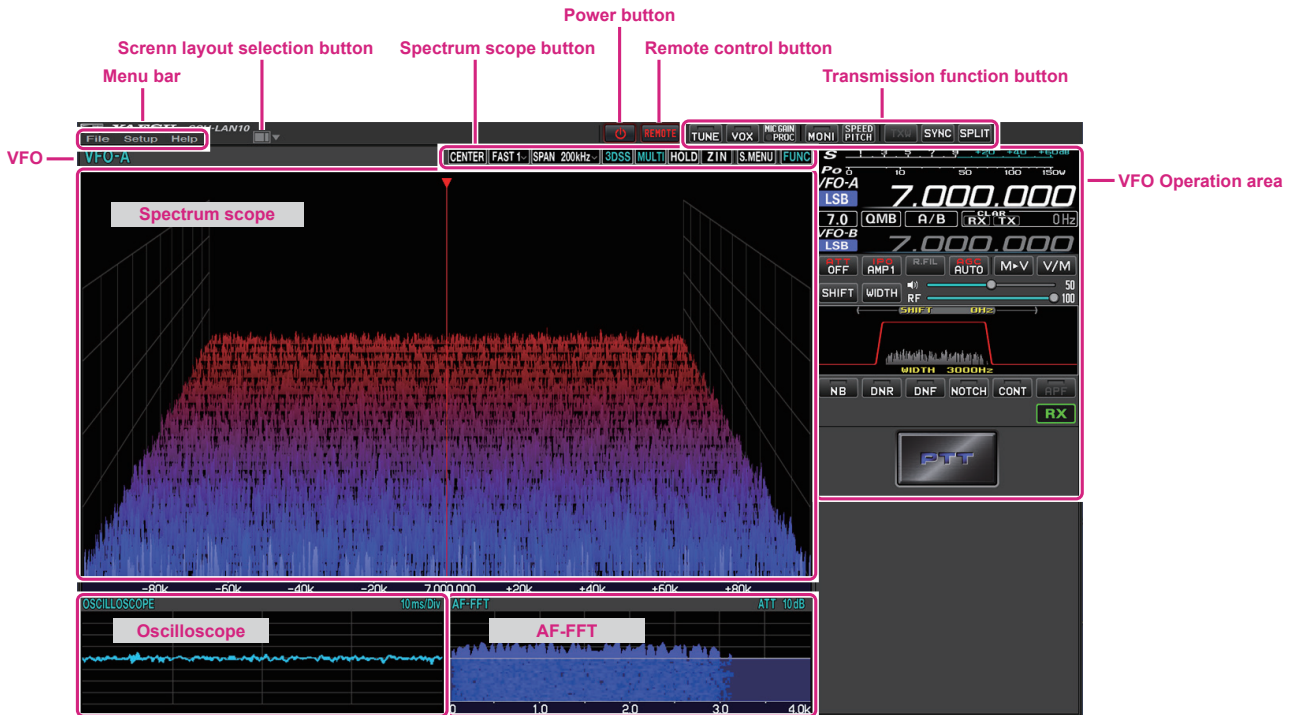

## Select screen layout

Screen layout selection button

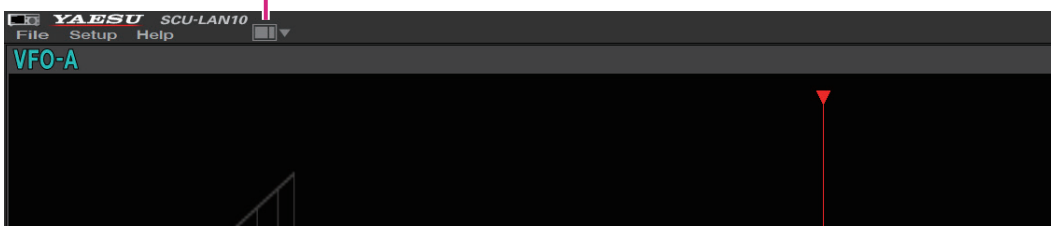

**Click:** Select the screen layout from 5 types.




**Click & Hold:** Returns the size of each area on the screen to the default settings.



## Adjusting the receiver volume

### AF GAIN (Speaker icon)

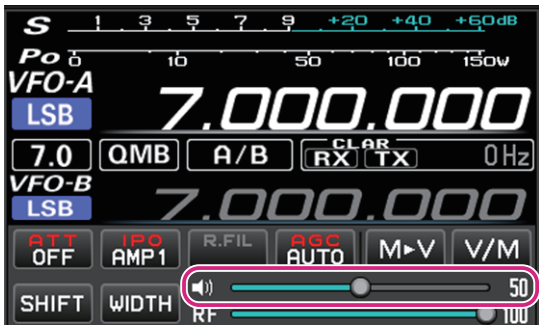

Turn the **mouse wheel**, or drag or click on the slide bar to adjust the receive audio to a comfortable volume.




- Each time you click the speaker icon, mute & mute cancel are switched.
- Keyboard shortcuts  
Arrow keys (Up/Down)

## Change frequency

### Switch frequency band

1. Click the MHz digit or the Band icon to display the band selection screen.

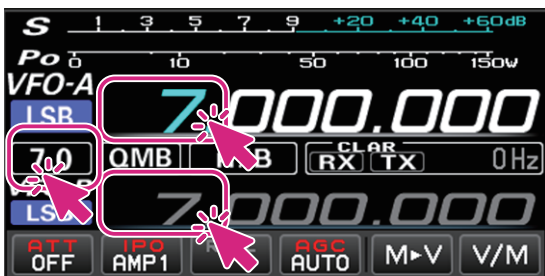

2. Click the desired band.



### Change frequency

There are three ways to change the frequency:

#### (1) Mouse wheel operation and drag operation

##### • MHz digit


1. When you mouse over the MHz digit of the frequency, the number turns blue.



2. In this state, turning the mouse wheel will change the frequency in 1MHz steps.

● kHz digit

1. When you mouseover the 3 digits of the frequency from 100kHz to 1kHz, the digits higher than 1kHz turn blue.

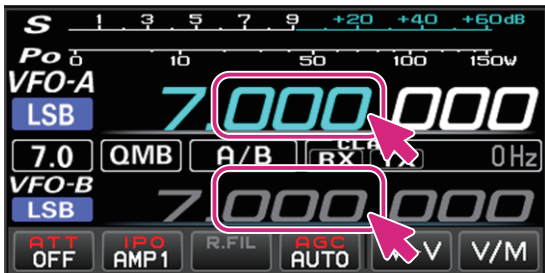


2. In this state, turning the mouse wheel will change the frequency in the set “FAST” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “FAST” step.
  - If you move the mouse up or down while clicking the number, the frequency will change continuously with the set “FAST” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “Changing the tuning step” on the next page.



By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.

● Hz digit

1. When you mouseover the 3 digits of the frequency from 100Hz to 1Hz, all the digits of the frequency change to blue.

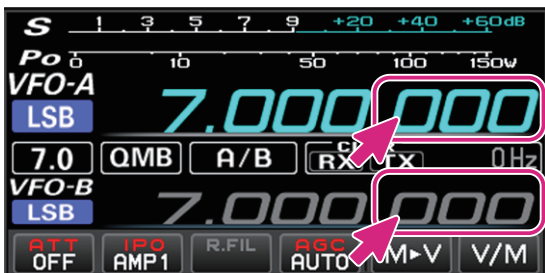


2. In this state, turning the mouse wheel will change the frequency in the set “TUNING” step.
  - Click in the upper or lower half of the number to increase or decrease the frequency in the set “TUNING” steps.
  - If you click the number and then move the mouse up or down, the frequency will change continuously at the “TUNING” step.
  - Right-click on the 100kHz or 1Hz digit to select the FAST step or TUNING step. For details, see “Changing the tuning step” on the next page.



- By holding down the [SHIFT] key on the keyboard and clicking a number from 100kHz to 1Hz, you can zero the numbers below that digit with a single touch.
- Turning the wheel while holding down the [SHIFT] key on the keyboard does not change the TUNING step to the FAST step.
- Keyboard shortcuts  
Current VFO: Page UP key/Page Down key

• **Change the frequency step**

1. Right-click on the digit from 100kHz to 1Hz of the frequency to display the setting screen for the FAST step and TUNING step.
2. Click on the desired FAST step or TUNING step.

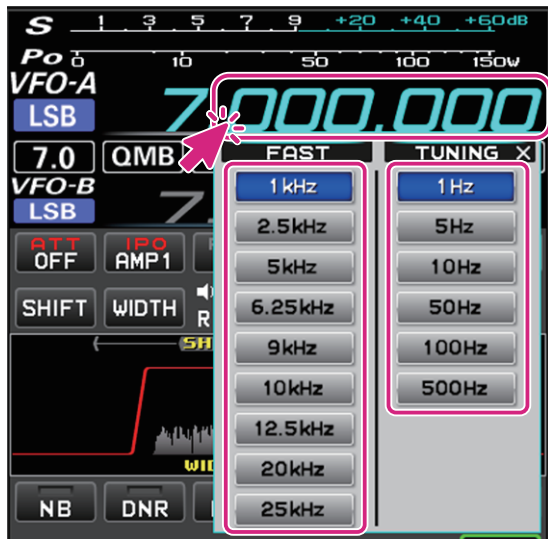


**(2) Change the frequency on the spectrum scope screen**

1. Move the mouse cursor to the display area of the spectrum scope and turn the mouse wheel to change the frequency in the set “TUNING” step.
  - In the Spectrum Scope screen, press and hold the [SHIFT] key on the keyboard and turn the mouse wheel to increase or decrease the frequency in the set FAST steps.
  - When you click on the point you want to receive such as the peak of the signal on the spectrum scope screen, the frequency jumps to the vicinity. You can then turn the mouse wheel to fine tune the frequency and hear the desired signal.




### (3) Enter the frequency on the numeric keypad screen

1. Right-click on the MHz digit of the frequency to display the numeric keypad screen.

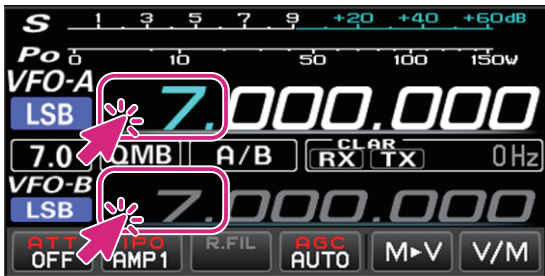

2. You can enter the frequency by clicking on the screen or using the keys on your computer.



#### Keyboard operation:

**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**⌫**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

#### ● Select mode

1. Click the mode icon.



2. Click on the desired mode.



- You can right-click the mode icon to switch between the following modes with one touch:  
**LSB↔USB; CW-L↔CW-U; AM↔AM-N; FM↔FM-N; DATA-L↔DATA-U; DATA-FM↔D-FM-N; RTTY-L↔RTTY-U**



- Keyboard shortcuts  
LSB / USB: F1 key  
CW-L / CW-U: F2 key  
AM: F3 key  
FM: F4 key

## Meter operation selection during transmit

---

1. Click on the S/Power meter.



2. Click on the desired meter function.




## Transmitting

---

1. While clicking and holding the **PTT** button, the transceiver will be in transmit status.  
The TX icon is displayed above the frequency during transmission.



 Keyboard shortcuts  
Space key

---

2. Speak into the microphone of the computer.
3. Release the PTT button to return to receive.

### ● Change to the MOX button

Change the PTT button to the MOX button.

1. Right-click the PTT button to display the “PTT” and “MOX” setting screens.



2. Click MOX.

# On Screen Functions & Controls (FT-710)

## Power button

Power button



**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver automatically turns OFF and remote control stops.

## Remote button

Remote control button



**Click:** When not in remote control, the transceiver automatically powers ON and remote control starts. During remote control, the transceiver remains ON and only remote control stops.



If the remote control is disconnected due to network instability, etc., you can restart the remote control by clicking the [REMOTE] button.

### • Warning sign

If the warning sign illuminates or occasionally opens, there may be a problem with the network line or port open settings. Refer to the SCU-LAN10 Installation Manual and restart the settings from the beginning. Click the warning sign to see the detected issues.








# Screen layout selection button

Screen layout selection button




Click:

Select a screen layout from 5 types.

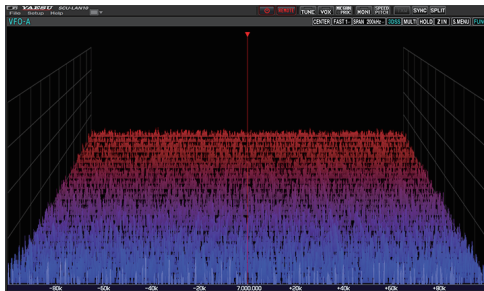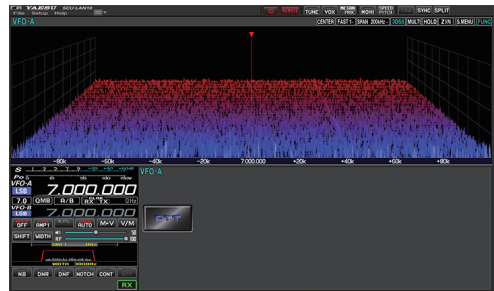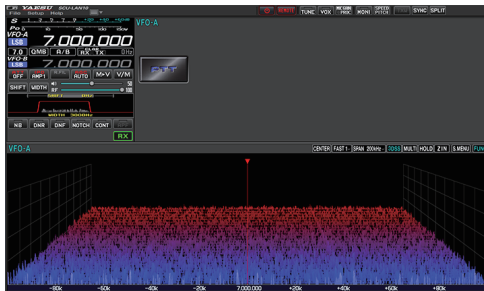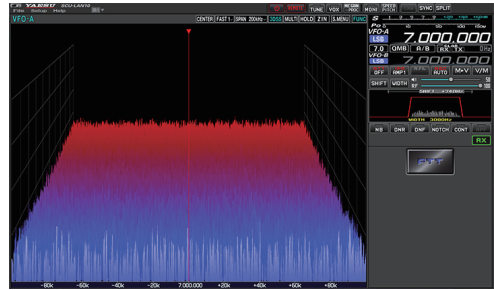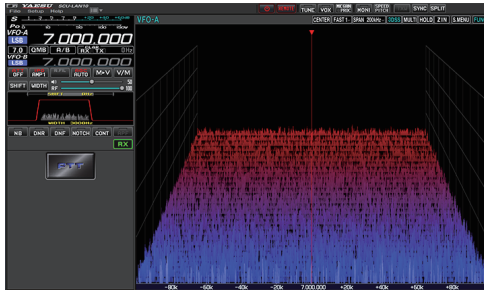

Click & Hold: To reset the size of the changed display area on the screen to the default setting.

## Transmission function button

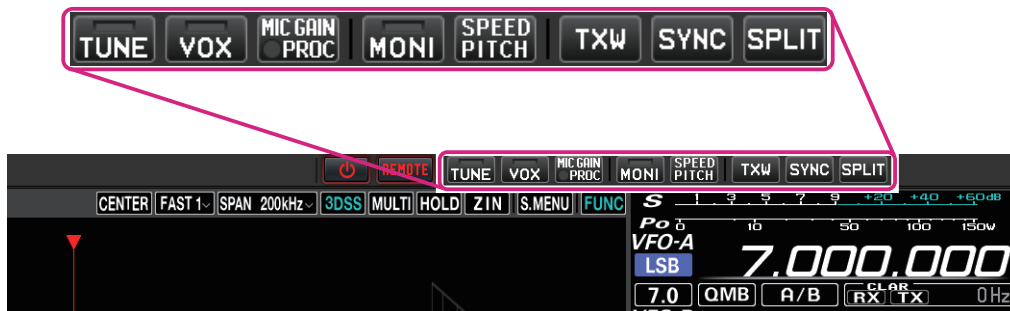

### TUNE button



**Click:** Switches the antenna tuner ON / OFF.  
When ON, the button indicator lights red.


**Click & Hold:** The transceiver will switch to the transmit mode, and automatically start the antenna tuner.

### VOX button



**Click:** Switches VOX ON / OFF.  
When ON, the button indicator lights red.


**Right click:** The VOX settings window opens.

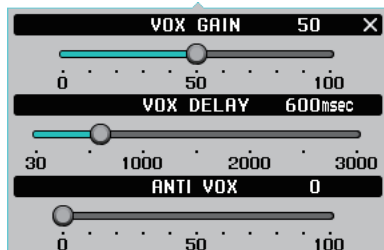

### MIC GAIN/PROC button



**Click:** Switches the PROC ON / OFF. (Only works in LSB / USB modes)  
When ON, the round indicator on the button lights red.

**Right click:** The MIC GAIN / AMC / PROC settings window opens.  
To keep the MIC GAIN / AMC / PROC settings window displayed, click the [Pin Button]  in the upper right of the window.





### MONI button



**Click:** Switches MONITOR ON / OFF.  
When ON, the button indicator lights red.


**Right click:** The MONITOR level settings window opens.



### SPEED/PITCH button



**Click:** The CW SPEED and CW PITCH settings window opens.

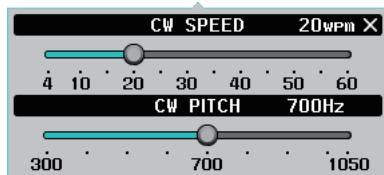

### TXW button



**Click:** The transmission and reception frequencies are switched during SPLIT ON.  
When ON, the button flashes in red.

### SYNC button



**Click:** The VFO-A and VFO-B frequencies change in the same step at the same time.  
When ON, the button is displayed in red.

### SPLIT button




**Click:** Switches the SPLIT function ON / OFF.  
When ON, the button is displayed in red.

**Click & Hold:** With the quick split function, the opposite VFO is set to the frequency obtained by adding the "offset frequency setting value of the quick split function (initial setting value: +5 kHz)" to the current VFO frequency, and the split function is turned ON.  
When the split function is ON, the "offset frequency setting value of the quick split function (initial setting value: +5 kHz)" is added to the current VFO-B frequency each time you click and hold.


**Right click:** The setting screen for the offset frequency of the split function opens.



## FUNC button (Function menu display)

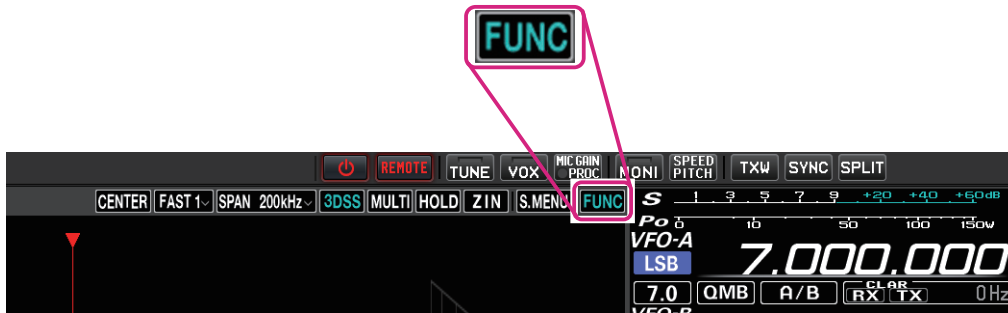




Displays the function menu screen for setting various functions. (Some items are different from the transceiver function menu display.)

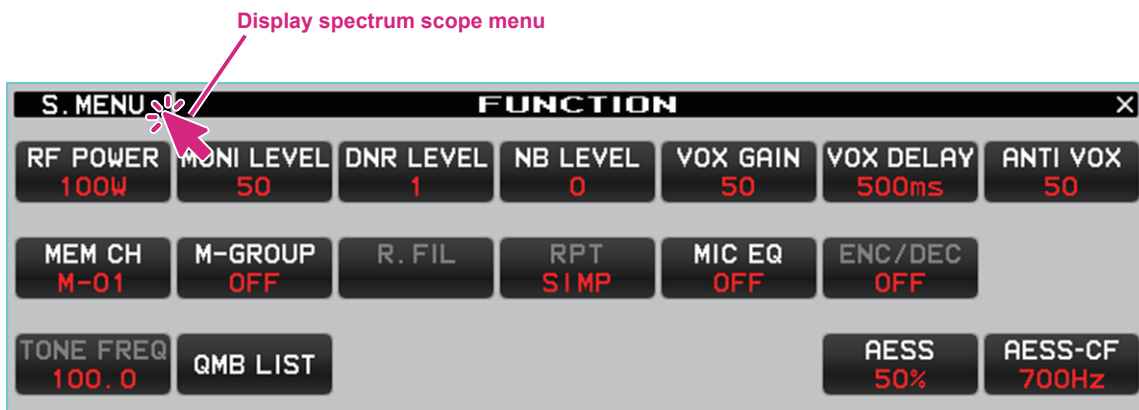

## RF POWER button



Adjust the current transmit frequency (HF / 50MHz band) or communication mode (AM mode) and the transmit output of each.



The maximum transmit power that can be set is less than or equal to the following MAX POWER set in the transceiver set mode.

SET MODE [OPERATION SETTING] → [TX GENERAL]

**HF MAX POWER** (HF)

**50M MAX POWER** (50MHz)

**AM MAX POWER** (AM Mode)

### MONI LEVEL button

MONI LEVEL  
50

Monitor level adjustment



### DNR LEVEL button

DNR LEVEL  
1

Set the Digital Noise Reduction response.



### NB LEVEL button

NB LEVEL  
0

Noise blanker level setting



### VOX GAIN button

VOX GAIN  
50

VOX gain setting



### VOX DELAY button

VOX DELAY  
500ms


The “Hang-Time” of the VOX system (the transmit-receive delay after the cessation of speech) may also be adjusted.



### ANTI VOX button

ANTI VOX  
50

The Anti-Trip setting sets the negative feedback of receiver audio to the microphone, to prevent receiver audio from activating the transmitter



### MEM CH button

Selects the memory channel in memory mode.

MEM CH  
M-01

**Click:** Select memory channels in sequence.

**Wheel:** Select a memory channel.

### M-GROUP button



- Click:** When the memory group function is ON, memory groups are selected in sequence.  
**Wheel:** Selects the memory group when the memory group function is ON.  
**Right click:** Select ON / OFF of the memory group function.



### RPT button



Select the shift direction when operating through a repeater.



- SIMP:** Both transmit and receive have the same frequency.  
**+ (plus):** Transmit is at a higher frequency than the receive frequency (default setting is +100kHz).  
**- (minus):** Transmit is at a lower frequency than the receive frequency (default setting is -100kHz).

### MIC EQ button

Select the parametric microphone equalizer function ON / OFF.



The parameters of the microphone equalizer cannot be set with the remote control.

### ENC/DEC button




Turn the tone encoder function or tone squelch function ON.



### TONE FREQ button



Set the tone frequency for the tone encoder function and tone squelch function.



### QMB LIST button




You can check or delete the contents stored in the QMB (quick memory bank) of the current frequency band. Also, the number of QMB channels can be selected from 5ch or 10ch.

QMB LIST						X
1	--.---.---	-----	6	--.---.---	-----	10ch
2	--.---.---	-----	7	--.---.---	-----	
3	--.---.---	-----	8	--.---.---	-----	
4	--.---.---	-----	9	--.---.---	-----	
5	--.---.---	-----	10	--.---.---	-----	DELETE

# Spectrum scope area


## Screen operation

### 3DSS display

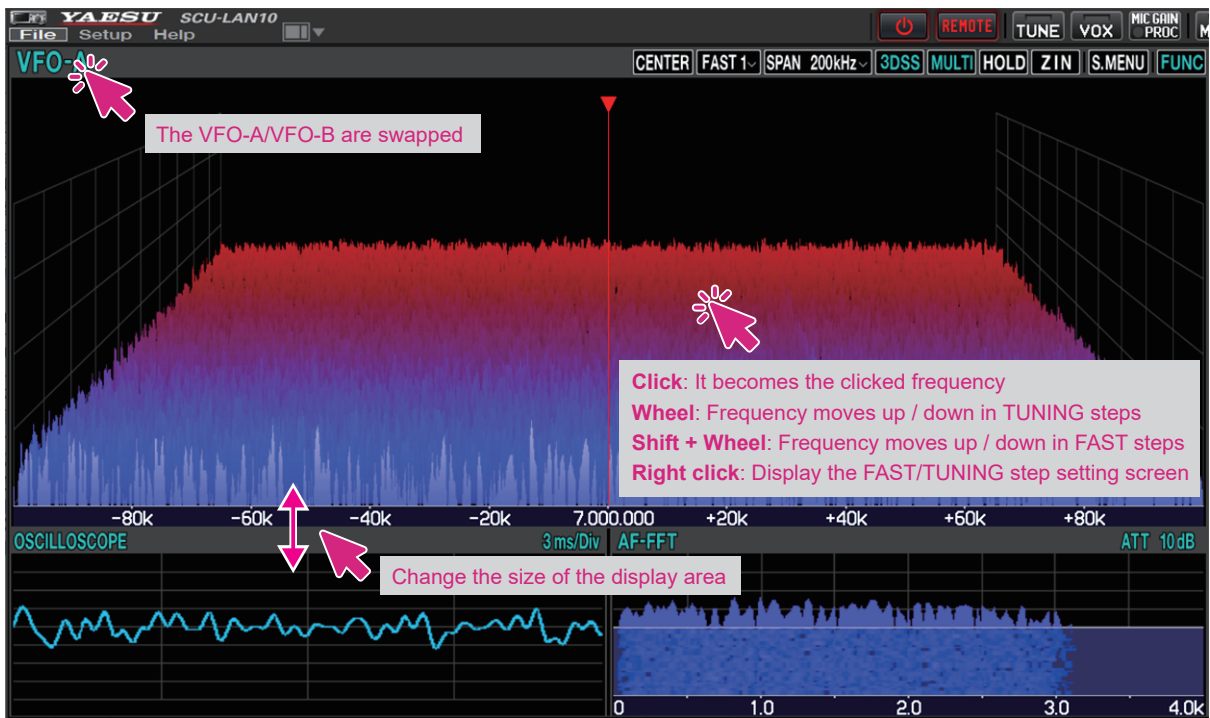

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.

### Water fall display

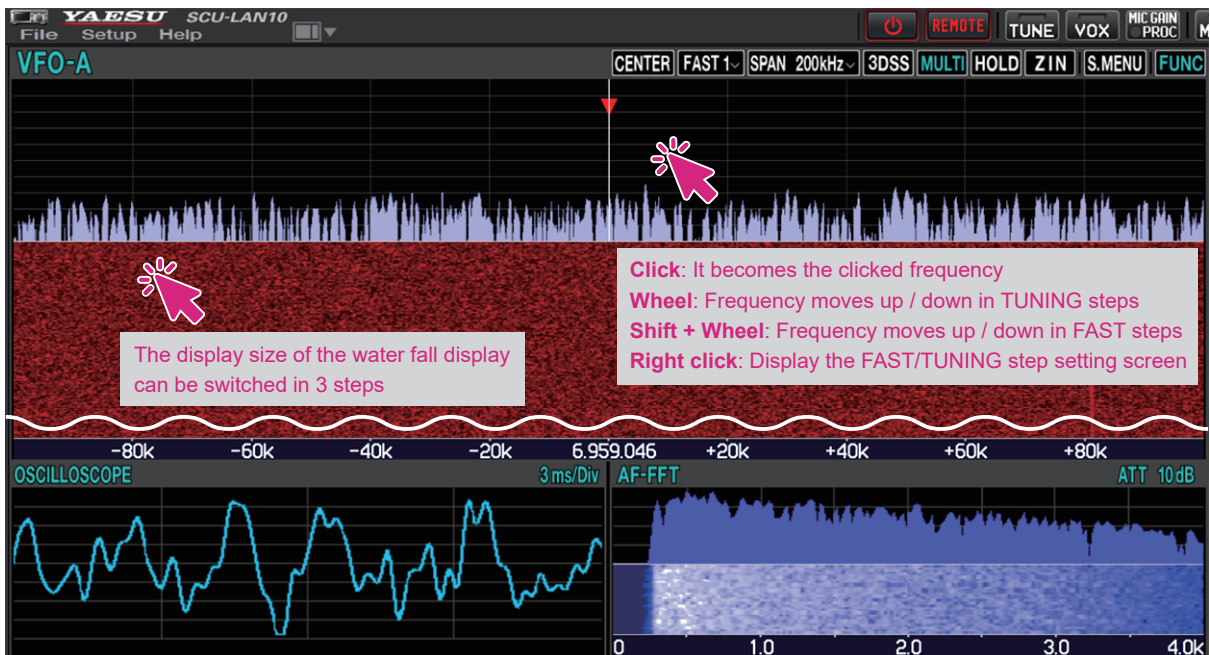

If you hold down the [SHIFT] key on the keyboard and turn the mouse wheel, the frequency will increase or decrease in FAST steps.

- **Turn the wheel to change the receive frequency**

Turn the **mouse wheel** on the spectrum scope screen to change the frequency in the set “**TUNING**” step. If you turn the **mouse wheel** while pressing the **[SHIFT]** key on the keyboard, the frequency will increase or decrease in “**FAST**” steps.

- **Click to change the receive frequency**

Click on the spectrum scope screen to jump to that frequency. You can then turn the mouse wheel to tune the frequency and hear the desired signal.

- **Right-click to change the steps**

Right-click on the spectrum scope screen to display the setting screen for the FAST step and TUNING step.


- **MAIN / SUB band display switching**

**VFO-A / VFO-B**

The display positions of the MAIN band and the SUB band will swap each time you click.


- **Change the size of the MAIN / SUB area**

The size\* of the MAIN band and SUB band display area may be changed by dragging the mouse cursor when it changes to “↕”.

\*You can initialize the size by clicking and holding the screen layout icon .

- **Resize the waterfall display area**

While the spectrum scope is in the waterfall display, the size\* of the display area may be changed in 3 steps by clicking the waterfall display.

\*You can initialize the size by clicking and holding the screen layout icon .

## Scope function button



## CENTER / CURSOR / FIX button

**CENTER / CURSOR / FIX**

Switches the operation of the spectrum scope.

**Click:** The CENTER display, CURSOR display, and FIX display switch each time the button is clicked.

**Click & Hold:**

- If you click and hold the button while in CENTER or CURSOR, the digits below 100 Hz of the receive frequency will be zero.
- If you click and hold the button during FIX, the receive frequency will return to the scope start frequency.

**Right Click:** Right clicking the button during FIX will open a pop-up screen for entering the scope start frequency (left edge).



### Keyboard operation:

**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**X**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

### SLOW1 / SLOW2 / FAST1 / FAST2 / FAST3 buttons



Switches the scope display speed.

**Click:** A popup screen for selecting the speed of the scope display is displayed.



<b>SLOW1:</b>	sweep speed	Slow
<b>SLOW2:</b>	sweep speed	↑
<b>FAST1:</b>	sweep speed	Normal
<b>FAST2:</b>	sweep speed	↓
<b>FAST3:</b>	sweep speed	Fast



The settings for this feature apply only to the remote-control software.

### SPAN button



Sets the frequency span (display range) of the scope screen.

**Click:** A popup screen for selecting the span of the scope display is displayed.



Keyboard shortcuts  
Arrow keys (Left/Right)

### 3DSS button



Switches between the 3DSS display and the waterfall display.

**Click:** The “3DSS” display and “Waterfall” display switch. When “3DSS” is displayed, the button text is displayed in green.

### MULTI (Multi display switching) button



**Click:** Switches to the “multi display” that displays the oscilloscope screen and AF-FFT screen. When “MULTI” is displayed, the button text is displayed in green.

**Click & Hold:** Clicking and holding the button during “Multi display” will change the display position of the oscilloscope screen and AF-FFT screen.

### HOLD button



Temporarily suspends waveform drawing on both the MAIN / SUB scope screen and the receive filter screen.

**Click:** Switches between pause / cancel.  
The button flashes red and appears during pause.

### ZIN (auto Zero-in) button



While receiving a CW signal in CW mode, it can be automatically adjusted (zero-in) to the frequency of the partner station so that it matches the received PITCH (pitch).


**Click:** If you click while receiving a CW signal, it will automatically zero in.



## S.MENU button (Spectrum scope menu display)



Displays the scope menu screen to permit settings related to the scope display.

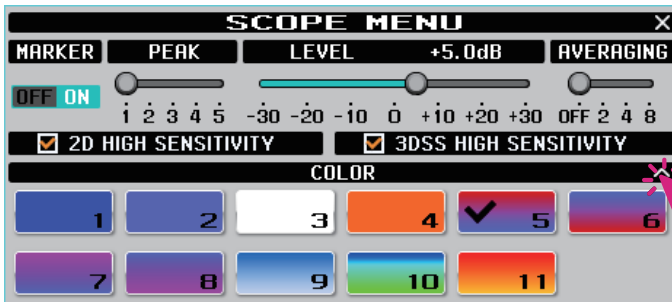

### ● MARKER




Click the button to turn the display of the receive frequency marker (green line) and transmit frequency marker (red line) ON / OFF.



When the operation of the spectrum scope is set to "CENTER", the center of the scope is always the receive frequency, so the receive frequency marker (green) is not displayed.

### ● PEAK



The color density may be adjusted to the level of the signal.

LV1: Light  
LV2: ↑  
LV3: Normal  
LV4: ↓  
LV5: Dark




The settings for this feature apply only to the remote-control software.

### ● LEVEL



Adjust the level to make it easier to distinguish between the desired signal and noise.

● **AVERAGING**



Waveforms are averaged and displayed smoothly.

OFF: Do not average

2 to 8: Display averaging ON



- The AVERAGING setting is common to the MAIN band / SUB band spectrum scope screens.
- This function is available only with the remote-control software.

● **2D HIGH SENSITIVITY**




If a check mark is added, the waterfall display sensitivity will be emphasized.

● **3DSS HIGH SENSITIVITY**



If a check mark is added, the 3DSS display sensitivity will be emphasized.

● **COLOR**

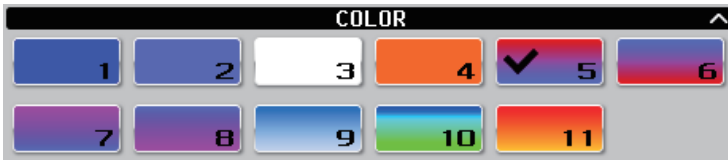


Click the preferred colors to select the display colors.



- The settings for this feature apply only to the remote-control software.

# Oscilloscope / AF-FFT area

## Screen operation

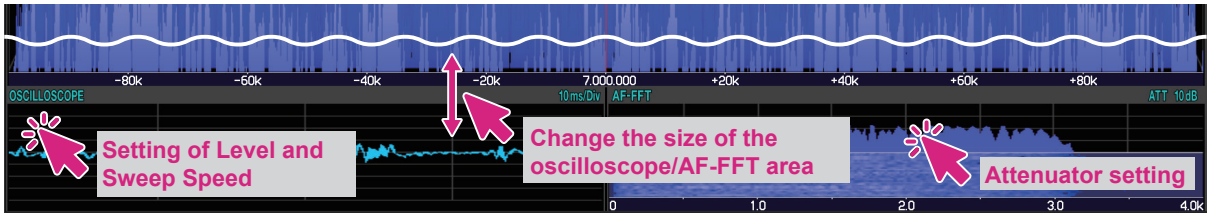

- **Resize oscilloscope / AF-FFT area**

The size\* of the oscilloscope / AF-FFT display area can be reduced by dragging the title bar at the top of the oscilloscope / AF-FFT area.

\*Click and hold the screen layout icon  at the top of the screen to initialize the size.

- **Click to set the level and sweep speed of the oscilloscope**

Click in the oscilloscope display area to set the waveform display level and time axis scale.




- **Attenuator setting (AF-FFT)**

You can set the attenuator by clicking inside the AF-FFT display area.



- **Change the display position**

You can change the display position of the oscilloscope screen and AF-FFT screen by clicking and holding the [MULTI] button during "Multi display".

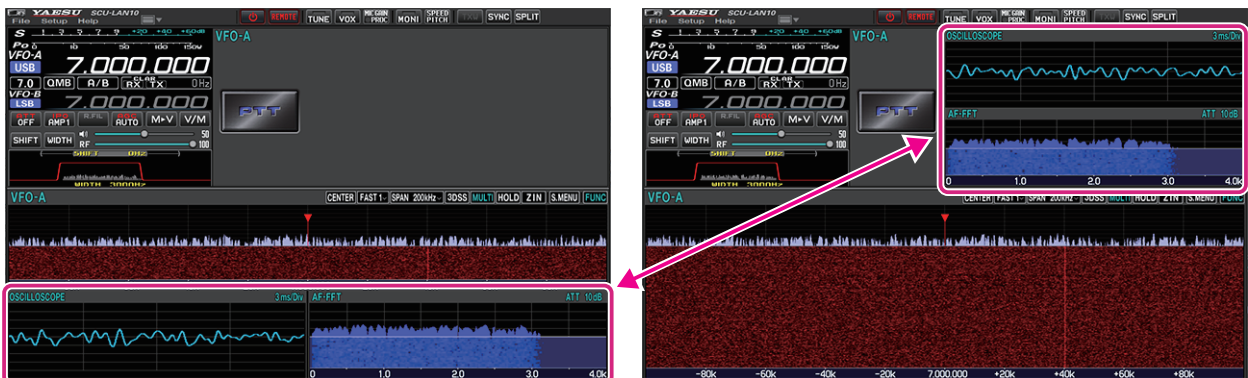

## VFO-A / VFO-B operation area



## Meter operation selection during transmit



**Click:** To select the meter operation during transmit:



- PO: Transmission output display
- ALC: ALC voltage display
- SWR: Antenna SWR display
- COMP: AMC gain control display  
(Compression level display when the speech processor is operating)
- ID: Final stage FET Drain current display
- VDD: Final stage FET Drain voltage display

## Selecting the memory channel

---




**Wheel:** Select the memory channel during a memory channel recall.

## Selecting the QMB channel

---



**Wheel:** Select the QMB channel during a QMB channel recall.

 Keyboard shortcuts  
q key

## Selecting the operating mode

---




**Click:** Select the operating mode.



**Right Click:** Switch between the following modes with one touch.


**LSB** ↔ **USB**  
**CW-L** ↔ **CW-U**  
**AM** ↔ **AM-N**  
**FM** ↔ **FM-N**  
**DATA-L** ↔ **DATA-U**  
**DATA-FM** ↔ **D-FM-N**  
**RTTY-L** ↔ **RTTY-U**

Keyboard shortcuts  
 LSB/USB: F1 key  
CW-L/CW-U: F2 key  
AM: F3 key  
FM: F4 key

# Frequency change operation

## Switch frequency band

Click the MHz digit or band icon to display the band selection screen.

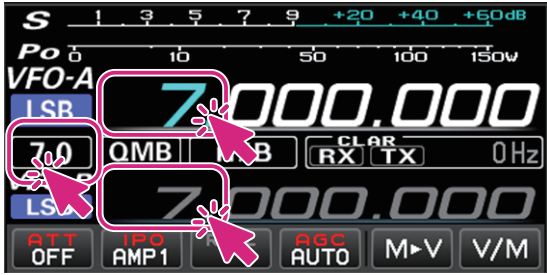

Click: Band selection



## MHz digit




Wheel: Move frequency Up / down at 1MHz

Click: Band selection



Right Click: The numeric keypad screen pops up and you can enter the frequency. You can also click with the mouse, or enter with the number keys on your computer keyboard.



### Keyboard operation:


**Enter** key: Finish the input (**ENT**)

**Backspace** key: Delete the character before the cursor (**X**)

**Delete** key: Delete the character (**CE**)

**Esc** key: Cancels input and closes the numeric keypad screen (**BACK**)

## kHz digit

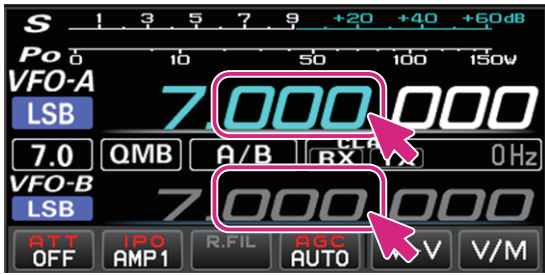


- Wheel:** Frequency moves up/down in FAST steps
- Click:** Click the upper half / lower half of the number move the frequency up/down in FAST steps
- Drag up and down:** Frequency changes up / down in FAST step
- Right Click:** Display the setting screen of FAST step / TUNING step



By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.

## Hz digit

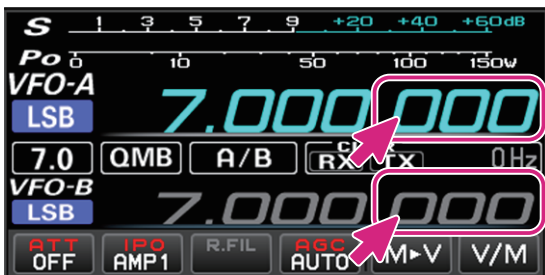

- Wheel:** Frequency goes up / down in TUNING step
- Click:** Click the upper half / lower half of the number to frequency goes up / down the frequency in TUNING steps
- Drag up and down:** Frequency continuously increases / decreases in TUNING steps
- Right Click:** Displays the FAST step / TUNING step setting screen





- In the frequency display, turning the wheel while pressing the [SHIFT] key on the keyboard does not result in the FAST step.
- By holding down the [SHIFT] key on the keyboard and clicking the number of each digit, you can zero the numbers below that digit with one touch.
- Keyboard shortcuts  
Current VFO: Page UP key / Page Down key  
Opposite VFO: Shift + Page UP key / Shift + Page Down key

## QMB Operation



**Click:** Recalls the information stored in QMB in order.



- You can select a QMB channel by turning the wheel while hovering the mouse over the QMB channel number display while recalling QMB.
- Keyboard shortcuts  
q key

**Click & Hold:** Stores up to 5 or 10 channels of the current operating status in a dedicated memory channel (QMB: Quick Memory Bank).

**Right Click:** A list of QMB memories will be displayed.



Click the QMB channels you want to delete and click the [DELETE] button to delete them.

Click the [5ch] or [10ch] button to switch the number of QMB channels.


## VFO-A / VFO-B operation



**Click:** Switch the VFO-A / VFO-B.



## CLAR (Clarifier) operation

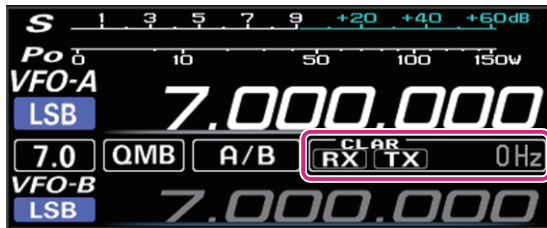


**Click:** Click the [RX] or [TX] button to turn the RX clarifier or TX clarifier ON.

**Wheel:** When the mouse wheel is rotated on the display of the offset amount (difference between reception frequency and transmission frequency), the offset amount changes in 10Hz or 100Hz steps (AM / FM / DATA-FM / D-FM-N).

**Click & Hold:** Click and hold the [RX] or [TX] button to clear the offset amount.

## Receiver setting operation

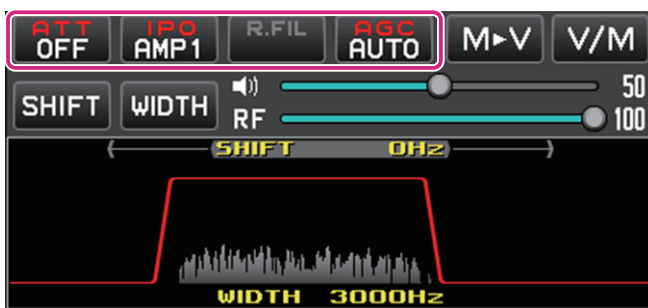

### ATT (Attenuator) button



Displays the current ATT (Amount of receive input signal attenuation).

**Click:** Select the attenuation level.



### IPO (Intercept Point Optimization) button



Displays the current IPO (Intercept Point Optimization). can establish the gain of the RF amplifier section to accommodate the connected antenna and the received signal conditions.

**Click:** Select from IPO, AMP1 (Approximately 10 dB gain) and AMP2 (Approximately 20 dB gain).



### AGC (Automatic Gain Control) button




Displays the currently selected AGC setting. The AGC system is designed to help compensate for fading and other propagation effects.

**Click:** Select from OFF, AUTO, FAST, MID and SLOW. The "AUTO" selection mode selects the optimum receiver-recovery time for the reception mode.



## Memory channel operation

---

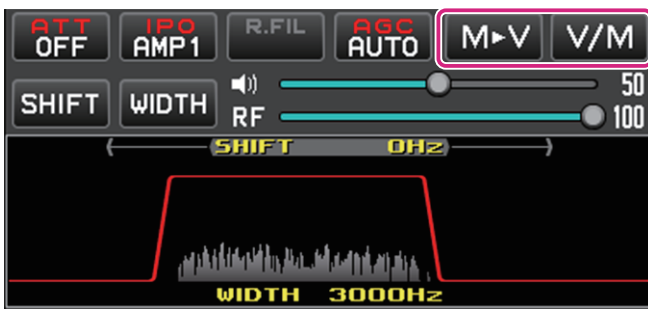

### M button



When the memory channel list is not displayed:

**Click:** The last used VFO memory may be copied to VFO-A.

### V/M button



When the memory channel list is not displayed:

**Click:** The VFO and the last used memory channel will be recalled alternately. You can select a Memory channel by turning the wheel while hovering the mouse over the Memory channel number display while recalling Memory.

**Click & Hold:** Open the memory channel list.

When the memory channel list is displayed:

**Click:** Close the memory channel list.

## Memory channel list operation

CH	FREQ	MODE	NAME	SCAN MEMORY	DISPLAY TYPE
M-01	7.000.000	LSB		SCAN	FREQ
M-02	7.000.000	LSB		SCAN	FREQ
M-03	14.000.000	USB	YAESU	SCAN	FREQ
M-04	--.---.---	-----	-----	----	----
M-05	--.---.---	-----	-----	----	----
M-06	--.---.---	-----	-----	----	----

GET DATA    RECALL    M > VFO    VFO > M    ERASE

SEND DATA



The window can be expanded to increase the number of channels displayed by dragging the bottom border of the memory channel list screen.

### Read memory data from radio



The data of all memory channels stored in the transceiver can be read into the remote-control software.



When memory data is read from the transceiver, the memory data currently set in the remote-control software will be overwritten.



If the memory data currently held by the remote-control software is written to a different model transceiver, the transferred initial values may not match the different model. Be very careful when writing data to other models.

**Click:** A confirmation screen is displayed. Click **[YES]** to load.

**Right click:** Displays the date and time when the memory data was last read.

### Transfer memory data to transceiver



The data of all memory channels stored in the remote-control software can be transferred to the transceiver.



In the remote-control software, in addition to the memory data stored in the transceiver, the remote-control software has memory data independently.



When reading data from a different model transceiver than the memory data currently held by the remote-control software, all the data stored in the memory channels, including the model-dependent data, is transferred and overwritten. Please be careful when reading data from other models.

**Click:** A confirmation screen is displayed. Click **[YES]** to transfer.

**Right click:** Displays the date and time when the memory data was last transferred.

### Recall memory channel



**Click:** Recall the data of the selected memory channel.

### Move memory data to VFO



**Click:** Transfers the data of the selected memory channel to the current VFO.

## Write to memory



**Click:** Writes information such as the current VFO frequency and operation mode to the selected memory channel.

## Erase / Resume Memory Channel




**Click:** Erases or restores the selected memory channel.

**Right click:** A confirmation screen is displayed. Click [YES] to initialize all memory information.



Memory channel "M-01" cannot be erased.

## Editing memory channels

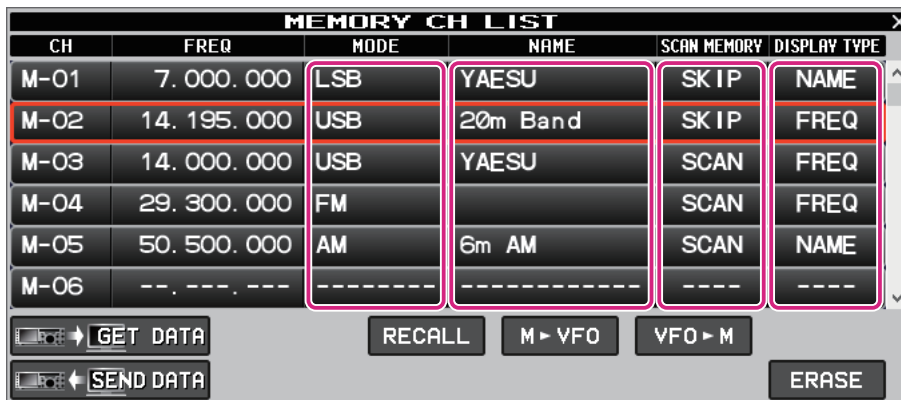

You can edit the contents of the memory channel by right-clicking the MODE, NAME, SCAN MEMORY, and DISPLAY TYPE fields.

### ● MODE

Select the operation mode.



### ● NAME

Edit the alpha tag (maximum 12 characters) of the memory channel.

### ● SCAN MEMORY

When scanning the memory, set the channels you do not want to scan to "SKIP".



### ● DISPLAY TYPE

Set the display when the memory is called to "frequency display" or "alpha tag display".



## AF Gain / RF Gain adjustment



### AF (Speaker icon)

Turn the mouse wheel over the slide bar or drag or click to adjust the receive volume.



Each time you click the speaker icon, MUTE & MUTE cancel will switch.

### RF (RF GAIN) / SQL

Turn the mouse wheel over the slide bar or drag or click to adjust the RF gain.



Right-click on RF to select whether to adjust RF gain or SQL level.

## SHIFT/WIDTH operation



### SHIFT button



**Click:** When the button is blue, the IF filter shift frequency can be changed by operating the mouse in the filter function display area.



Keyboard shortcuts  
s key

**Click & Hold:** The IF filter shift frequency returns to 0 Hz.



When the radio wave format cannot be shifted, the button is grayed out.

### WIDTH button



**Click:** When the button is blue, you can change the IF filter bandwidth by operating the mouse in the filter function display area.




Keyboard shortcuts  
w key

**Click & Hold:** The IF filter bandwidth returns to the initial value.



The button is grayed out for radio wave formats where the bandwidth cannot be changed.

## Operation of the filter function display area

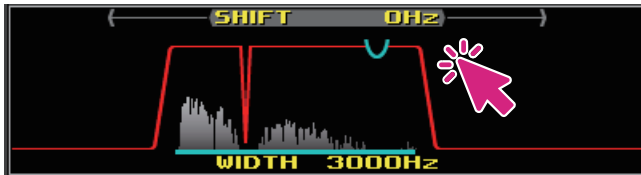

**Right Click:** You can select to show / hide the spectrum display of the signal in the filter function display area.



## Interference Reduction Systems operation

---




### NB (Noise blanker) button



**Click:** The noise blanker function turns ON / OFF.

**Right click:** The operation setting of the noise blanker function can be changed.

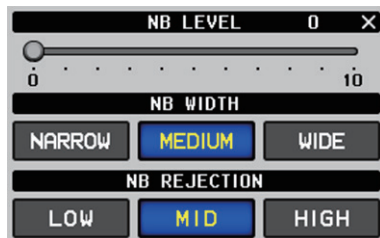

### DNR (Digital Noise Reduction) button



**Click:** The digital noise reduction function turns ON / OFF.

**Right click:** You can set the level of the digital noise reduction function.



### DNF (Digital NOTCH Filter) button



**Click:** The digital NOTCH filter function turns ON / OFF.

### NOTCH (IF NOTCH Filter) button



**Click:** The IF NOTCH filter function turns ON / OFF.



Keyboard shortcuts  
n key

**Right click:** The bandwidth of the IF NOTCH filter function can be selected.



### CONT (Contour) button




**Click:** The Contour function turns ON / OFF.



Keyboard shortcuts  
c key

**Right click:** The attenuation and bandwidth of the contour function can be set.

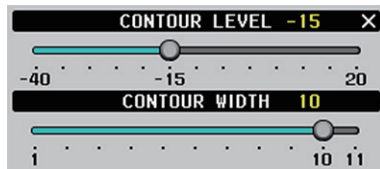

### APF (Audio Peak Filter) button



The APF function is for CW mode only.



**Click:** The APF function turns ON / OFF.

**Right click:** The bandwidth of the APF function can be set.



## PTT operation

---



### PTT button

**Click & Hold:** To transmit

---



Keyboard shortcuts  
Space key


---

**Right click:** To switch the button function between “PTT” and “MOX”.






## MENU bar

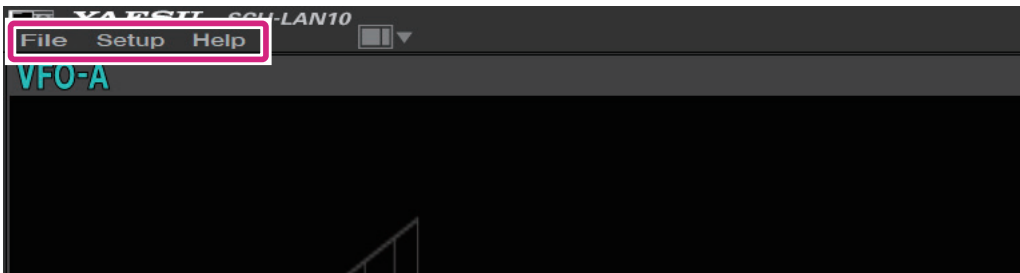


## File

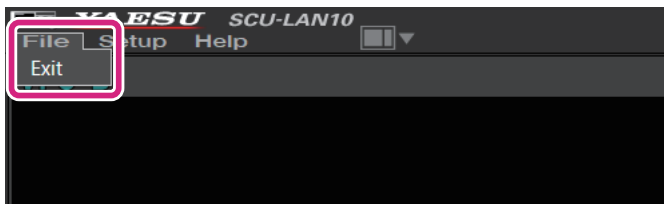


**Exit:** Closes the remote-control software.

## Setup

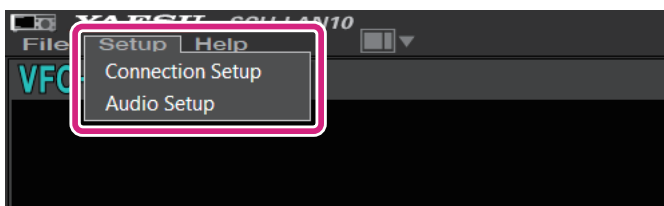


**Connection Setup:** Make settings related to connection with SCU-LAN10.  
There is no need to change it if you have set it once at the beginning.

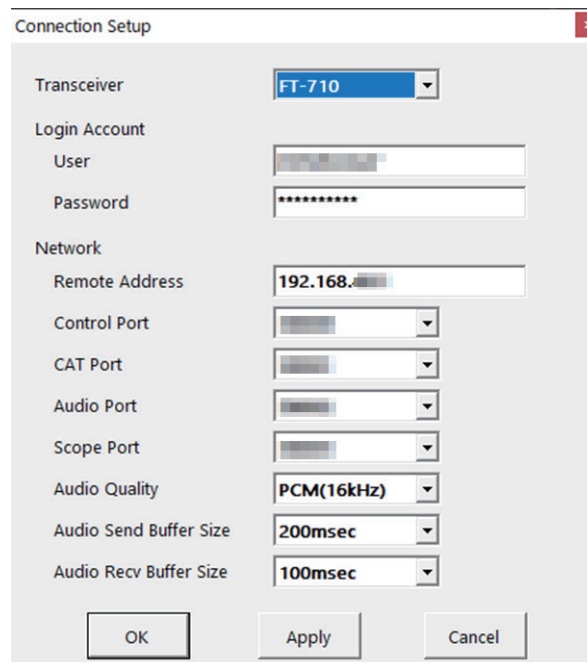

While remotely connected to the SCU-LAN10, it is grayed out and you can only check the settings.

For details, refer to the SCU-LAN10 Installation Manual.

**Audio Setup:** Opens the audio level settings screen.

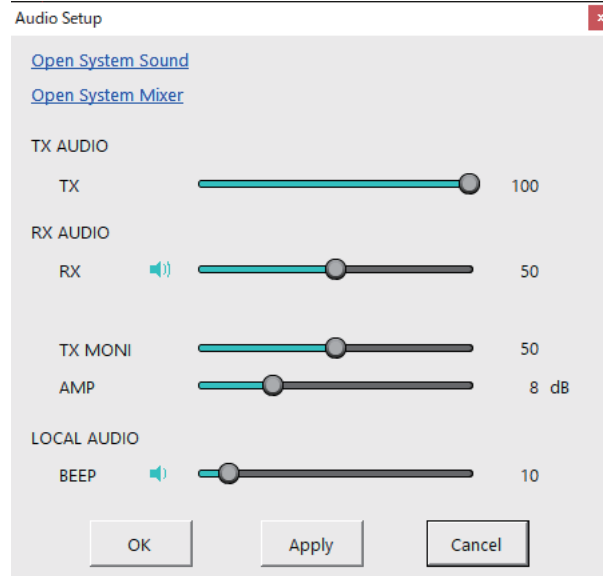

**Open System Sound**  
**Open System Mixer**


The Windows **"Sound"** screen appears.

The Windows **"Volume Mixer"** screen appears.

For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual.

**TX AUDIO**  
**TX**


Adjust the transmit modulation level.

This adjustment is the same as adjusting the MIC GAIN adjustment bar that appears when you right-click the MIC GAIN / PROC button .



**RX AUDIO**  
**RX**

Adjusts the receive volume of the MAIN band.

This adjustment is the same as adjusting the volume control bar  on the VFO operation area.



**TX MONI**

Adjusts the volume of the transmitted audio that is monitored by the monitor function.

This adjustment is the same as the MONI adjustment bar  that appears when you right-click the **MONI** button.



**AMP**

Adjust this when the receive audio of the MAIN / SUB band or the TX MONI volume is extremely low or distorted even when the Windows volume adjustment or the above volume adjustment is performed. Normally you do not need to change. (Factory setting: 8 dB)


**LOCAL AUDIO**  
**BEEP**

Adjusts the beep volume when operating the remote-control software.



If the volume is extremely low even if you adjust it on the "Audio Setup" screen, or if the sound is too loud and distorted, use Windows to adjust the volume. For details on adjusting the volume on Windows, refer to the SCU-LAN10 Installation Manual. If you are still unable to make adjustments, change the RX AUDIO "AMP" setting above.

## Help

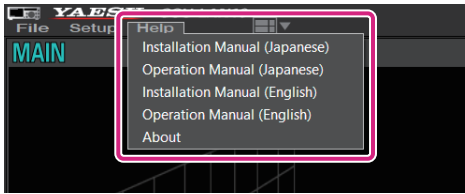

- Installation Manual (Japanese):** Open the Installation Manual (Japanese)  
**Operation Manual (Japanese):** Open the Operation Manual (Japanese)  
**Installation Manual (English):** Open the Installation Manual (English)  
**Operation Manual (English):** Open the Operation Manual (English) (This Manual)

**About:** Displays information about this software.

## Shortcut keys

The functions in the table below can be operated with the keys on the PC keyboard.

Function	Shortcut
Spectrum scope span (wide)	Cursor key Right (→)
Spectrum scope span (narrow)	Cursor key Left (←)
VFO frequency Up	Page Up key (current VFO) Shift + Page Up key (opposite VFO)
VFO frequency Down	Page Down key (current VFO) Shift + Page Down key (opposite VFO)
AF GAIN Up	Cursor key Up (↑)
AF GAIN Down	Cursor key Down (↓)
SHIFT function select	s key
WIDTH function select	w key
NOTCH function select	n key
CONTOUR function select	c key
Mode select (LSB / USB)	F1 key
Mode select (CW-L / CW-U)	F2 key
Mode select (AM)	F3 key
Mode select (FM)	F4 key
QMB recall	q key
PTT (Transmission)	Space key

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy; and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



Copyright 2023  
YAESU MUSEN CO., LTD.  
All rights reserved.

No portion of this manual may be  
reproduced without the permission of  
YAESU MUSEN CO., LTD.

**YAESU MUSEN CO., LTD.**

Omori Bellport Building D-3F  
6-26-3 Minami-Oi, Shinagawa-ku, Tokyo, 140-0013, Japan

**YAESU USA**

6125 Phyllis Drive, Cypress, CA 90630, U.S.A.

**YAESU UK**

Unit 12, Sun Valley Business Park, Winnall Close  
Winchester, Hampshire, SO23 0LB, U.K.